

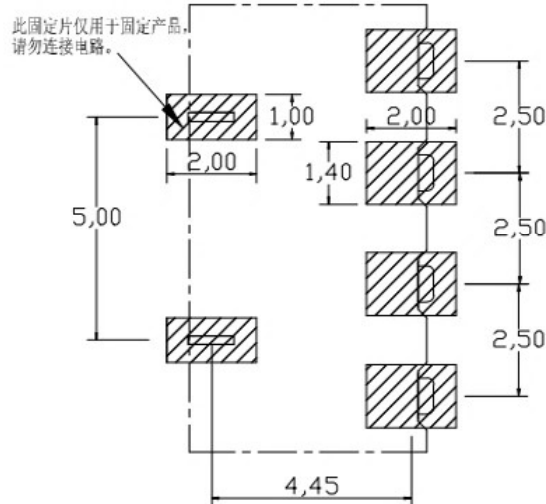
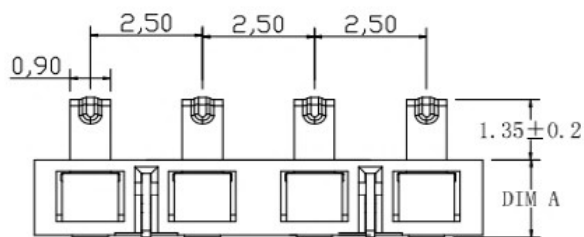
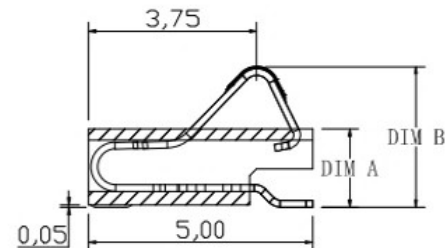
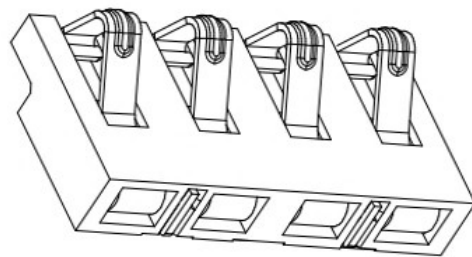


|      |         |             |        |            |
|------|---------|-------------|--------|------------|
| REV. | ECN NO. | DESCRIPTION | DESIGN | DATE       |
| A    |         | INITIAL     | Koi    | 2018.03.29 |

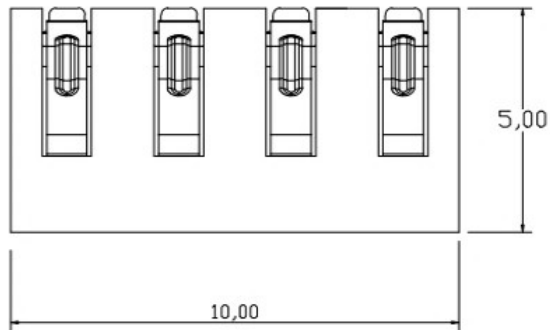

| DIM A | DIM B      |
|-------|------------|
| 1.7   | 3.00 ± 0.2 |
| 2.0   | 3.30 ± 0.2 |

RECOMMENDED PCB LAYOUT  
TOP VIEW (.XX ± 0.05)

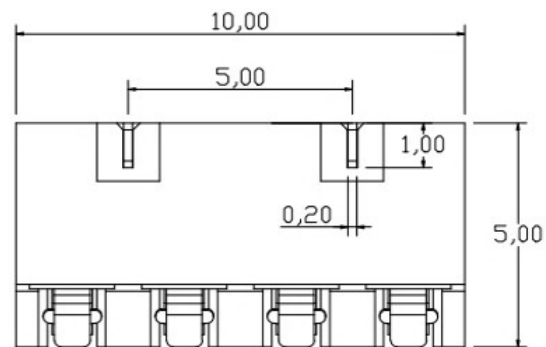

性能:  
 额定电流: 3.0A  
 额定电压: 24V  
 耐电压: 500V  
 接触电阻: 30mΩ MAX  
 绝缘电阻: 500MΩ  
 工作温度: -40℃ ~ +85℃  
 塑件(材质): LCP, 耐高温260℃  
 接触点(材质): 铜合金, 触点镀金3U'

UNLESS OTHERWISE SPECIFIED TOLERANCES

广东科斯达电器开关厂

|           |       |         |      |          |            |
|-----------|-------|---------|------|----------|------------|
| DECIMALS: |       | ANGLES: |      | DWG NO.  | PART NAME: |
| DIM       | TOL   | DIM     | TOL  | DESIGN:  | PART NO.   |
| X.        | ±0.50 | X.      | ±2°  | CHECK:   | REV. A     |
| X.X       | ±0.30 | X.X     | ±1°  | APPROVED | UNIT: mm   |
| X.XX      | ±0.20 | X.XX    | ---- |          | SHEET: 1/1 |
| X.XXX     | ±0.10 | X.XXX   | ---- |          |            |

|      |           |      |                       |             |        |
|------|-----------|------|-----------------------|-------------|--------|
| ②    | HOUSING   | 1    | LCP                   |             | BLACK  |
| ①    | CONTACT A | 2    | PHOSPHOR BRONZE 0.20T | Au PLATED   |        |
| ITEM | PART NAME | Q'TY | MATERTAL              | DESCRIPTION | REMARK |