


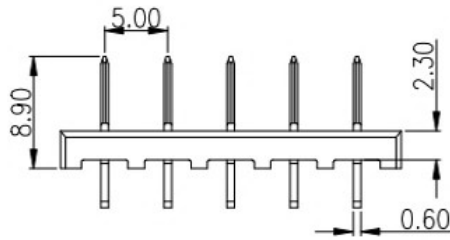
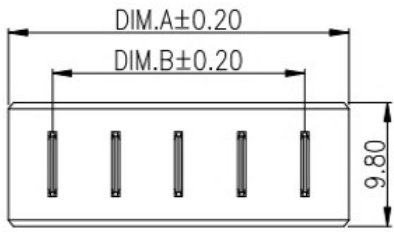


REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
A		INITIAL	Kai	2018.03.29



PIN	Dim.A	Dim.B
02pin	12.00	5.00
03pin	17.00	10.00
04pin	22.00	15.00
05pin	27.00	20.00



NOTE:

Material

Insulator:Nylon 9T(UL94V-0)

Contact:phosphor Bronze

Contact Plated:Gold over Nickel or Tin

Specification

Rated voltage: 12V 30V

Current rating: 3A 5A



instant CURRENT:7A

Contact Resistance:30MΩ


Insulation Resistance:100MΩ

Dielectric Voltage:1000V

Operdting Temperature:-40°~105°

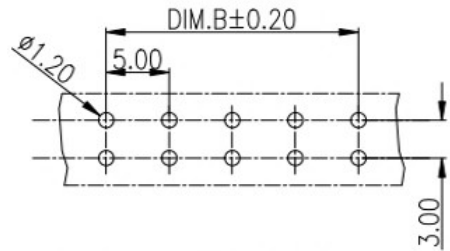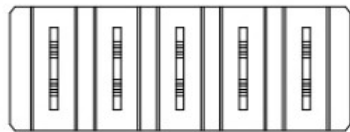

RECOMMENDED P.C. BOARD LAYOUT

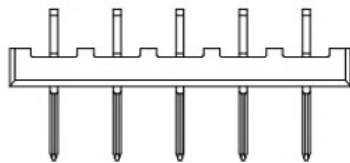

UNLESS OTHERWISE SPECIFIED TOLERANCES

广东科斯达电器开关厂

DECIMALS:

ANGLES:

DWG NO.

PART NAME:

DIM

TOL

DESIGN:

PART NO.

X. ±0.50

X. ±2°

CHECK:

X.X ±0.30


X.X ±1°

APPROVED

REV.

UNIT:

SHEET:



X.XX ±0.20

X.XX

A

mm

1/1

ITEM	PART NAME	Q'TY	MATERTAL	DESCRIPTION	REMARK
②	HOUSING	1	LCP		BLACK
①	CONTACT A	2	PHOSPHOR BRONZE 0.20T	Au PLATED	