

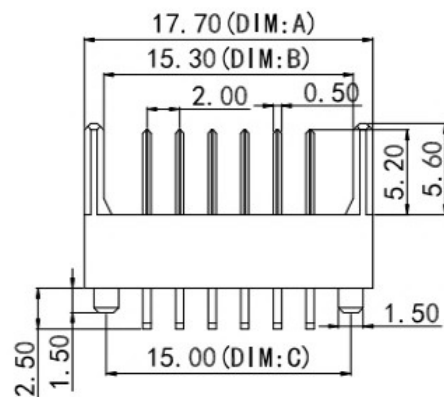
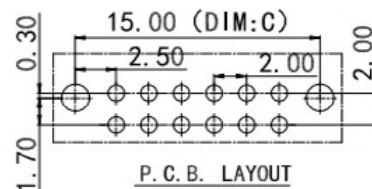
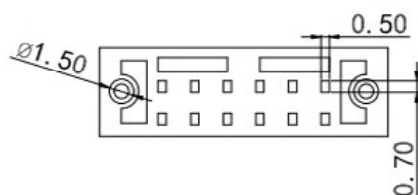



6		7		8		9	
REV.	ECN NO.	DESCRIPTION				DESIGN	DATE
A		INITIAL				Kai	2018.03.29



P. C. B. LAYOUT



NOTE:

Material

Insulator:Nylon 9T(UL94V-0)

Contact:phosphor Bronze

Contact Plated:Gold over Nickel or Tin

Specification

Rated voltage: 12V 30V

Current rating: 3A 5A

instant CURRENT:7A

Contact Resistance: 30MΩ

Insulation Resistance:100MΩ

Dielectric Voltage:1000V

Operating Temperature: $-40^{\circ} \sim 105^{\circ}$

No. of pins	Dimension		
	DIM. A	DIM. B	DIM. C
03	11.70	9.30	9.00
04	13.70	11.30	11.00
05	15.70	13.30	13.00
06	17.70	15.30	15.00
07	19.70	17.30	17.00
08	21.70	19.30	19.00
09	23.70	21.30	21.00
10	25.70	23.30	23.00
11	27.70	25.30	25.00
12	29.70	27.30	27.00

UNLESS OTHERWISE
SPECIFIED TOLERANCES

广东科斯达电器开关厂

DECIMALS:		ANGLES:		DWG NO.		PART NAME:	
DIM	TOL	DIM	TOL	DESIGN:		PART NO.	
X.	±0.50	X.	±2°	CHECK:		REV.	UNIT:
X.X	±0.30	X.X	±1°			A	mm
X.XX	±0.20	X.XX	-----	APPROVED		SHEET:	1/1
X.XXX	±0.10	X.XXX	-----				