


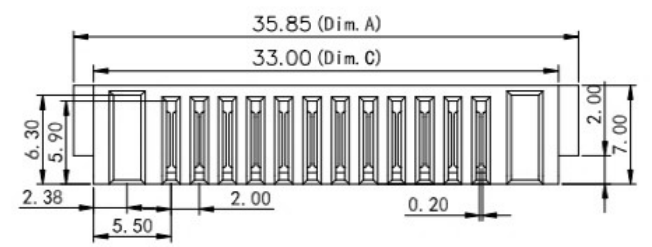
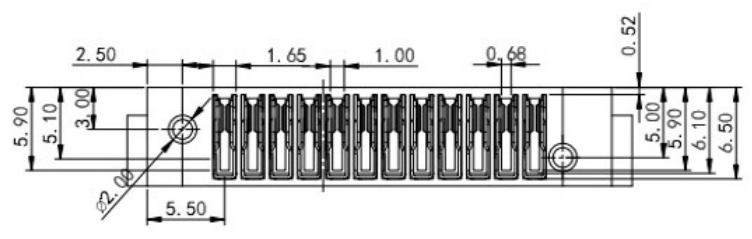


| | | | | |
|------|---------|-------------|--------|------------|
| REV. | ECN NO. | DESCRIPTION | DESIGN | DATE |
| A | | INITIAL | Kai | 2018.03.29 |

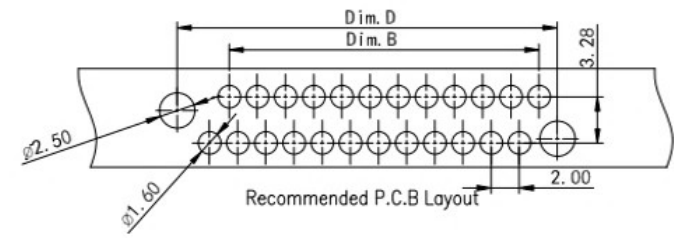

| No. of Pins | Dimension | | | |
|-------------|-----------|-------|-------|-------|
| | DIM.A | DIM.B | DIM.C | DIM.D |
| 4 | 19.85 | 17.00 | 6.00 | 11.00 |
| 5 | 21.85 | 19.00 | 8.00 | 13.00 |
| 6 | 23.85 | 21.00 | 10.00 | 15.00 |
| 7 | 25.85 | 23.00 | 12.00 | 17.00 |
| 8 | 27.85 | 25.00 | 14.00 | 19.00 |
| 9 | 29.85 | 27.00 | 16.00 | 21.00 |
| 10 | 31.85 | 29.00 | 18.00 | 23.00 |
| 11 | 33.85 | 31.00 | 20.00 | 25.00 |
| 12 | 33.85 | 33.00 | 22.00 | 27.00 |

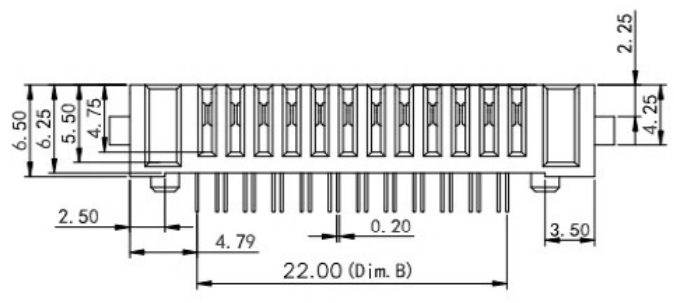

NOTE:
Material
Insulator: Nylon 9T(UL94V-0)
Contact: phosphor Bronze
Contact Plated: Gold over Nickel or Tin
Specification
Rated voltage: 12V 30V
Current rating: 3A 5A
instant CURRENT: 7A
Contact Resistance: 30MΩ
Insulation Resistance: 100MΩ
Dielectric Voltage: 1000V
Operating Temperature: -40°~105°

| | | | | | | | |
|---------------------------------------|-------|---------|------|-------------------|-------------------|----|-----|
| UNLESS OTHERWISE SPECIFIED TOLERANCES | | | | 广东科斯达电器开关厂 | | | |
| DECIMALS: | | ANGLES: | | DWG NO. | PART NAME: | | |
| DIM | TOL | DIM | TOL | DESIGN: | PART NO. | | |
| X. | ±0.50 | X. | ±2° | CHECK: | REV. UNIT: SHEET: | | |
| X.X | ±0.30 | X.X | ±1° | APPROVED | A | mm | 1/1 |
| X.XX | ±0.20 | X.XX | ---- | | | | |
| X.XXX | ±0.10 | X.XXX | ---- | | | | |

| ITEM | PART NAME | Q'TY | MATERIAL | DESCRIPTION | REMARK |
|------|-----------|------|-----------------------|-------------|--------|
| ② | HOUSING | 1 | LCP | | BLACK |
| ① | CONTACT A | 2 | PHOSPHOR BRONZE 0.20T | Au PLATED | |