

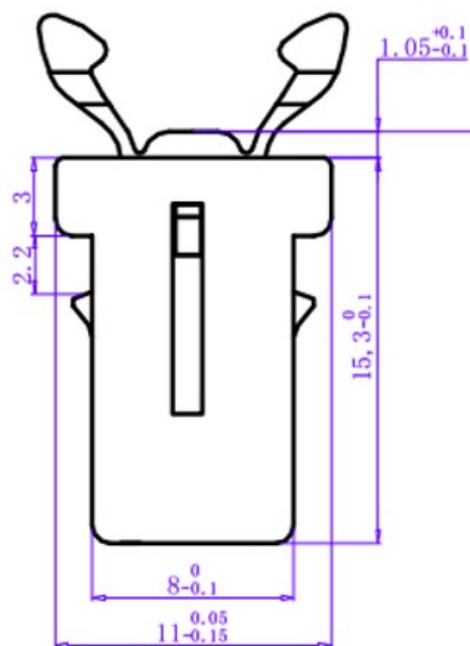
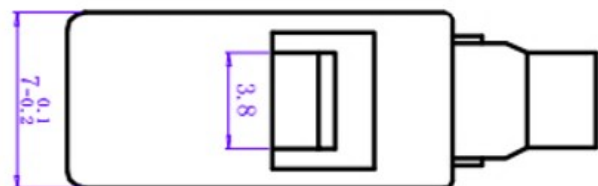
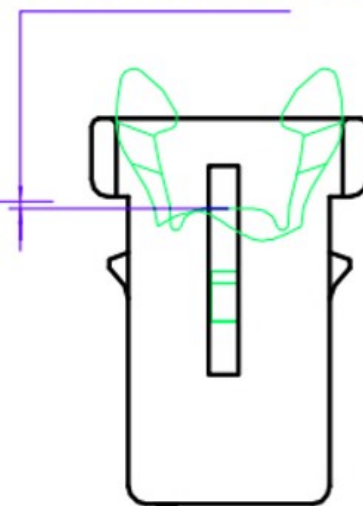


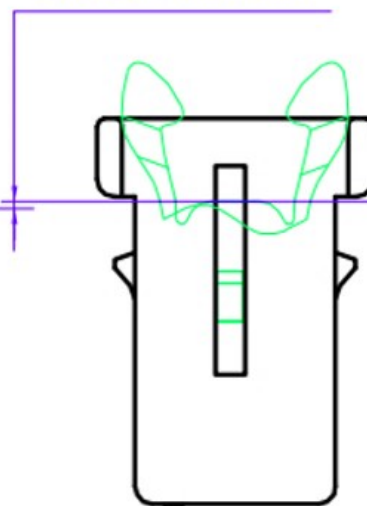


下压5.6mm 达到锁定行程

回弹1.1mm 呈锁住状态

继续下压1.1mm 即达到开锁行程

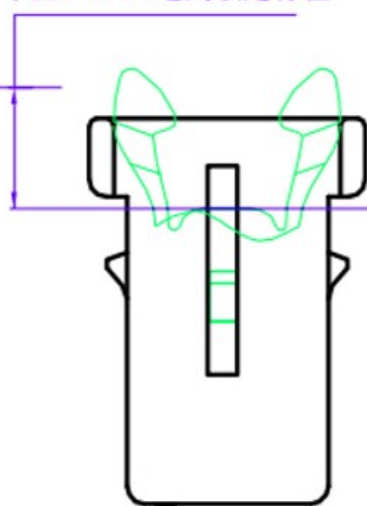

锁舌参考尺寸



※ 两侧必须做倒角 R0.3

※ 锁舌长度
不得短于 5.8mm

※ 注: 锁舌厚度或者直径不能大于 5.7mm

外壳: POM

按键: PA66






弹簧: SUS304

钩针: SUS304

脱钩力: 20N

注: 未标公差的尺寸公差为 ± 0.1 mm

TITLE	DOOR LATCH SWITCH	DRAWN		TOLERANCE OTHERWISE UNLESS SPECIFIED	8				
PART NO.	Lock switch	CHECKED		UP TO 5	± 0.2	6			
DRAW NO.		APPROVED		ABOVE 5 ~ 30	± 0.3	5			
				ABOVE 30 ~ 50	± 0.4	4			
				ABOVE 50	± 0.5	3	SPRING	SUS	1 Ni PLATED
SCALE: 2:1	UNIT: mm	DATE:		ANGLE	$\pm 3'$	2	HOUSING	POM	1 BLACK
						1	SLIDER	PA12	1 BLACK
						NO.	PARTS	MATERIAL	QTY. FINISHING
 广东科斯达开关厂					WWW.KSDKG.COM WWW.BODONGKAIGUAN.NET				

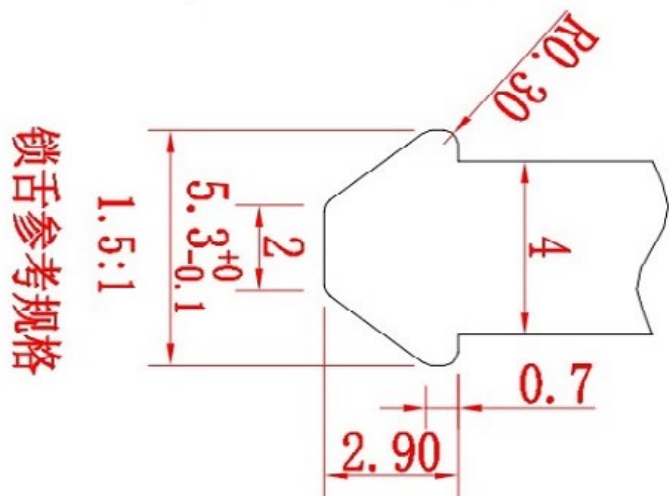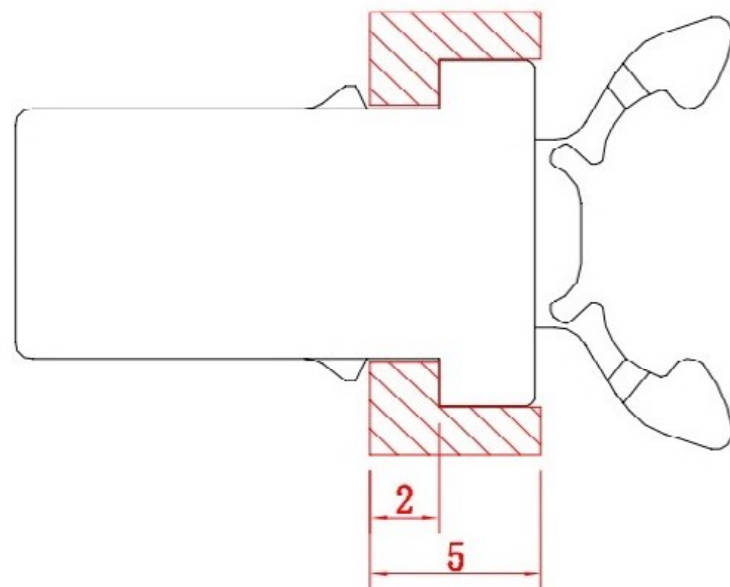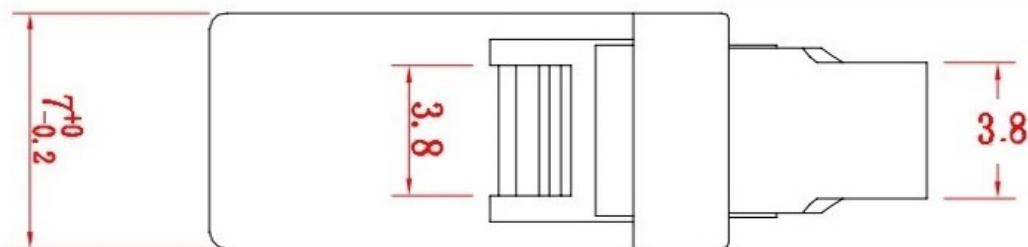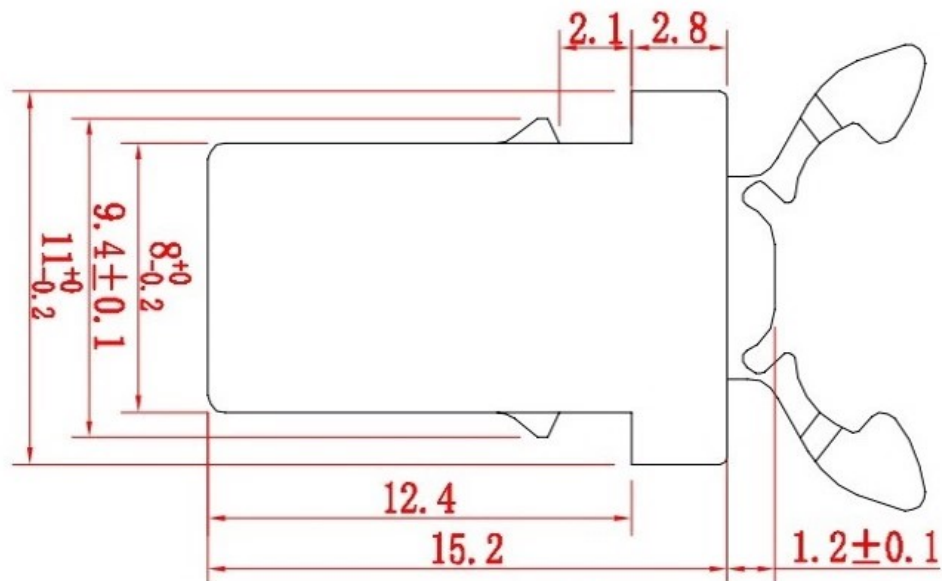

安装孔参考规格

TITLE	DOOR LATCH SWITCH	DRAWN		TOLERANCE OTHERWISE UNLESS SPECIFIED		8				
PART NO.		CHECKED				7				
DRAW NO.		APPROVED		UP TO 5	±0.2	6				
				ABOVE 5 ~ 30	±0.3	5				
				ABOVE 30 ~ 50	±0.4	4				
				ABOVE 50	±0.5	3	SPRING	SUS	1	Ni PLATED
SCALE: 2:1	UNIT: mm	DATE:		ANGLE	±3°	2	HOUSING	POM	1	BLACK
						1	SLIDER	PA12	1	BLACK
						NO.	PARTS	MATERIAL	QTY.	FINISHING
 广东科斯达开关厂						WWW.KSDKG.COM WWW.BODONGKAIGUAN.NET				