
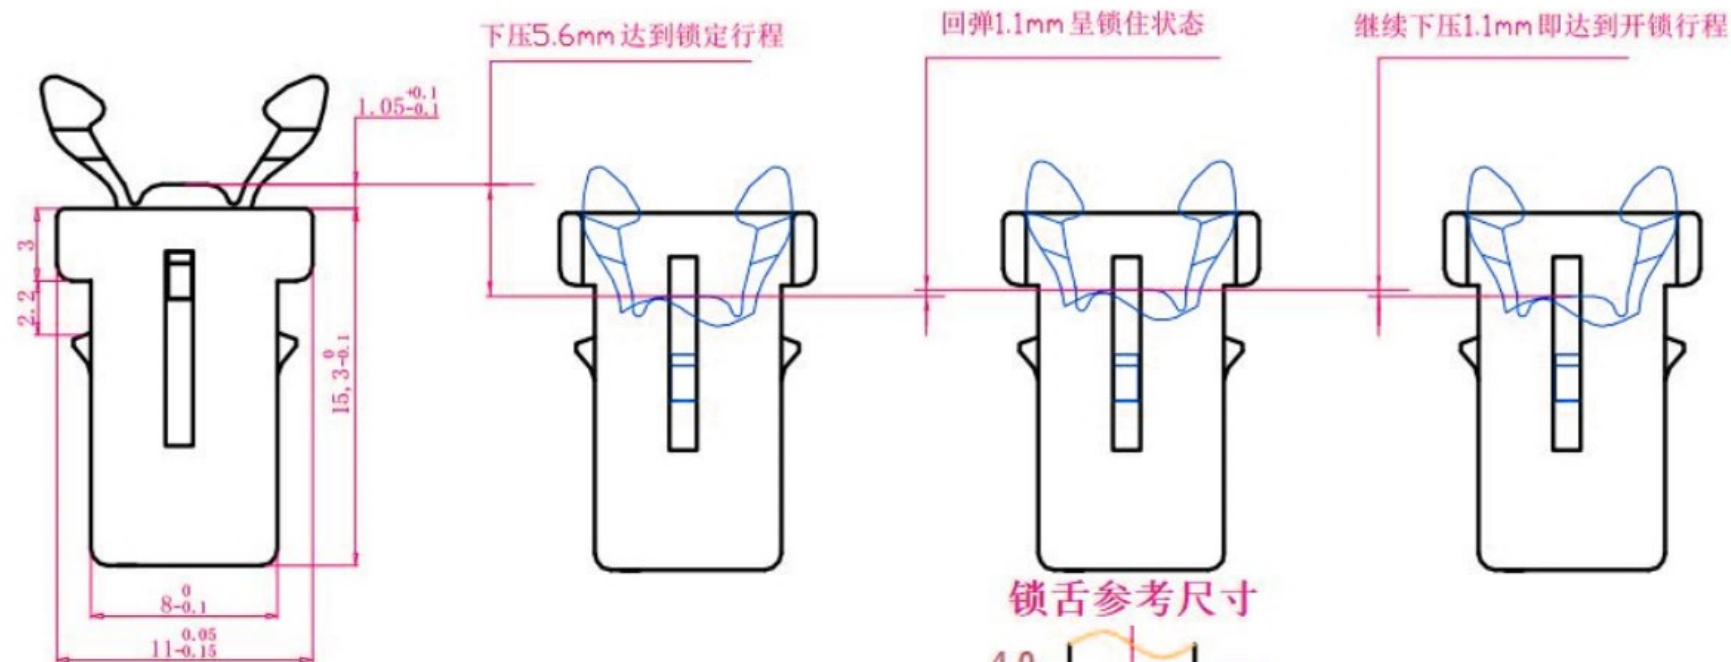


※ 两侧必须做倒角 R0.3

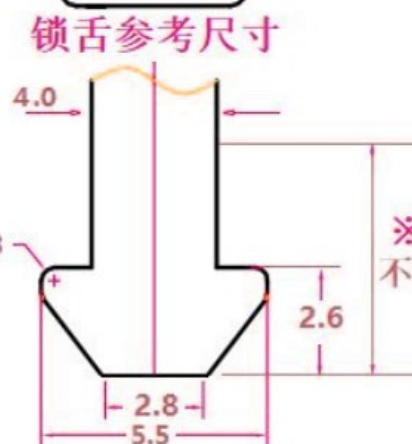

※ 锁舌长度
不得短于5.8mm

外壳: POM
按键: PA66
弹簧: SUS304
钩针: SUS304
脱钩力: 20N

注: 未标公差的尺寸公差为±0.1mm ※ 注: 锁舌厚度或者直径不能大于5.7mm

TITLE	DOOR LATCH SWITCH	DRAWN		TOLERANCE OTHERWISE UNLESS SPECIFIED	8				
PART NO.	Lock switch	CHECKED		UP TO 5	±0.2	6			
DRAW NO.		APPROVED		ABOVE 5 ~ 30	±0.3	5			
				ABOVE 30 ~ 50	±0.4	4			
				ABOVE 50	±0.5	3	SPRING	SUS	1 Ni PLATED
SCALE: 2:1	UNIT: mm	DATE:		ANGLE	±3°	2	HOUSING	POM	1 BLACK
						1	SLIDER	PA12	1 BLACK
						NO.	PARTS	MATERIAL	QTY. FINISHING
 广东科斯达开关厂					WWW.KSDKG.COM WWW.BODONGKAIGUAN.NET				