



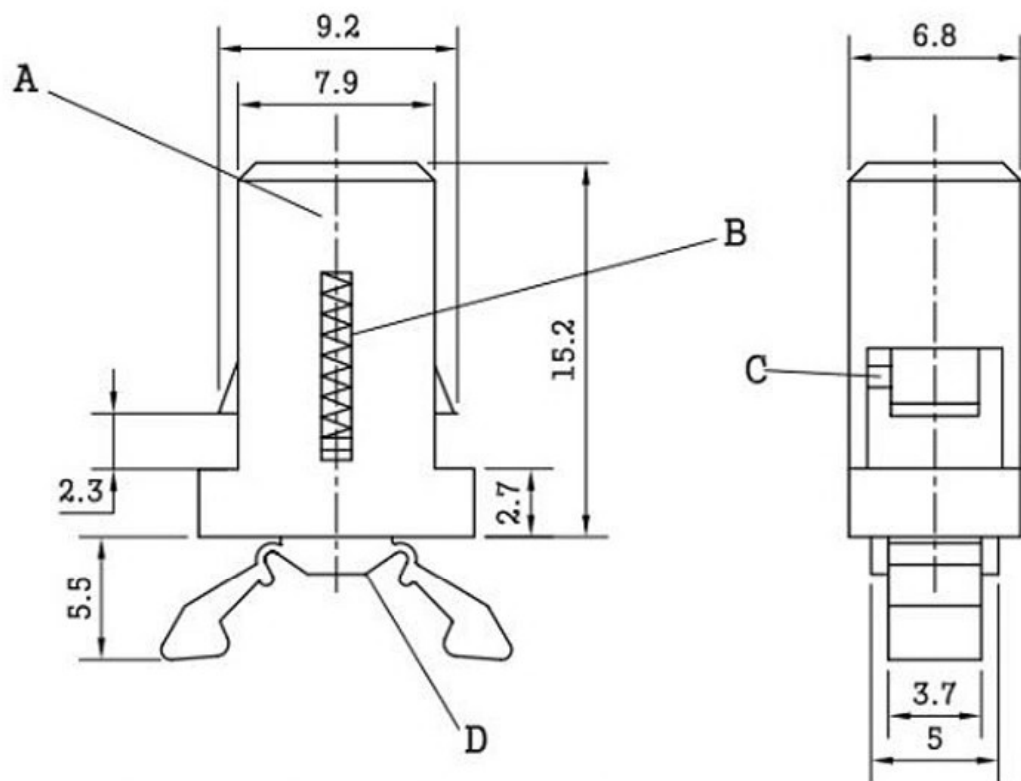

注：未标注公差为 ± 0.1

建议安装孔尺寸

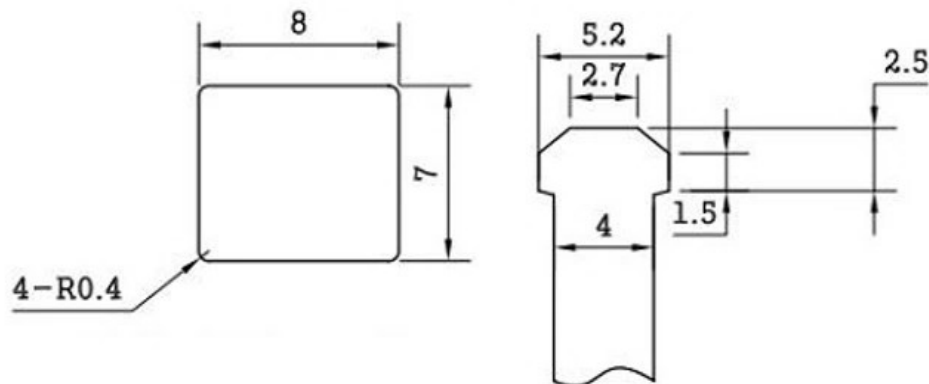

建议挂钩尺寸

主要技术规格：

寿命次数：100000次

按力：4-6N

温度范围： -25°C ~ $+85^{\circ}\text{C}$

耐压：AC 250V (50Hz) /min

绝缘电阻： $\geq 100\text{M}\Omega$

承受最大拉力：20N

TITLE	DOOR LATCH SWITCH	DRAWN		TOLERANCE OTHERWISE UNLESS SPECIFIED	8				
PART NO.	Lock switch	CHECKED		UP TO 5	± 0.2	6			
DRAW NO.		APPROVED		ABOVE 5 ~ 30	± 0.3	5			
				ABOVE 30 ~ 50	± 0.4	4			
				ABOVE 50	± 0.5	3	SPRING	SUS	1 Ni PLATED
SCALE: 2:1	UNIT: mm	DATE:		ANGLE	$\pm 3^{\circ}$	2	HOUSING	POM	1 BLACK
						1	SLIDER	PA12	1 BLACK
						NO.	PARTS	MATERIAL	QTY. FINISHING
 广东科斯达开关厂					WWW.KSDKG.COM WWW.BODONGKAIGUAN.NET				