

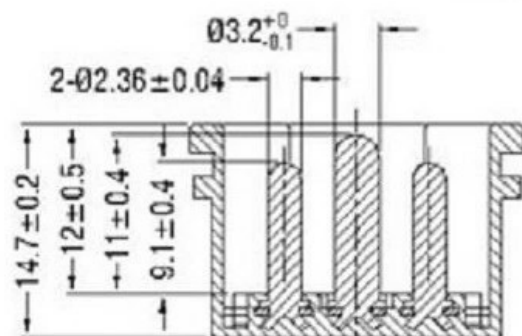


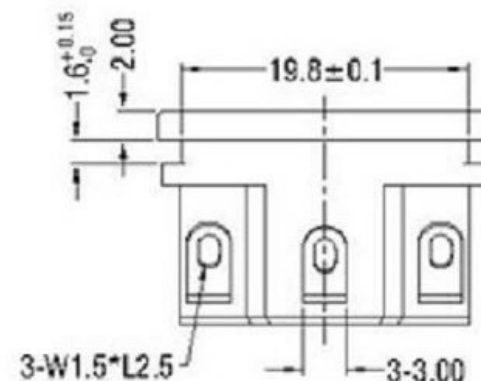

SECTION: A-A

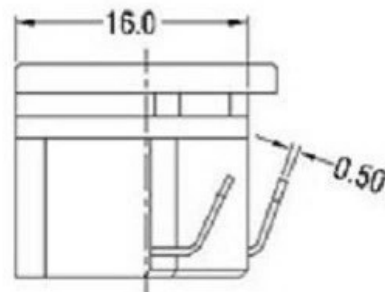

SPEC:

A. Material:



1. Housing: PC UL 94V-0
2. Terminal: COPPER ALLOY, TIN PLATED

B. Electrical Characteristics:

1. Rating: 2.5A 250V ~ (UL,CUL,CCC,ENEC,KC,VDE)
7A 125V~(UL,CUL)
2. Electric Strength: AC 3,000 V FOR ONE MINUTE
3. Insulation Resistance: 100MΩ MIN. AT 500V DC

C. Approvals:

UL, CUL, CCC, ENEC, KC, VDE

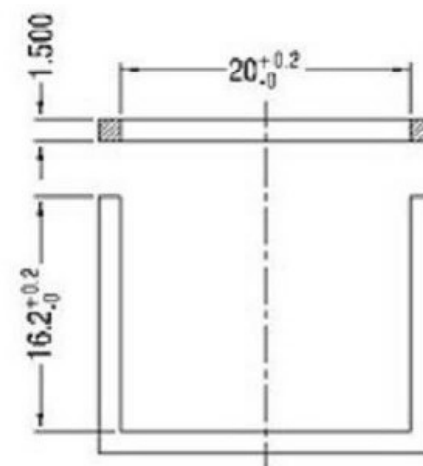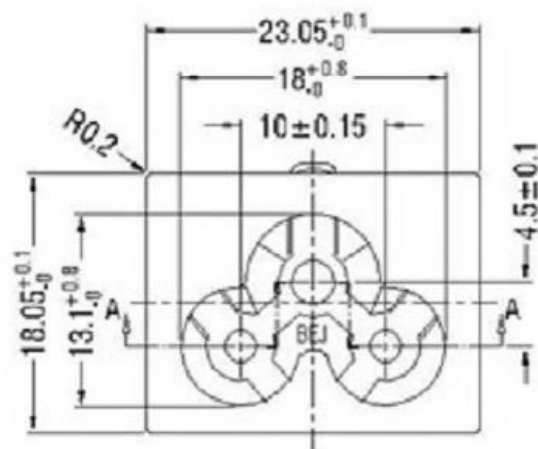

PANEL CUT-OUT

				普通公差		 广东科斯达电子科技有限公司					
				COMMON TOLERANCE :		Guang dong Keside Electronic Technology Co., Ltd.					
				UP TO 5	±0.20	单 位	mm	投 影		品 名	AC power socket
				ABOVE 5 TO 30	±0.30	绘 图	林晓良	核 对	张 平	型 号	
				ABOVE 30	±0.50	DRAWN BY		CHECKED BY		MODEL NO.	
REV.	DATE	REVISION DESCRIPTION	ISSUE	ANGULAR	±5°	日 期	19. 08. 12	核 准	周培雷	料 号	KSD-AC JACK
						DATE		APPROVAL BY		PART NO.	