




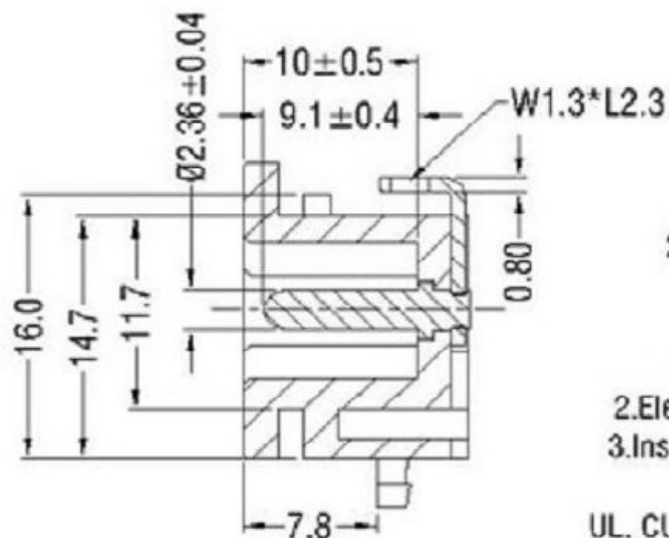

MARK

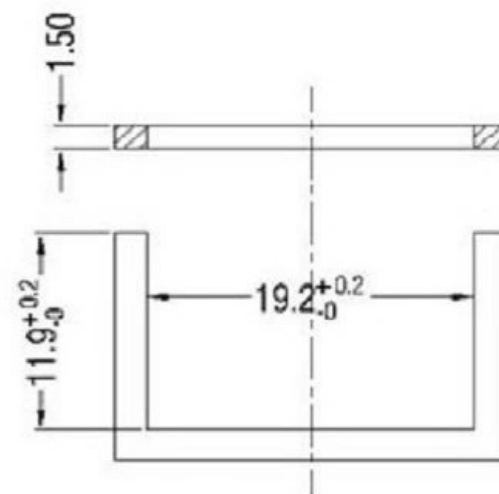

SECTION: A-A

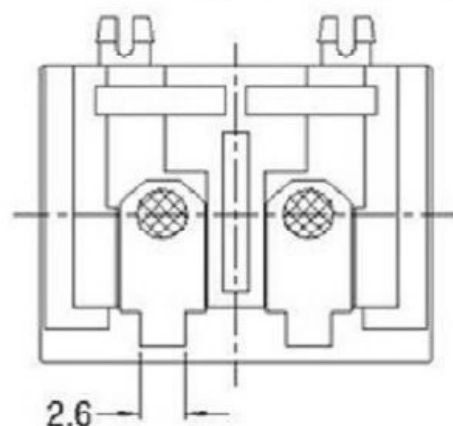

PANLE CUT-OUT

SPEC:

A. Material:

1.Housing: PC

2. Terminal: COPPER ALLOY, TIN PLATED

B. Electrical Characteristics:

1.Rating: 2.5A 250V~

(UL, CUL, CCC, VDE, SEMKO, NEMKO, FIMKO, DEMKO)

2.Electric Strength: AC 2,000 V FOR ONE MINUTE

3. Insulation Resistance: 100MΩ MIN. AT 500V DC

C Approvals:

UL, CUL, CCC, VDE, SEMKO, NEMKO, FIMKO, DEMKO

				普通公差		 广东科斯达电子科技有限公司 Guang dong Keside Electronic Technology Co., Ltd.					
				COMMON TOLERANCE :							
				UP TO 5	±0.20	单 位 UNIT	mm	投 影 PROJECTED		品 名 PRODUCT NAME	AC power socket
				ABOVE 5 TO 30	±0.30	绘 图 DRAWN BY	林晓良	核 对 CHECKED BY	张 平	型 号 MODEL NO.	
				ABOVE 30	±0.50	日 期 DATE	19.08.12	核 准 APPROVAL BY	周培雷	料 号 PART NO.	KSD-AC JACK
REV.	DATE	REVISION DESCRIPTION	ISSUE	ANGULAR	±5°						