




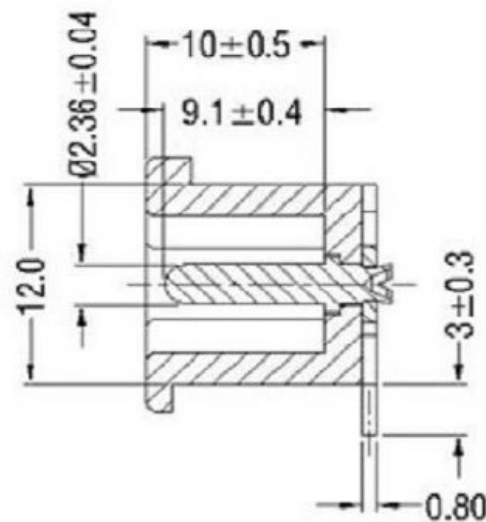

SECTION: A-A

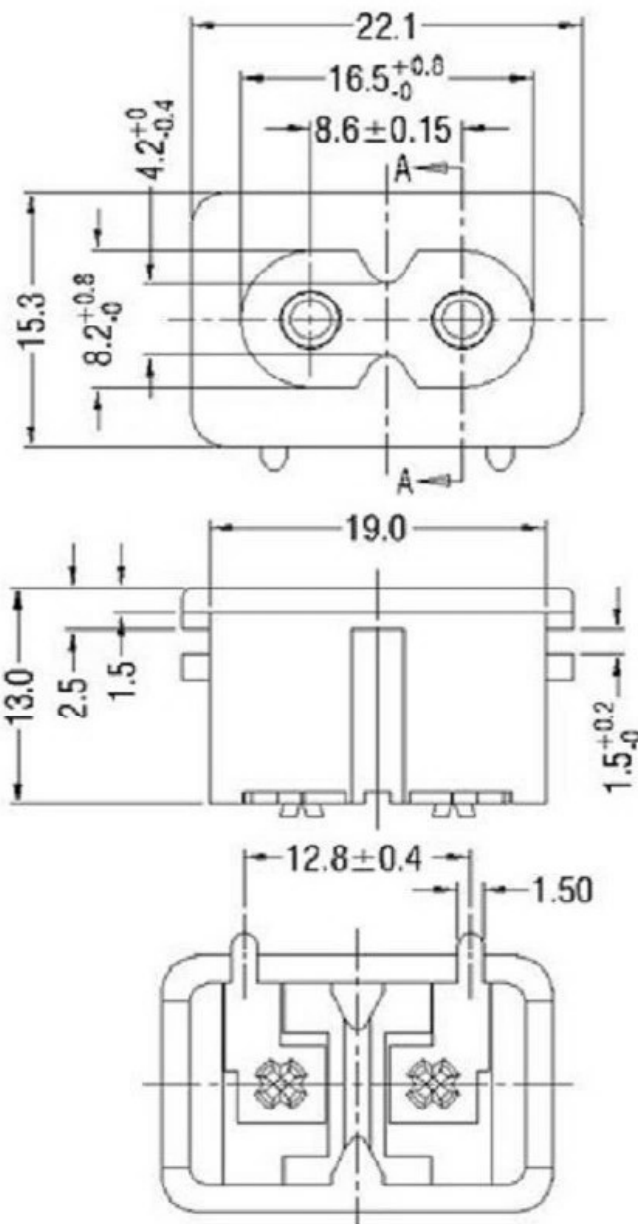

MARK

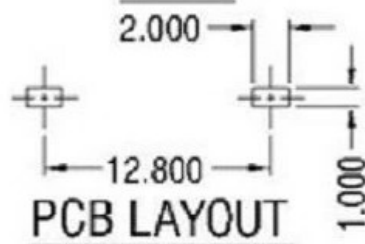

PCB LAYOUT

SPEC:

A. Material:


1. Housing: PA66 WITH G/F10%
2. Terminal: COPPER ALLOY, TIN PLATED

B. Electrical Characteristics:

1. Rating: 2.5A 250V~
(UL, CUL, CCC, VDE, SEMKO, NEMKO, FIMKO, DEMKO)
2. Electric Strength: AC 2,000 V FOR ONE MINUTE
3. Insulation Resistance: 100MΩ MIN, AT 500V DC

C. Approvals:

UL, CUL, CCC, VDE, SEMKO, NEMKO, FIMKO, DEMKO

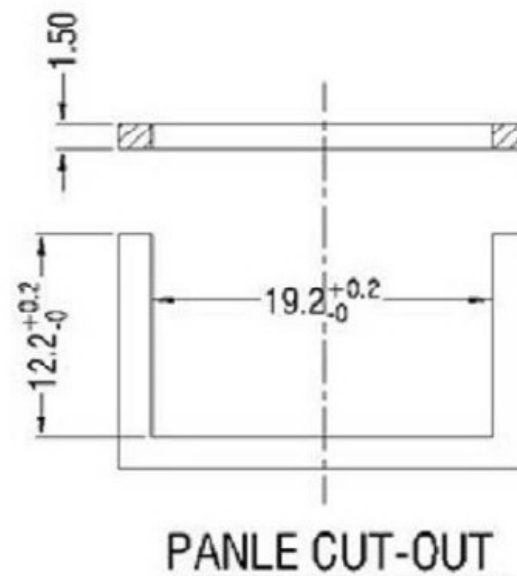

PANLE CUT-OUT

				普通公差		 广东科斯达电子科技有限公司					
				COMMON TOLERANCE :		Guang dong Keside Electronic Technology Co., Ltd.					
				UP TO 5	±0.20	单 位	mm	投 影		品 名	AC power socket
				ABOVE 5 TO 30	±0.30	绘 图	林晓良	核 对	张 平	型 号	
				ABOVE 30	±0.50	DATE	19. 08. 12	核 准	周培雷	料 号	
REV.	DATE	REVISION DESCRIPTION	ISSUE	ANGULAR	±5°	日期	19. 08. 12	APPROVAL BY		PART NO.	KSD-AC JACK