

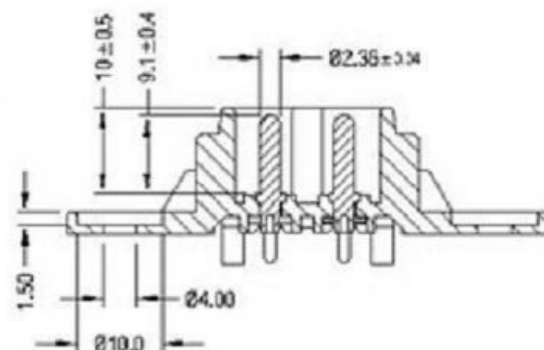
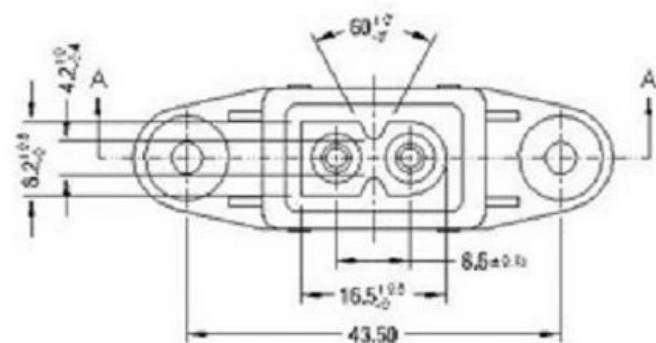
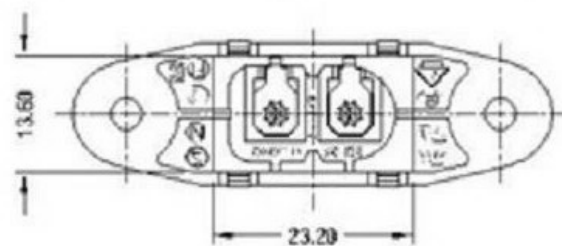




SECTION A-A

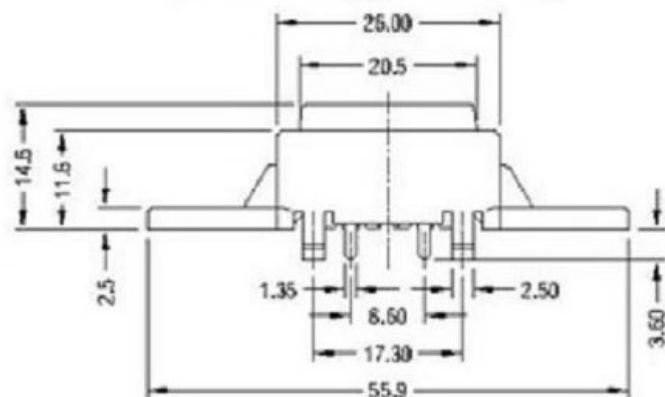

SPEC:

A. Material:

1. Housing: PC

2. Terminal: COPPER ALLOY, TIN PLATED

B. Electrical Characteristics:


1. Rating: 2.5A 250V~(UL, CUL, VDE, CCC, SEMKO, DEMKO, FIMKO, IEMKO)

2. Electric Strength: AC 2,000 V FOR ONE MINUTE

3. Insulation Resistance: 100MΩ MIN, AT 500V DC

C. Approvals:

UL, CUL, VDE, CCC, SEMKO, DEMKO, FIMKO, IEMKO, KC

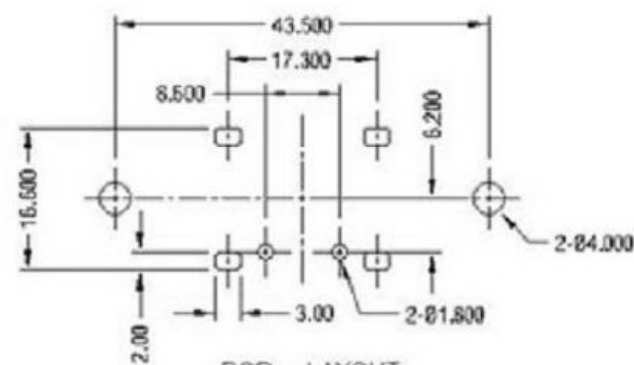

PCB LAYOUT
THICKNESS: 1.6mm

普通公差

COMMON TOLERANCE :

UP TO 5	±0.20
ABOVE 5 TO 30	±0.30
ABOVE 30	±0.50
ANGULAR	±5°

单位	mm
绘图	林晓良
日期	19. 08. 12



广东科斯达电子科技有限公司
Guang dong Keside Electronic Technology Co., Ltd.

投影	张平
核对	周培雷
核准	

品名	AC power socket
型号	
料号	KSD-AC JACK

REV.	DATE	REVISION DESCRIPTION	ISSUE