


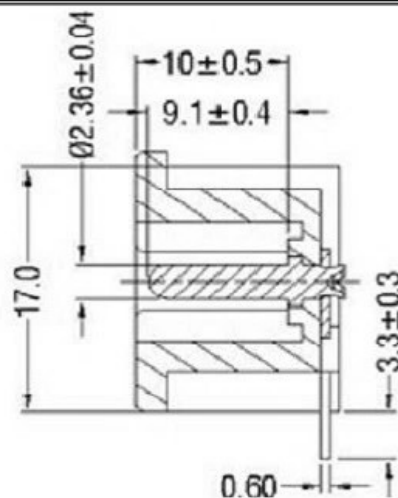
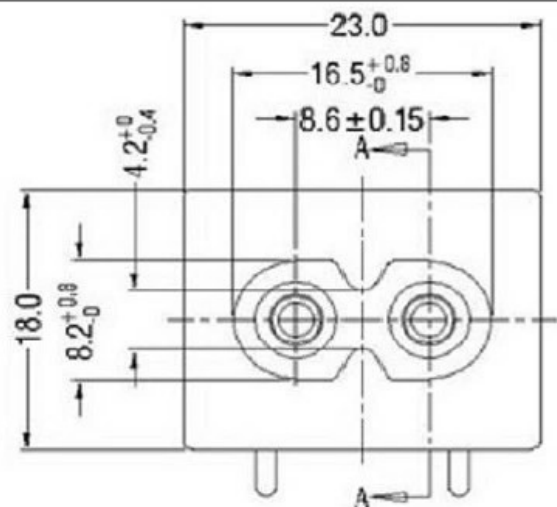
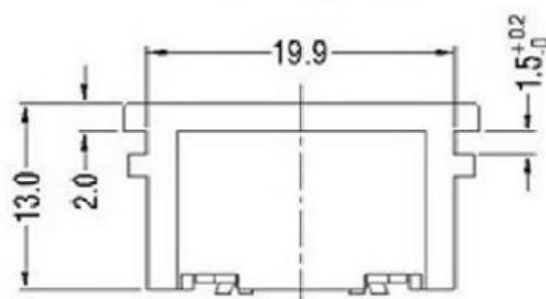


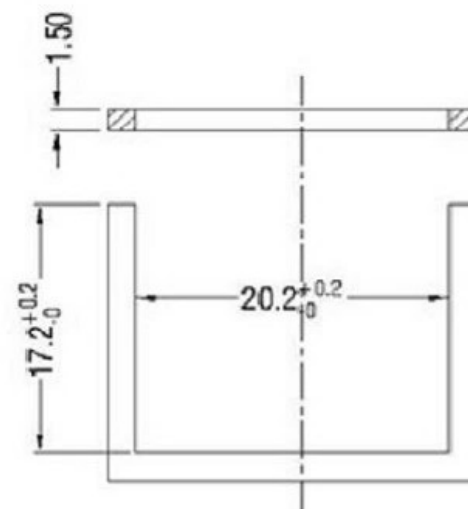

SECTION: A-A

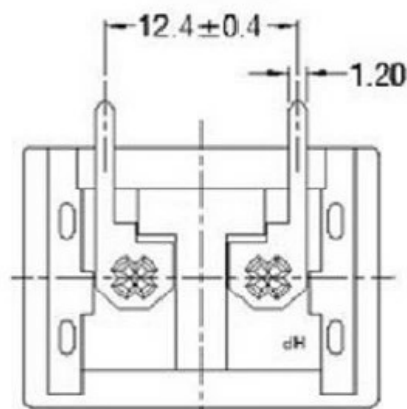

MARK

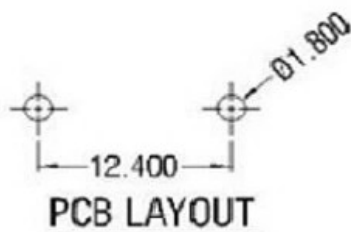

PANLE CUT-OUT

SPEC:

A. Material:

1.Housing: PA66(HP)

2.Terminal: COPPER ALLOY, TIN PLATED

B.Electrical Characteristics:

1.Rating: 2.5A 250V~

(UL, CUL, CCC, VDE, SEMKO, NEMKO, FIMKO, DEMKO, KC)

2.Electric Strength: AC 2,000 V FOR ONE MINUTE

3.Insulation Resistance: 100MΩ MIN, AT 500V DC

C.Approvals:

UL, CUL, CCC, VDE, SEMKO, NEMKO, FIMKO, DEMKO, KC

普通公差

COMMON TOLERANCE:

UP TO 5	±0.20
ABOVE 5 TO 30	±0.30
ABOVE 30	±0.50
ANGULAR	±5°

单位	mm
绘图	林晓良
日期	19. 08. 12



广东科斯达电子科技有限公司
Guang dong Keside Electronic Technology Co., Ltd.

投影	张平
核对	周培雷
核准	

品名	AC power socket
型号	
料号	KSD-AC JACK

品名	AC power socket
型号	
料号	KSD-AC JACK

AC power socket

KSD-AC JACK

REV.	DATE	REVISION DESCRIPTION	ISSUE