
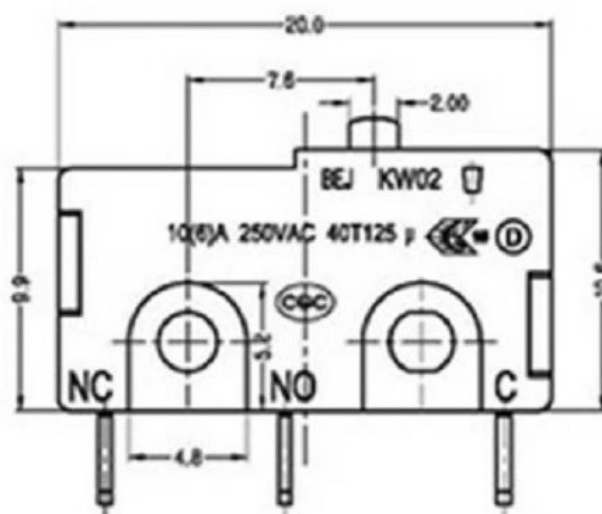


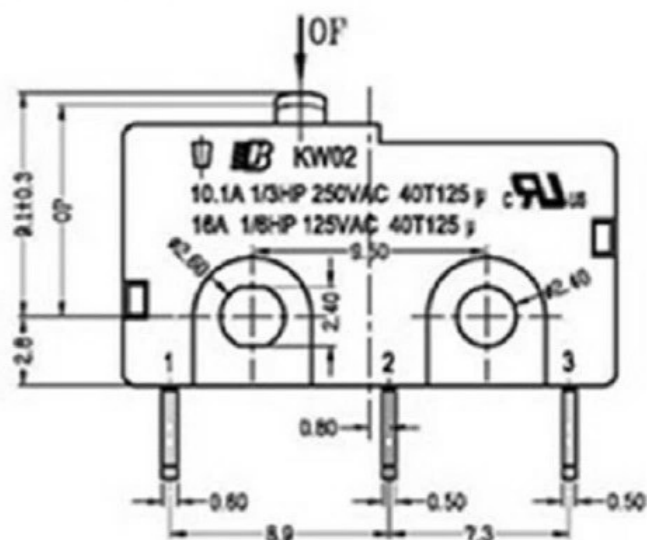

CHARACTERISITICS	
Operating Force:	250±50g.f
Release Force:	20g.f
Operation Position:	8.60±0.3mm
Pre Travel:	0.6mm max
Differential travel:	0.3mm max
Over Travel:	0.4mm min

1. FUNCTION: ON-(ON)
2. RATING: UL: 10.1A 1/3HP 250VAC 40T125 μ
16A 1/6HP 125VAC 40T125 μ
ENEC CQC CB: 10(6)A 250VAC 40T125 μ
3. CONTACT RESISTANCE: $\leq 50\text{m}\Omega$
4. INSULATION RESISTANCE: $\geq 100\text{ M}\Omega$
5. DIELECTRIC WITHSTAND: TERMINAL TO BUTTON 3000VAC/5mA/1MINUTE
TERMINAL TO TERMINAL 1000VAC/5mA/1MINUTE

8					TOLERANCE UNLESS SPECIFIED						
7											
6					WITHIN 1.5mm : ±0.1mm	A	2012-8-13	初 版			
5	SPRING	SUS	1	NATURAL	OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION		APPD.	
4	CAM STICK	SUS	1	NATURAL	TITLE : Miocro Switch			UNIT : mm	DRWG NO.:		
3	CASE	PA66/BRASS STRIP	1	GREY/Ag PLATED				MODEL:			SCALE: 5:1
2	COVER	PA66	1	BLACK	 广东科斯达开关厂						CHK'D
1	KNOB	PA66/PBS C5210R-EH	1	WHITE/Ag CLAD				 广东科斯达开关厂			APPD.
NO.	PARTS	MATERIALS	Q'TY								