

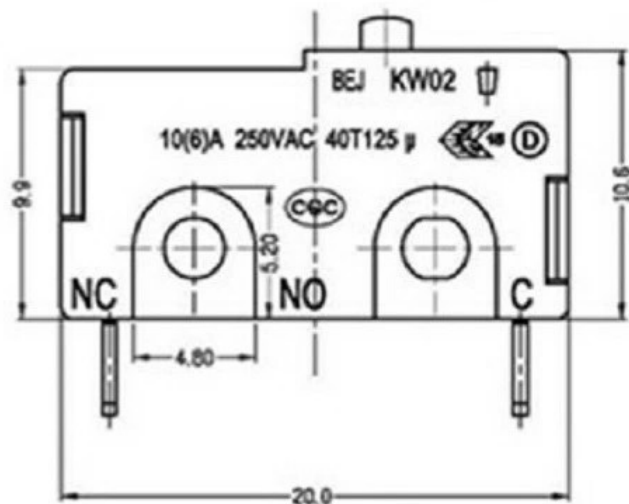
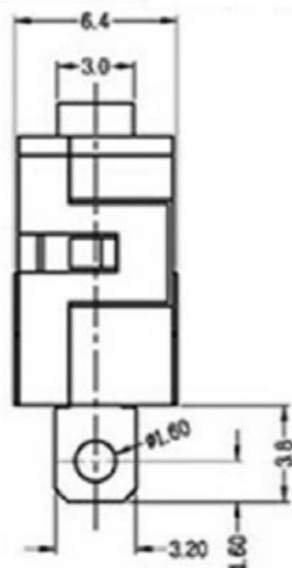






OF

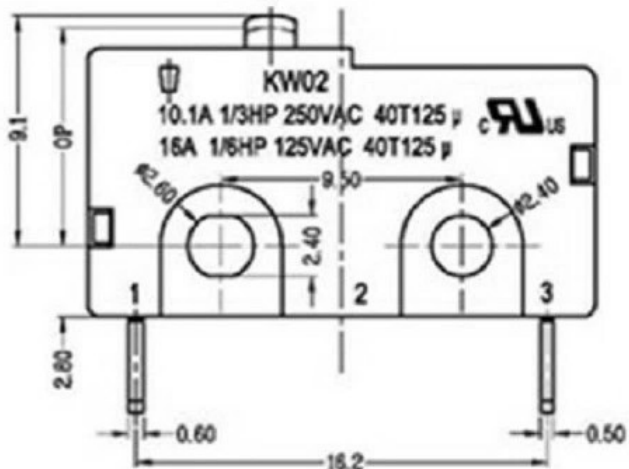

7. Mounting Holes

6. Circuit Diagram

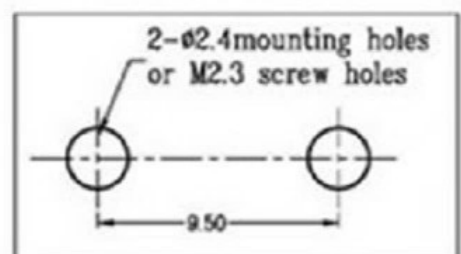

1. FUNCTION: ON-(OFF)
2. RATING: UL: 10.1A 1/3HP 250VAC 40T125 μ
16A 1/6HP 125VAC 40T125 μ
ENEC CQC CB: 10(6)A 250VAC 40T125 μ
3. CONTACT RESISTANCE: ≤ 50mΩ
4. INSULATION RESISTANCE: ≥ 100 MΩ
5. DIELECTRIC WITHSTAND: TERMINAL TO BUTTON 3000VAC/5mA/1MINUTE
TERMINAL TO TERMINAL 1000VAC/5mA/1MINUTE

CHARACTERISTICS	
Operating Force:	250±50g.f
Release Force:	20g.f
Operation Position:	8.60±0.3mm
Pre Travel:	0.6mm max
Differential travel:	0.3mm max
Over Travel:	0.4mm min

8					TOLERANCE				
7					UNLESS SPECIFIED				
6					WITHIN 1.5mm : ±0.1mm	A	2012-8-13	初版	
5	SPRING	SUS	1	NATURAL	OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
4	CAM STICK	SUS	1	NATURAL	TITLE : Micro Switch				UNIT : mm
3	CASE	PA66/BRASS STRIP	1	GREY/Ag PLATED	MODEL:				DRWG NO.:
2	COVER	PA66	1	BLACK					SCALE: 5:1
1	KNOB	PA66/PBS C5210R-EH	1	WHITE/Ag CLAD					DWN.
NO.	PARTS	MATERIALS	Q'TY						2012-8-13
									CHK'D
									2012-8-13
									APPD.



广东科斯达开关厂