


CAD FILE:

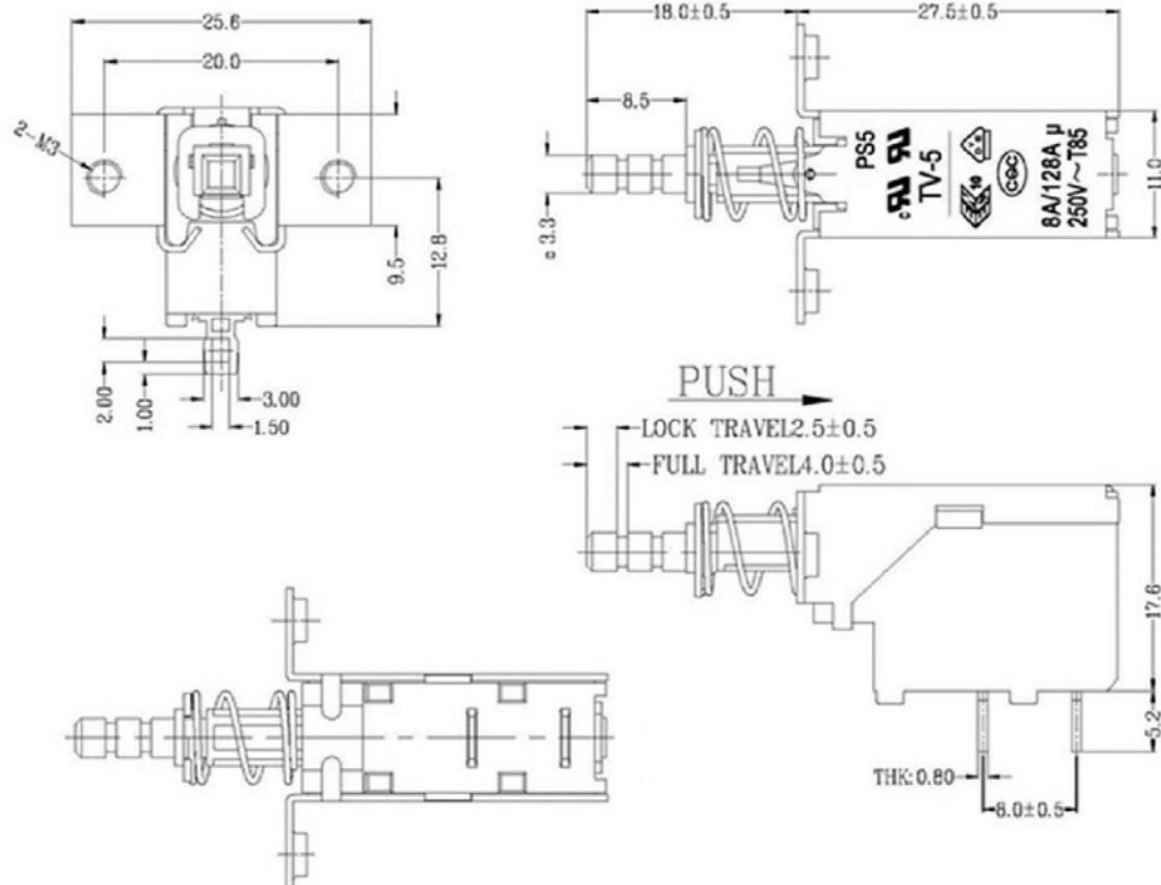


- 1、FUNCTION: OFF-ON
- 2、RATING: UL: TV-5
ENEC VDE/CQC: 8A/128A μ 250V~T85
- 3、OPERATION FORCE: 700 \pm 300g.f
- 4、CONTACT RESISTANCE: \leq 50 m Ω
- 5、INSULATION RESISTANCE: \geq 100 M Ω
- 6、DIELECTRIC WITHSTAND: TERMINAL TO BUTTON 3000VAC/5mA/1MINUTUE
TERMINAL TO TERMINAL 1500VAC/5mA/1MINUTUE

7、TRAVEL:

FULL TRAVEL	4.0 \pm 0.5mm
LOCK TRAVEL	2.5 \pm 0.5mm

8、CIRCUIT DIAGRAM:



注: "*"表示关键尺寸(6个)

NO.	PARTS	MATERIALS	Q'TY	FINISHING						
9	CONTACT CLIP	PBS C5210R-EH	1	Ag CLAD						
8	SPRING PLATE	PBS STRIP	1	Ni PLATED						
7	BASE	PHENOLIC RESIN	1	NATURAL						
6	TERMINAL	BRASS STRIP	3	Ag PLATED						
5	KNOB	PA66	1	BLUE						
4	BLOCK	STEEL STRIP	1	Ni PLATED						
3	SPRING	STEEL WIRE	1	Ni PLATED						
2	CAM STICK	PBS WIRE	1	Ni PLATED						
1	FRAME	STEEL STRIP	1	Ni PLATED						
					TOLERANCE UNLESS SPECIFIED					
					WITHIN 1.5mm : \pm 0.1mm	A	2012-8-22	初版		
					OVER 1.5mm : \pm 0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.	
					TITLE : PUSH SWITCH		UNIT : mm	DRWG NO.:		
					MODEL:		SCALE: 3:1	DWN.	2012-8-22	
					广东科斯达开关厂		CHK'D	2012-8-22		
							APPD.			