

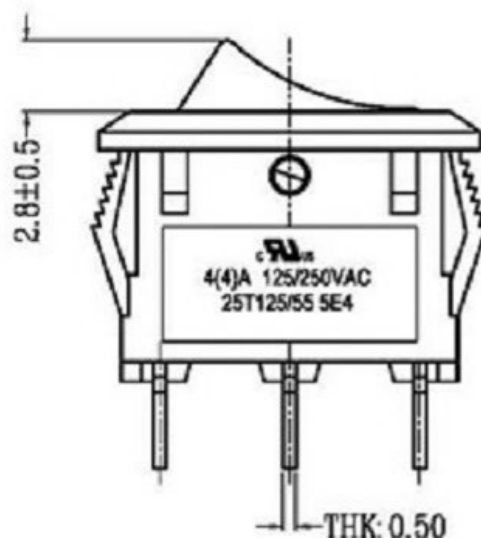
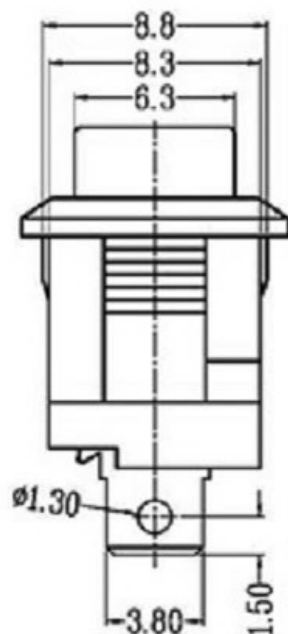
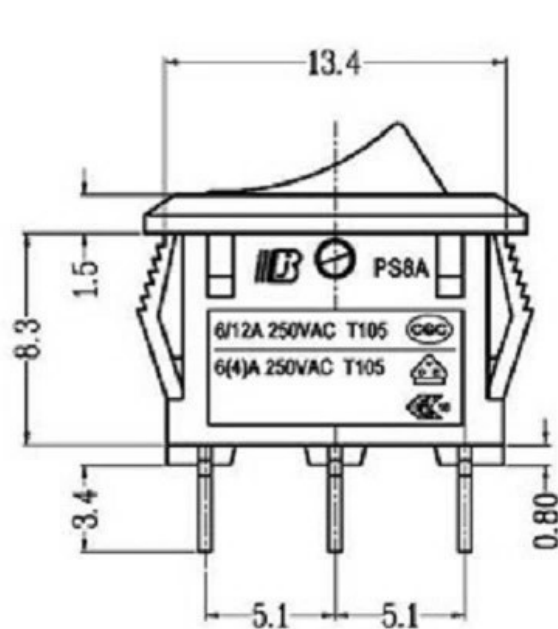


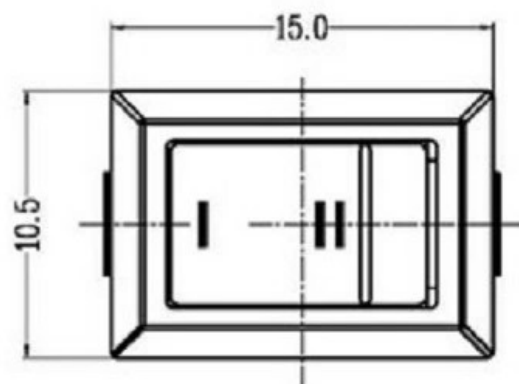

8. SUGGESTED PANEL HOLE SIZE

PANEL THICKNESS	DIM. X	DIM. Y
0.75-1.25	13.6/13.6	9.0
1.25-2.0	13.7/13.6	9.0
2.0-3.0	13.9/14.0	9.0

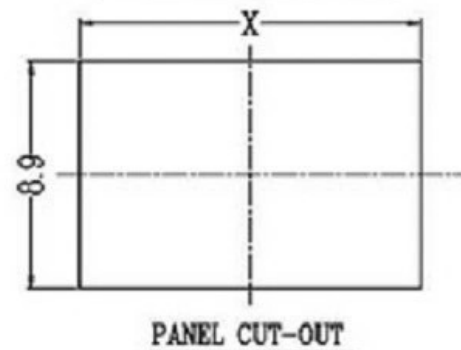

1、FUNCTION: OFF-ON

2、RATING: UL: 4(4)A 125/250VAC 25T125/55 5E4

ENEC VDE: 6(4)A 250VAC T105

CQC: 6/12A 250VAC T105


3、OPERATION FORCE: 700±400g.f

4、CONTACT RESISTANCE: ≤ 50 mΩ

5、INSULATION RESISTANCE ≥ 100 MΩ

6、DIELECTRIC WITHSTAND: TERMINAL TO BUTTON 3000VAC/10mA/1MINUTE
TERMINAL TO TERMINAL 1500VAC/10mA/1MINUTE

7、CIRCUIT DIAGRAM:

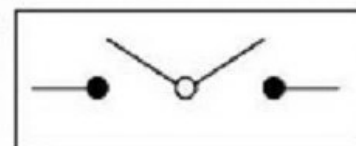

A4				普通公差:		 广东科斯达电子科技有限公司 Guang dong Keside Electronic Technology Co., Ltd.							
A3				COMMON TOLERANCE :									
A2				UP TO 5	±0.20	单 位 UNIT	mm	投 影 PROJECTED		品 名 PRODUCT NAME	跷板开关	比 例 SCALE	Free
A1				ABOVE 5 TO 30	±0.30	绘 图 DRAWN BY	周金勇	核 对 CHECKED BY	梁金勇	型 号 MODEL NO.			
				ABOVE 30	±0.50								
REV.	DATE	REVISION DESCRIPTION	ISSUE	ANGULAR	±5°	日 期 DATE	2015.8.17	核 准 APPROVAL BY	周培雷	图 号 DWG NO.	KSD-AC SWITCH		

KSD-AC SWITCH