
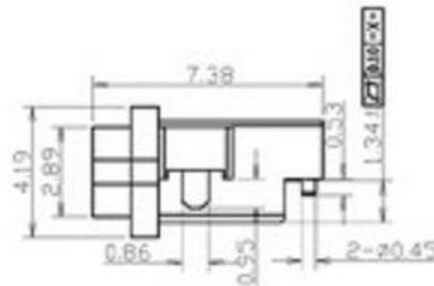
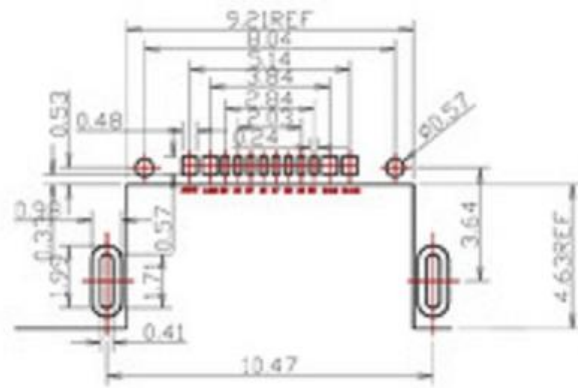


RoHS Compliant

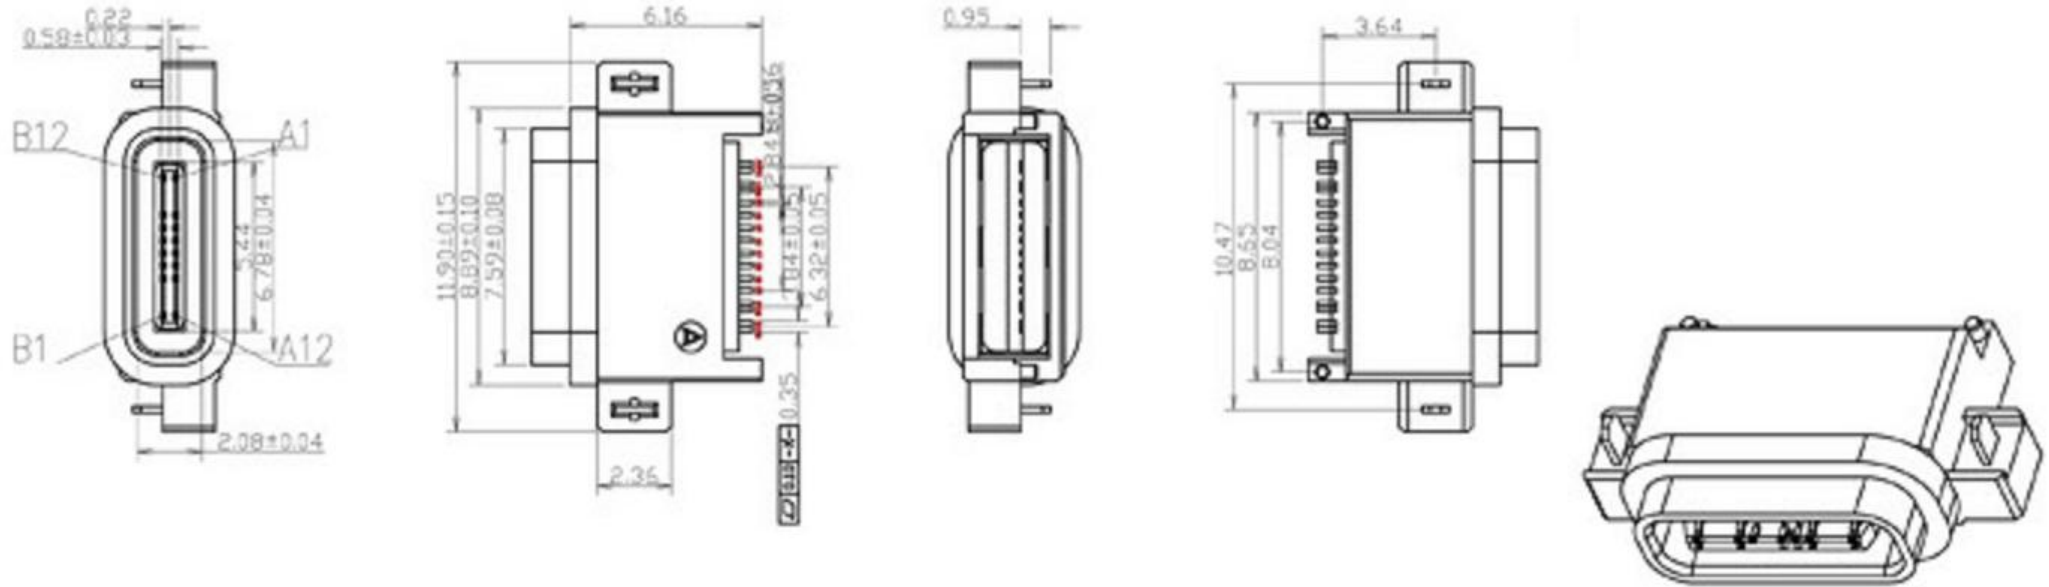

- NOTES:
 SPECIFICATION:
 1.CURRENT RATING: 3.0A MAX
 2.VOLTAGE: 100 VAC
 3.TEMPERATURE RANGE: -30°C~+85°C
 4.CONTACT RESISTANCE: 40 MILLIONHM MAX
 5.INSULATION RESISTANCE: 100 MEGOHMS MIN
 6.INSERTION FORCE: 5N-20N
 7.UNMATING FORCE: 8N-20N
 8.DURABILITY: 10000 CYCLES
 9.WATER PROOFNESS: THIS PRODUCT IS BASED ON IPX7.

⑤	MID PLATE	1	STAINLESS STEEL	Au . PLATING.	T=0.15mm
④	SHELL	1	STAINLESS STEEL	Au . PLATING.	T=0.30mm
③	TERMINAL-B	1	TABLE 2:	TABLE 2:	T=0.12mm
②	TERMINAL-A	1	TABLE 2:	TABLE 2:	T=0.12mm
①	INSULATOR	1	HIGH TEMP	Black	

NO.	PART NAME	QTY	MATERIAL	DESCRIPTION	REMARK
UNLESS OTHERWISE, GENERAL TOLERANCE: X.xxx ±0.10 X.xx ±0.20 X.x ±0.30 X. ±0.38 ANGULAR: X.xx ±1° X.x ±3° X. ±5°					
广东科斯达开关厂				P/N: Detail See PART NO. LIST	
TITLE: USB connector				MODEL:	
DRAW NO.:				SCALE: 1:1	
THIRD ANGLE PROJECTION				UNIT: mm	SHEET: 1/1

ECN NO.	REV.	DESCRIPTION	DATE	CHANGE	APPROVAL	DATE
JH2016-080	X2	随工程图上升版本次	2016.06.15	陈少兵	DESIGN	2016.06.15
JH2016-071	X1	新增规格	2016.06.10	陈少兵	CHECK	2016.06.15
20151224001	X	NEW DRAWING	2016.05.05	陈少兵	APPROVAL	2016.06.15