


REV	ECN NO	DESCRIPTION	DATE	NAME
A		NEW		

**SPECIFICATIONS**  
Rated Current: 3.0AMP  
Contact Resistance: 30mΩ Max  
Withstand Voltage: 1000V AC/DC  
Insulation Resistance: 1000MΩ Min  
Operation Temperature: -55°C to +105°C  
Contact Material: Brass  
Contact Plating: Au or Sn Over Ni  
Insulator Material: Polyester(UL94V-0)  
Standard: PBT

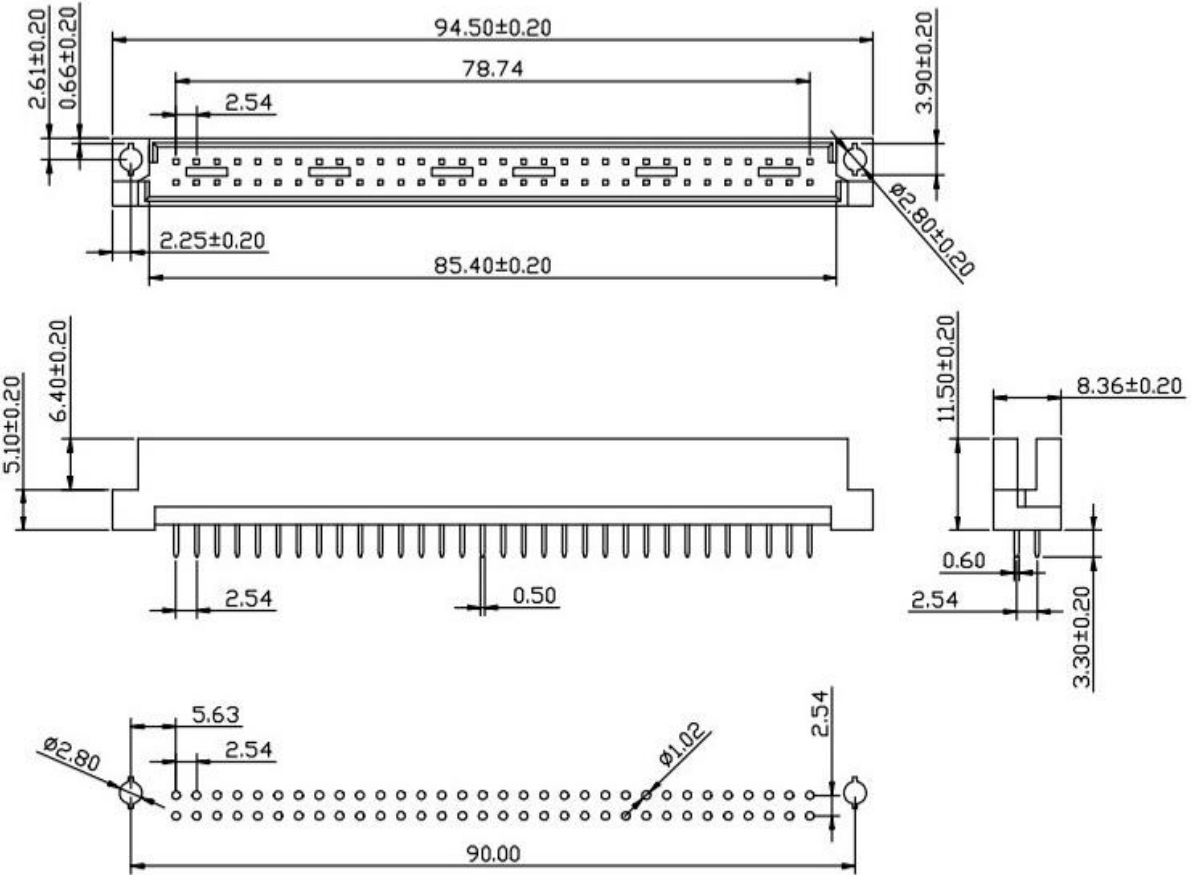

**NO. of Pins**  
Per Row:  
1-50P

**The product type**  
0, 180°  
1, 90°  
2, SMT  
9, Welding line

**Contact Plating**  
0, Au0.3u"  
1, Au1.0u"  
7, half gold half tin plating  
8, Bright tin plating

**Serial NO.**  
01-99

**Packing**  
A=PE Bag  
B=Tube  
C=Tray  
D=Reel

**P.C.B LAYOUT**

**科斯達電子科技有限公司**

STANDARD TOLERANCE (EXCEPT SPECIFIED)	
LINER	ANGLES
.0 ±0.30	0.° ±3°
.00 ±0.20	.0° ±2°
.000 ±0.10	.00° ±1°

TITLE		PDR. 94mm-J BSH 41629 Hole Real-view Straight Type		DRAWN BY		Lujunhui		18.10.30	
PART NO				CHECKED BY					
DRAWING NO				APPROVED BY					
SCALE	1:1	UNIT	mm		PAGE	1/1	SIZE	A4	