
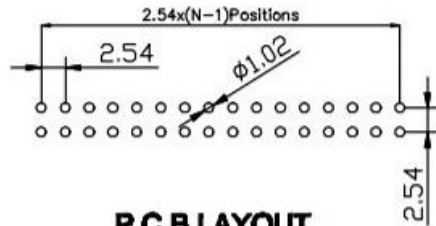
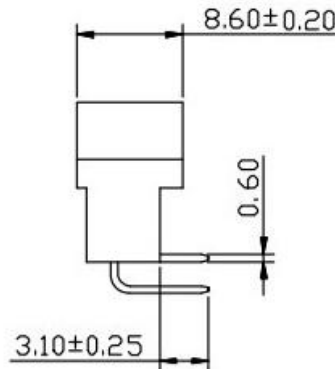
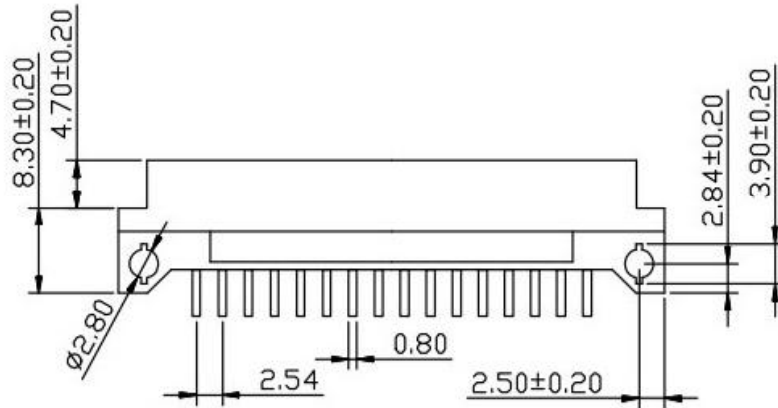



REV	ECN NO	DESCRIPTION	DATE	NAME
A		NEW		

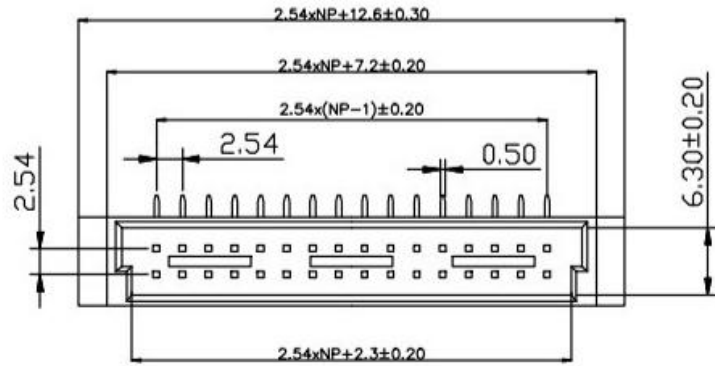

P.C.B LAYOUT

**SPECIFICATIONS**  
 Rated Current: 3.0AMP  
 Contact Resistance: 30mΩ Max  
 Withstand Voltage: 1000V AC/DC  
 Insulation Resistance: 1000MΩ Min  
 Operation Temperature: -55°c to +105°c  
 Contact Material: Brass  
 Contact Plating: Au or Sn Over Ni  
 Insulator Material: Polyester(UL94V-0)  
 Standard: PBT

### Ordering Information

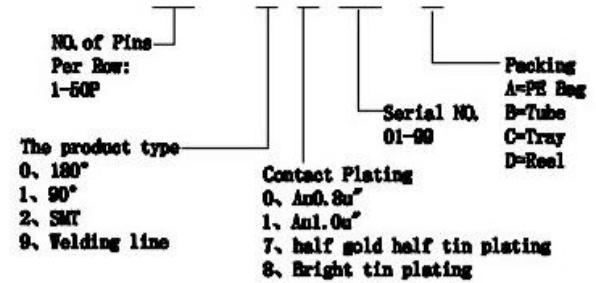

# 广东科斯达开关厂

**STANDARD TOLERANCE  
(EXCEPT SPECIFIED)**

LINER		ANGLES	
.0	±0.30	0.°	±3°
.00	±0.20	.0°	±2°
.000	±0.10	.00°	±1°

TITLE	PRE-STAR-J MINI 4000 Series Half-size Right Angle Type	DRAWN BY	YTT	18.06.20
PART NO		CHECKED BY		
DRAWING NO		APPROVED BY		
SCALE	1:1	UNIT	mm	
PAGE	1/1	SIZE	A4	