





REV	BCN NO	DESCRIPTION	DATE	NAME
A		NEW		

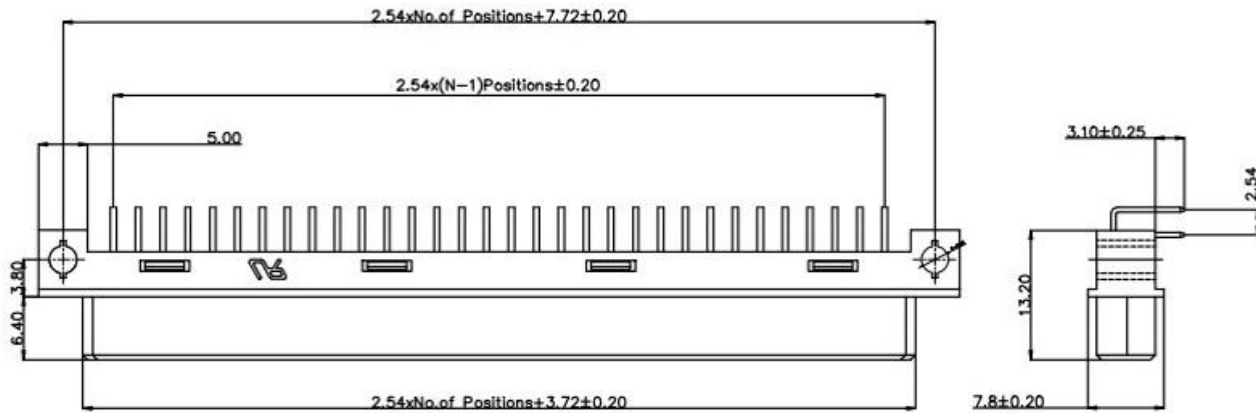

### SPECIFICATIONS

Rated Current: 3.0AMP  
 Contact Resistance: 30mΩ Max  
 Withstand Voltage: 1000V AC/DC  
 Insulation Resistance: 1000MΩ Min  
 Operation Temperature: -55°C to +105°C  
 Contact Material: Brass  
 Contact Plating: Au or Sn Over Ni  
 Insulator Material: Polyester(UL94V-0)  
 Standard: PBT

### Ordering Information

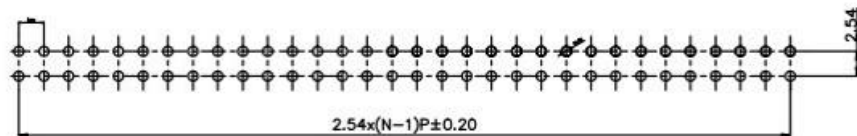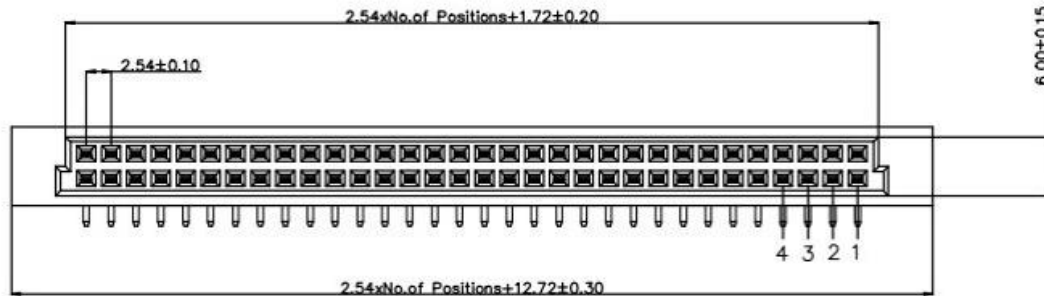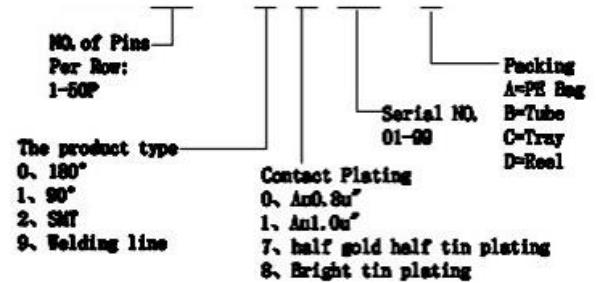

### P.C.B LAYOUT

STANDARD TOLERANCE (EXCEPT SPECIFIED)			
LINER		ANGLES	
.0	±0.30	0.°	±3°
.00	±0.20	.0°	±2°
.000	±0.10	.00°	±1°

# 广东科斯达开关厂

TITLE	Pin 50mm J. REV 4MMR Female Dual-row Right Angle Type	DRAWN BY	Lujunhui	18. 10. 30
PART NO		CHECKED BY		
DRAWING NO		APPROVED BY		
SCALE	1:1	UNIT	mm	PAGE 1/1
				SIZE A4