

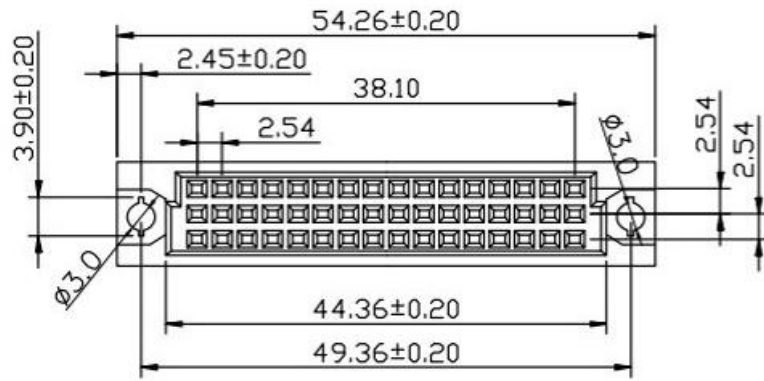


REV	BCN NO	DESCRIPTION	DATE	NAME
A		NEW		


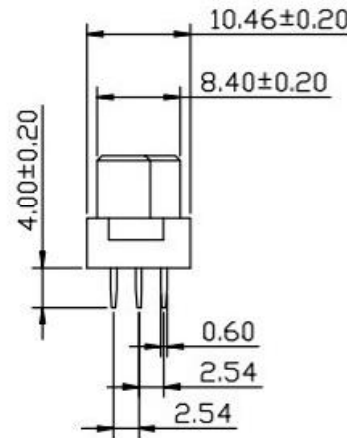


**SPECIFICATIONS**

Rated Current: 3.0AMP  
 Contact Resistance: 30mΩ Max  
 Withstand Voltage: 1000V AC/DC  
 Insulation Resistance: 1000MΩ Min  
 Operation Temperature: -55°C to +105°C  
 Contact Material: Brass  
 Contact Plating: Au or Sn Over Ni  
 Insulator Material: Polyester (UL94V-0)  
 Standard: PBT

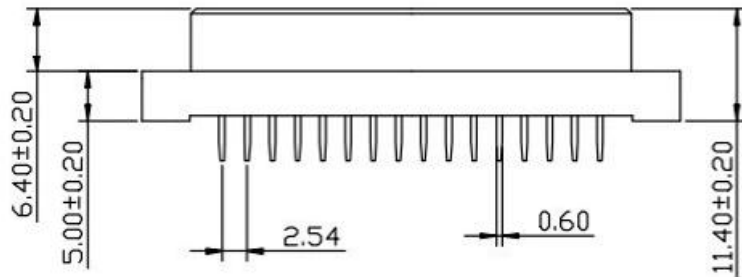

**Ordering Information**

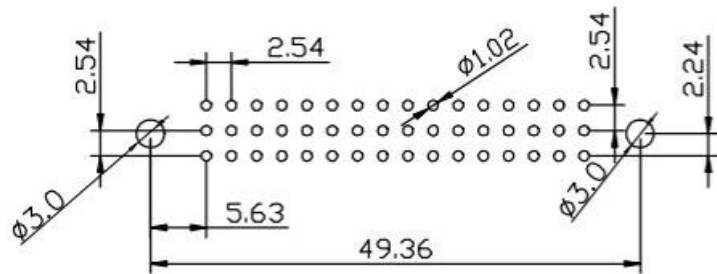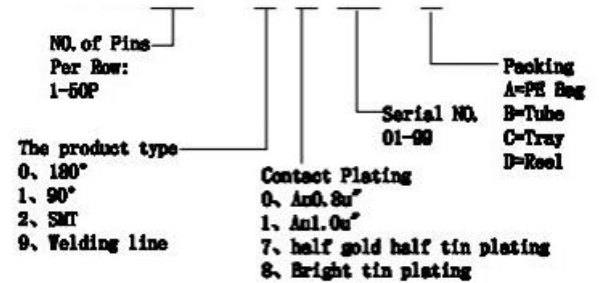

**P.C.B LAYOUT**

**广东科斯达开关厂**

STANDARD TOLERANCE (EXCEPT SPECIFIED)			
LINER		ANGLES	
.0	±0.30	0.°	±3°
.00	±0.20	.0°	±2°
.000	±0.10	.00°	±1°

TITLE		DRAWN BY		DATE	
PBL 5mm-J DIN 41612 Female Three row straight type		Lujunhui		18.10.30	
PART NO		CHECKED BY			
DRAWING NO		APPROVED BY			
SCALE	UNIT	PAGE	SIZE		
1:1	mm	1/1	A4		