

RoHS

REV	ECN NO	DESCRIPTION	DATE	NAME
A		NEW		





Specifications

- 1.Current Rating:1Amps
- 2.Contact Resistance: 20mΩ
- 3.Insulator Resistance:1000 Megohms min.
- 4.Dielectric withstanding Voltage: AC/DC 500V
- 5.Operating Temperature:-40℃ to+105℃
- 6.Contact Material: phosphor Bronze
- 7.Insulator Material:Asfollows
- 8.Plated: Asfollows

Ordering Information

Insulation Height*Wide (H*W)	NO. of Pins Per Row:	Insulation Material	Contact Plating	Serial NO.	Packing
Option:	1-50P	Option:		01-69(No pillars)	A=PE Bag
20=2.0*3.0		1=PBT	0=0.8" Gold	70-89(pillars)	B=Tube
34=3.4*3.0		2=PPS	1=Au1" Gold	90-99(outside pillars)	C=Tray
43=4.3*3.0		3=NY6T	2=Au1.5" Gold		D=Reel
		4=LCP	3=Au2" Gold		
		5=NY66	4=Au3" Gold		
		6=Customized	5=Au5" Gold		
		7=NY46	6=Customized		
		8=NY9T	7=Gold/Tin		
			8=Tin		

Dimension antitheses list			
ITEM	PC	H	W
Standard	4.2/4.8/5.0	2.0/3.4/4.3	3.0
Alternate			

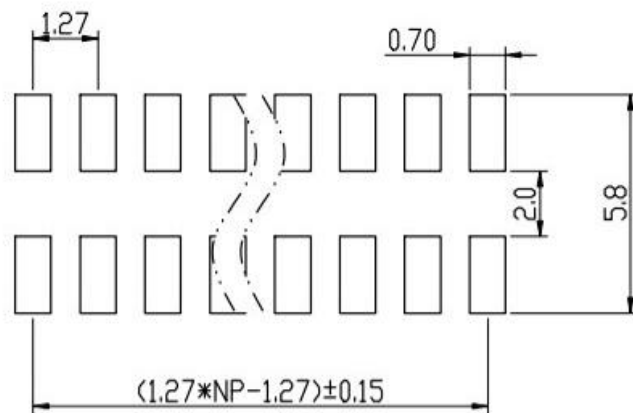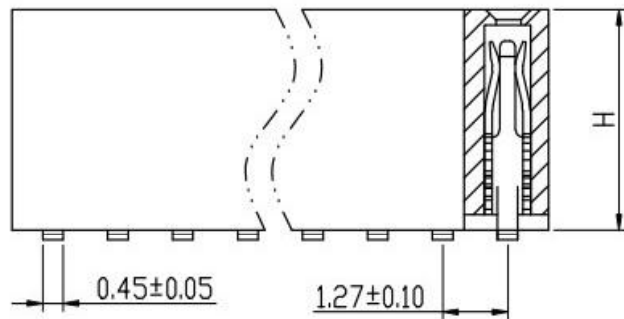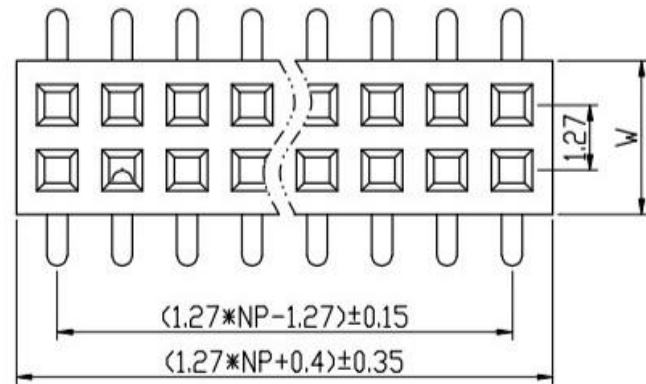

PCB LAYOUT

STANDARD TOLERANCE (EXCEPT SPECIFIED)			
LINER		ANGLES	
.0	±0.30	0.°	±3°
.00	±0.20	.0°	±2°
.000	±0.10	.00°	±1°

广东科斯达开关厂

TITLE	PH1.27mm 2XNP SMT Dual row Female Header	DRAWN BY	Lujunhui	18.04.01
PART NO		CHECKED BY		
DRAWING NO		APPROVED BY		
SCALE	1:1	UNIT	mm	PAGE 1/1
		SIZE	A4	