

RoHS

REV	ECN NO	DESCRIPTION	DATE	NAME
A		NEW		

- Specifications
- 1.Current Rating:1Amps
 - 2.Contact Resistance: 20mΩ
 - 3.Insulator Resistance:1000 Megohms min.
 - 4.Dielectric withstanding Voltage: AC/DC 500V
 - 5.Operating Temperature:-40℃ to+105℃
 - 6.Contact Material: phosphor Bronze
 - 7.Insulator Material:Asfollows
 - 8.Plated: Asfollows

Ordering Information

Insulation Height*Wide (H*W)	NO. of Pins Per Row: 1-50P	Insulation Material Option:	Contact Plating	Serial NO. 01-69(No pillars) 70-89(pillars) 90-99(outside pillars)	Packing A=PE Bag B=Tube C=Tray D=Reel
20=2.0*3.0		1=PBT	0=0.8" Gold		
34=3.4*3.0		2=PPS	1=Au1" Gold		
43=4.3*3.0		3=NY6T	2=Au1.5" Gold		
		4=LCP	3=Au2" Gold		
		5=NY66	4=Au3" Gold		
		6=Customized	5=Au5" Gold		
		7=NY46	6=Customized		
		8=NY9T	7=Gold/Tin		
			8=Tin		





Dimension antitheses list

ITEM	PC	H	W
Standard	1.8/2.4/3.0	2.0/3.4/4.3	3.0
Alternate			

广东科斯达开关厂

TITLE	PH1.27mm 2XNP 180° Dual row Female Header	DRAWN BY	Lujunhui	18.03.30
PART NO		CHECKED BY		
DRAWING NO		APPROVED BY		
SCALE	1:1	UNIT	mm	PAGE 1/1
				SIZE A4

STANDARD TOLERANCE (EXCEPT SPECIFIED)	
LINER	ANGLES
.0 ±0.30	0.° ±3°
.00 ±0.20	.0° ±2°
.000 ±0.10	.00° ±1°

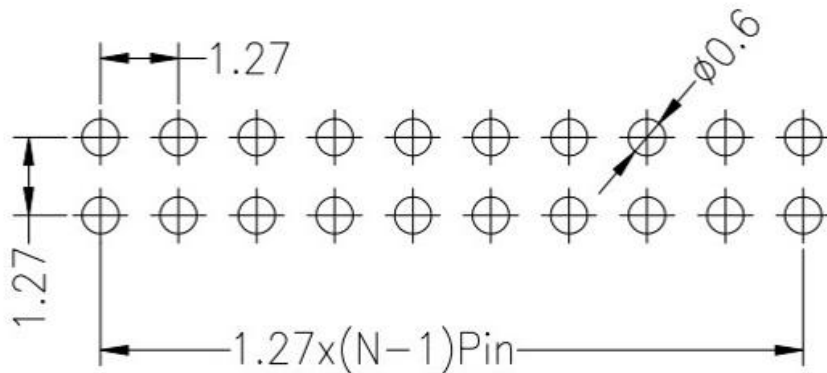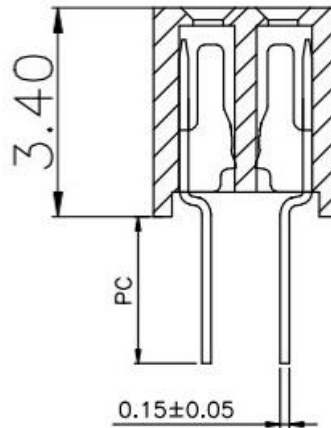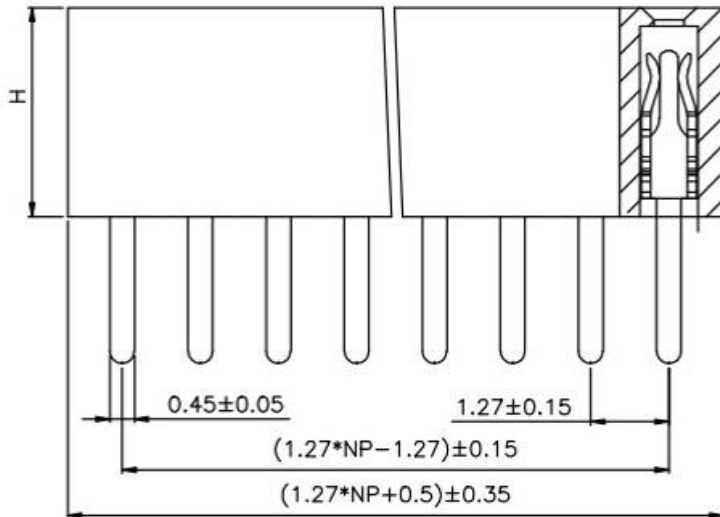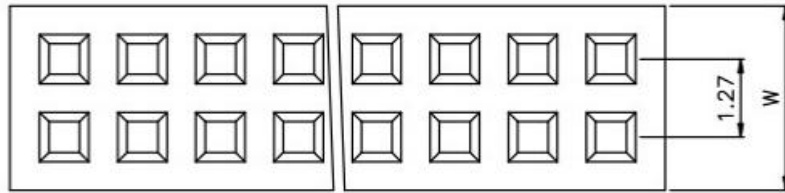

PCB LAYOUT