


RoHS


REV	BCN NO	DESCRIPTION	DATE	NAME
A		NEW		

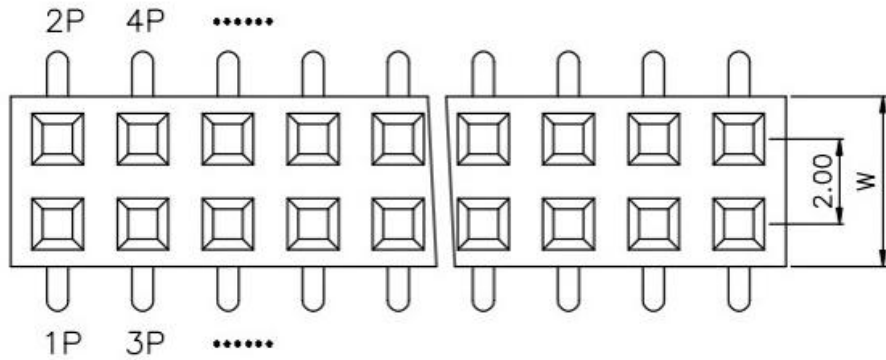

Specifications


1. Current Rating: 2Amps
2. Contact Resistance: 20mΩ
3. Insulator Resistance: 1000 Megohms min.
4. Dielectric withstanding Voltage: AC/DC 500V
5. Operating Temperature: -40°C to +105°C
6. Contact Material: phosphor Bronze
7. Insulator Material: As follows
8. Plated: As follows

Ordering Information

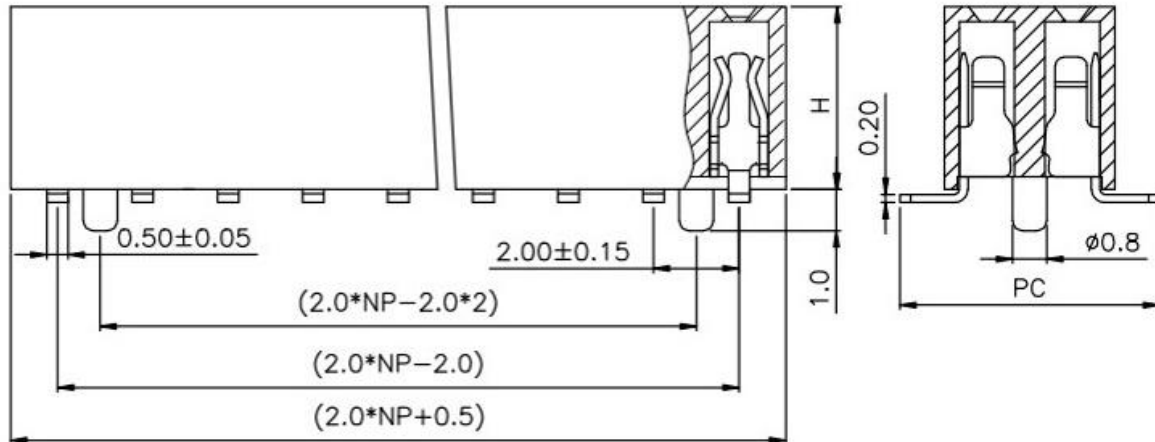

Insulation Height*Wide (H*W)	NO. of Pins Per Row:	Insulation Material Option:	Contact Plating	Serial NO.	Packing
Option: 22=2.2*4.0 40=4.0*W 43=4.3*W 46=4.6*W	1-40P	1=PBT 2=PFS 3=NY6T 4=LCP 5=NY66 6=Customized 7=NY46 8=NY9T	0=0.8" Gold 1=Au1" Gold 2=Au1.5" Gold 3=Au2" Gold 4=Au3" Gold 5=Au5" Gold 6=Customized 7=Gold/Tin 8=Tin	01-09 (No pillars) 70-89 (pillars) 90-99 (outside pillars)	A=PE Bag B=Tube C=Tray D=Reel

Dimension antitheses list			
ITEM	PC	H	W
Standard	6.1	2.2/4.0/4.3/4.6	4.0/4.5
Alternate			

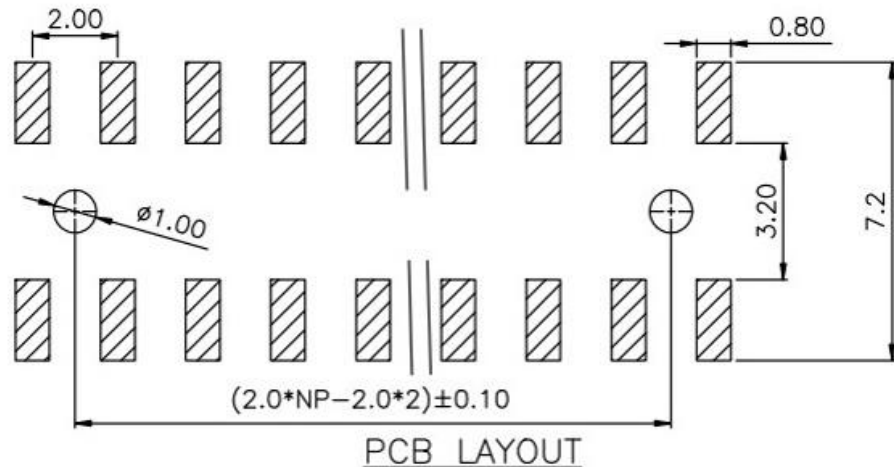

STANDARD TOLERANCE (EXCEPT SPECIFIED)			
LINER	ANGLES		
.0	±0.30	0.°	±3°
.00	±0.20	.0°	±2°
.000	±0.10	.00°	±1°

广东科斯达开关厂

TITLE	PH2.0mm 2XNP SMT Dual row Female Header With Post	DRAWN BY	Lu junhui	18.04.01			
PART NO		CHECKED BY					
DRAWING NO		APPROVED BY					
SCALE	1:1	UNIT	mm	PAGE	1/1	SIZE	A4