

RoHS

REV	ECN NO	DESCRIPTION	DATE	NAME
A		NEW		



Specifications

- 1.Current Rating:1Amps
- 2.Contact Resistance: 20mΩ
- 3.Insulator Resistance:1000 Megohms min.
- 4.Dielectric withstanding Voltage: AC/DC 500V
- 5.Operating Temperature:-40℃ to+105℃
- 6.Contact Material: phosphor Bronze
- 7.Insulator Material:Asfollows
- 8.Plated: Asfollows


Ordering Information

Insulation Height*Wide (H*W)	NO. of Pins Per Row:	Insulation Material	Contact Plating	Serial NO.	Packing
Option: 43=4.3*3.0	1-50P	Option: 1-PBT 2-PPS 3-NY6T 4-LCP 5-NY66 6-Customized 7-NY46 8-NY9T	0-0.8" Gold 1-Au1" Gold 2-Au1.5" Gold 3-Au2" Gold 4-Au3" Gold 5-Au5" Gold 6-Customized 7-Gold/Tin 8-Tin	01-69(No pillars) 70-89(pillars) 90-99(outside pillars)	A-PE Bag B-Tube C-Tray D-Reel

Dimension antitheses list			
ITEM	PC	H	H1
Standard	2.1/2.6	4.3	5.9
Alternate			

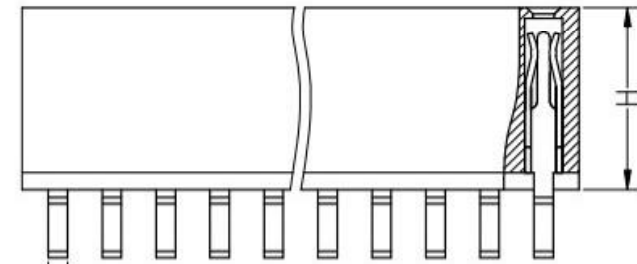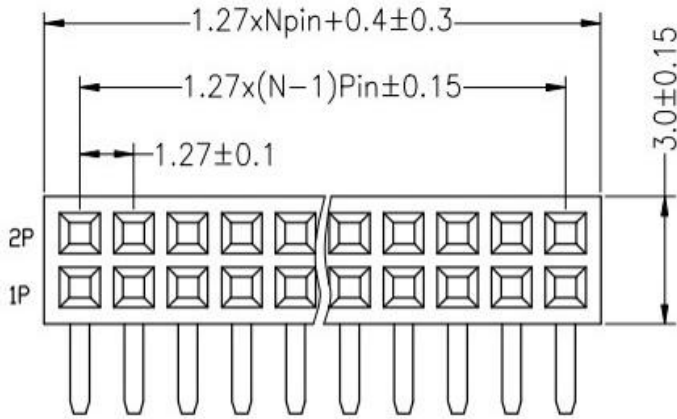

PIN 0.45±0.05

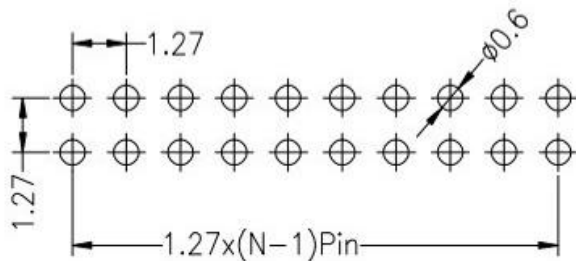

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

STANDARD TOLERANCE (EXCEPT SPECIFIED)			
LINER		ANGLES	
.0	±0.30	0.°	±3°
.00	±0.20	.0°	±2°
.000	±0.10	.00°	±1°

广东科斯达开关厂

TITLE	PH1.27mm 2XNP 90° Dual row Female Header	DRAWN BY	Lu junhui	18.03.30
PART NO		CHECKED BY		
DRAWING NO		APPROVED BY		
SCALE	1:1	UNIT	mm	PAGE 1/1
				SIZE A4