

RoHS

REV	ECN NO	DESCRIPTION	DATE	NAME
A		NEW		




Specifications

- 1.Current Rating:1Amps
- 2.Contact Resistance: 20mΩ
- 3.Insulator Resistance:1000 Megohms min.
- 4.Dielectric withstanding Voltage: AC/DC 500V
- 5.Operating Temperature:-40℃ to +105℃
- 6.Contact Material: phosphor Bronze
- 7.Insulator Material:Asfollows
- 8.Plated: Asfollows

Ordering Information

Insulation Height*Wide (H*W)	NO. of Pins Per Row: 1-50P	Insulation Material Option:	Contact Plating	Serial NO	Packing
20=2.0*2.0		1-PBT	0=0.8" Gold	01-99(No pillars)	A=PE Bag
34=3.4*1.8		2-PPS	1=Au1" Gold	70-89(pillars)	B=Tube
43=4.3*1.8		3-NY67	2=Au1.5" Gold	90-99(outside pillars)	C=Tray
		4-LCP	3=Au2" Gold		D=Reel
		5-NY66	4=Au3" Gold		
		6-Customized	5=Au5" Gold		
		7-NY46	6-Customized		
		8-NY97	7-Gold/Tin		
			8-Tin		

Dimension antitheses list			
ITEM	PC	H	W
Standard	1.8/2.4	2.0/3.4/4.3	1.8
Alternate			

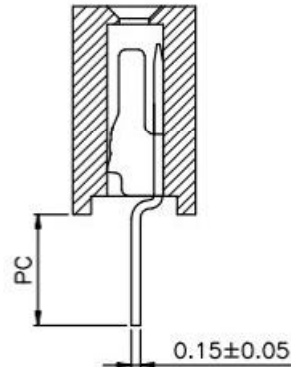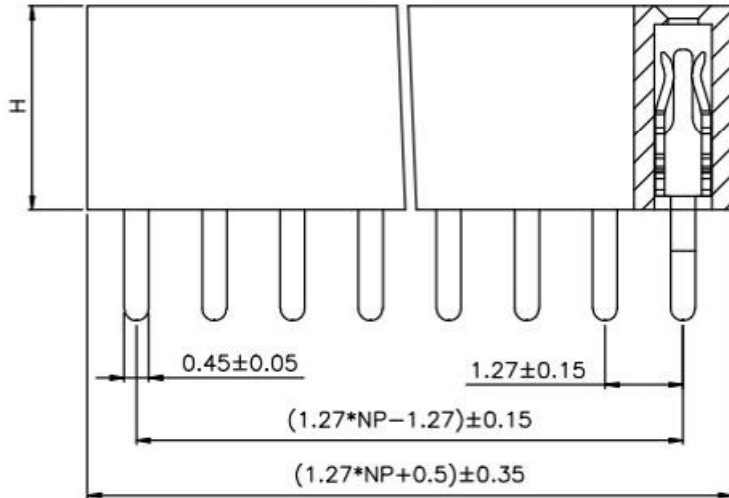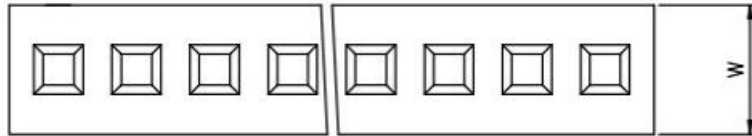

PCB LAYOUT

STANDARD TOLERANCE (EXCEPT SPECIFIED)			
LINER		ANGLES	
.0	±0.30	0.°	±3°
.00	±0.20	.0°	±2°
.000	±0.10	.00°	±1°

广东科斯达开关厂

TITLE	PH1.27mm H3.4mm 1XNP180 Single row Female Header	DRAWN BY	Lu junhui	18.03.30
PART NO		CHECKED BY		
DRAWING NO		APPROVED BY		
SCALE	1:1	UNIT	mm	PAGE 1/1 SIZE A4