


PIN 0.4*0.4

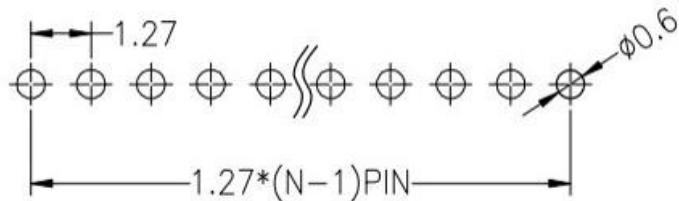

PCB LAYOUT

RoHS


REV	ECN NO	DESCRIPTION	DATE	NAME
A		NEW		

Specifications

- 1.Current Rating:1Amps
- 2.Contact Resistance: 20mΩ
- 3.Insulator Resistance:1000 Megohms min.
- 4.Dielectric withstanding Voltage: AC/DC 500V
- 5.Operating Temperature:-40℃ to+105℃
- 6.Contact Material: phosphor Bronze
- 7.Insulator Material:Asfollows
- 8.Plated: Asfollows

Ordering Information

Insulation Height*Wide (H*W)	NO. of Pins Per Row: 1-50P	Insulation Material Option:	Contact Plating	Serial NO.	Packing
85-8.5*2.5		1-PBT 2-PPS 3-NY67 4-LCP 5-NY66 6-Customized 7-NY46 8-NY9T	0-0.8" Gold 1-Au1" Gold 2-Au1.5" Gold 3-Au2" Gold 4-Au3" Gold 5-Au5" Gold 6-Customized 7-Gold/Tin 8-Tin	01-99(No pillars) 70-99(pillars) 90-99(outside pillars)	A=PE Bag B=Tube C=Tray D=Reel

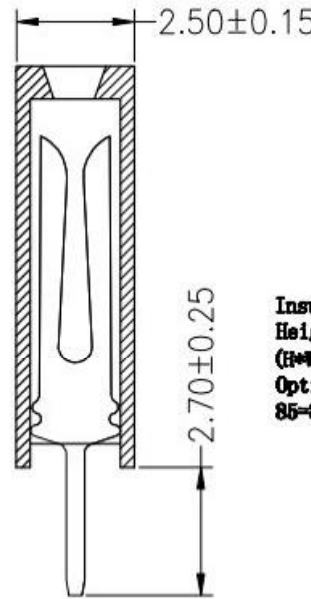

广东科斯达开关厂

STANDARD TOLERANCE (EXCEPT SPECIFIED)			
LINER		ANGLES	
.0	±0.30	0.°	±3°
.00	±0.20	.0°	±2°
.000	±0.10	.00°	±1°

TITLE	PH1.27mm 1XNP 180° Single row Female Header Y Type	DRAWN BY	Lujunhui	18.03.30
PART NO		CHECKED BY		
DRAWING NO		APPROVED BY		
SCALE	1:1	UNIT	mm	PAGE 1/1
		SIZE	A4	