
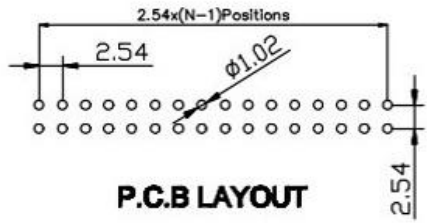
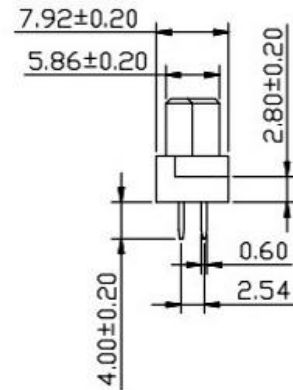
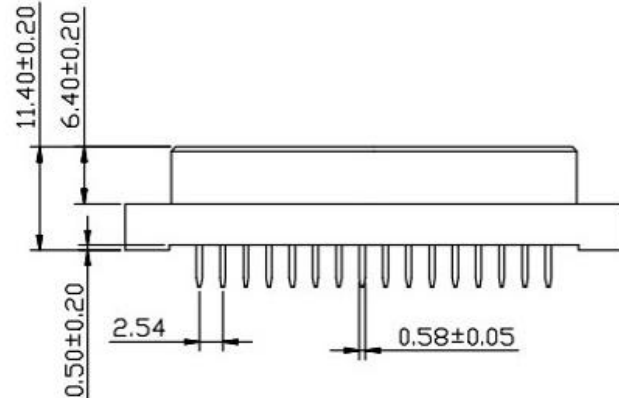



| REV | ECN NO | DESCRIPTION | DATE | NAME |
|-----|--------|-------------|------|------|
| A | | NEW | | |

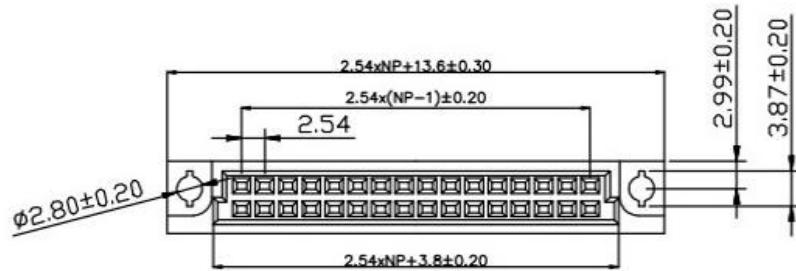

SPECIFICATIONS

Rated Current: 3.0AMP
 Contact Resistance: 30mΩ Max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -55°C to +105°C
 Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: Polyester(UL94V-0)
 Standard: PBT

Ordering Information

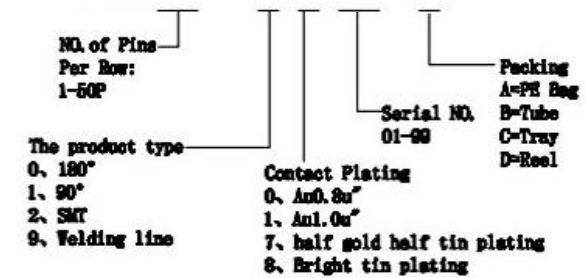

广东科斯达开关厂

| STANDARD TOLERANCE (EXCEPT SPECIFIED) | | | |
|---------------------------------------|-------|--------|-----|
| LINER | | ANGLES | |
| .0 | ±0.30 | 0.° | ±3° |
| .00 | ±0.20 | .0° | ±2° |
| .000 | ±0.10 | .00° | ±1° |

| | | | | | | |
|------------|-----|--|----|-------------|-----|----------|
| TITLE | | PBT 5mm DII 4M12 Female Real-ear Straight Type | | DRAWN BY | YTT | 18.06.20 |
| PART NO | | | | CHECKED BY | | |
| DRAWING NO | | | | APPROVED BY | | |
| SCALE | 1:1 | UNIT | mm | PAGE | 1/1 | SIZE A4 |