

RoHS

REV	ECN NO	DESCRIPTION	DATE	NAME
A		NEW		





Specifications

- 1.Current Rating:1Amps
- 2.Contact Resistance: 20mΩ
- 3.Insulator Resistance:1000 Megohms min.
- 4.Dielectric withstanding Voltage: AC/DC 500V
- 5.Operating Temperature:-40℃ to+105℃
- 6.Contact Material: phosphor Bronze
- 7.Insulator Material:Asfollows
- 8.Plated: Asfollows

Ordering Information

Insulation Height*Wide (H*W)	NO. of Pins Per Row: 1-50P	Insulation Material Option:	Contact Plating	Serial NO. 01-69(No pillars) 70-89(pillars) 90-99(outside pillars)	Packing A=PE Bag B=Tube C=Tray D=Reel
20=2.0*2.0		1=PBT	0=0.8" Gold		
34=3.4*1.8		2=PFS	1=Au1" Gold		
43=4.3*1.8		3=NY6T	2=Au1.5" Gold		
		4=LCP	3=Au2" Gold		
		5=NY66	4=Au3" Gold		
		6=Customized	5=Au5" Gold		
		7=NY46	6=Customized		
		8=NY9T	7=Gold/Tin		
			8=Tin		

Dimension antitheses list			
ITEM	PC	H	W
Standard	2.8/3.5	2.0/3.4/4.3	1.8
Alternate			

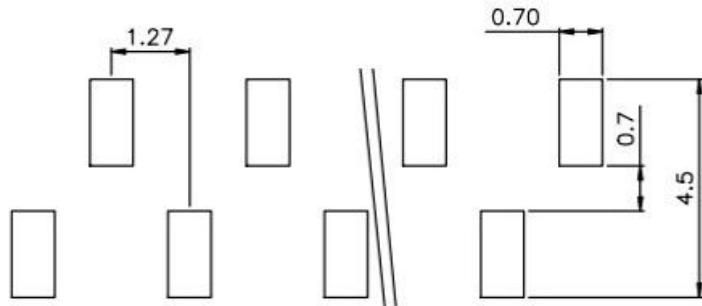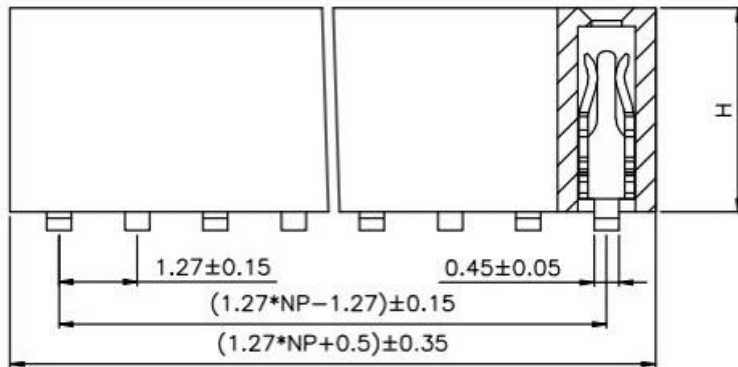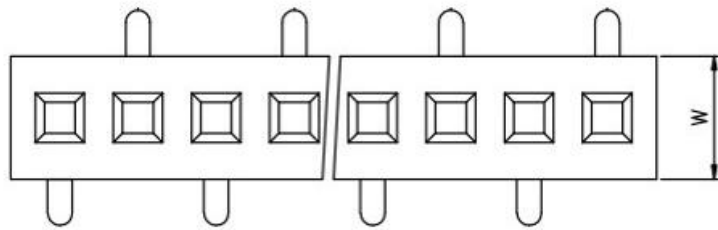

PCB LAYOUT

广东科斯达开关厂

STANDARD TOLERANCE (EXCEPT SPECIFIED)

LINER	ANGLES
.0 ±0.30	0.° ±3°
.00 ±0.20	.0° ±2°
.000 ±0.10	.00° ±1°

TITLE	PH1.27mm 1XNP SMT Single row Female Header	DRAWN BY	Lujunhui	18.03.30			
PART NO		CHECKED BY					
DRAWING NO		APPROVED BY					
SCALE	1:1	UNIT	mm	PAGE	1/1	SIZE	A4