

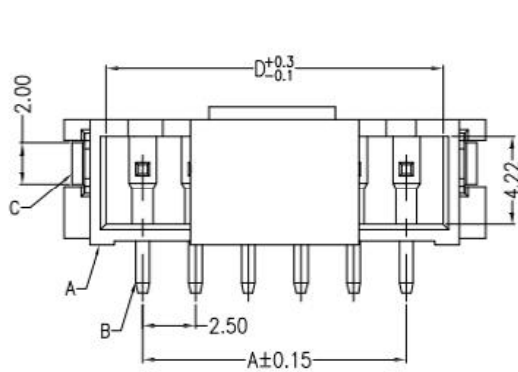




# RoHS

REV	ECN NO	DESCRIPTION	DATE	NAME
A	—	NEW	11/23-'19	LZM

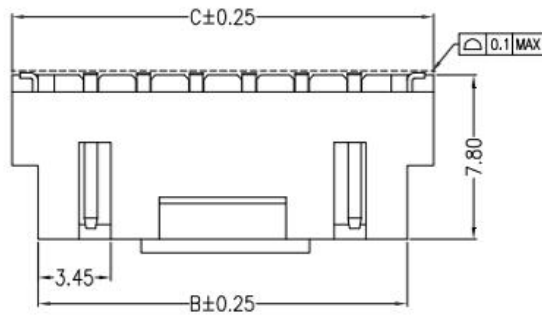


Assembly Layout

## 主要技术参数 Main Specifications

- 线数 (Poles) :02 to 16
- 接触电阻 (Contact resistance): $\leq 20m\ \Omega$
- 绝缘电阻 (Insulation resistance): $\geq 1000M\ \Omega$
- 额定电压 (Rated voltage):250V AC DC
- 额定电流 (Rated current):3.0A AC DC
- 耐电压 (Withstand Voltage):1000V AC/minute
- 温度范围 (Temperature Range):-25°C~+105°C

Circuit	Dimensions(mm)			
	A	B	C	D
02	2.50	7.50	10.00	6.00
03	5.00	10.00	12.50	8.50
04	7.50	12.50	15.00	11.00
05	10.00	15.00	17.50	13.50
06	12.50	17.50	20.00	16.00
07	15.00	20.00	22.50	18.50
08	17.50	22.50	25.00	21.00
09	20.00	25.00	27.50	23.50
10	22.50	27.50	30.00	26.00
11	25.00	30.00	32.50	28.50
12	27.50	32.50	35.00	31.00
13	30.00	35.00	37.50	33.50
14	32.50	37.50	40.00	36.00
15	35.00	40.00	42.50	38.50
16	37.50	42.50	45.00	41.00

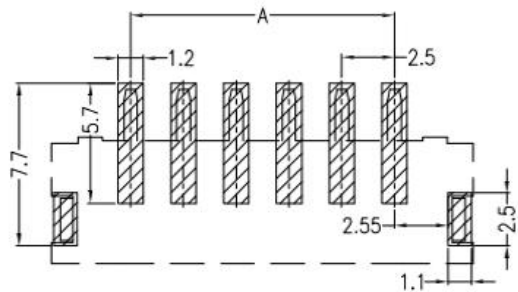

SUGGESTED PCB LAYOUT

## ORDER INFORMATION:

PART No.	_____	SPECIAL CODE:	_____
No. OF CIRCUITS:	02 16	X=CAP	_____
PLASTIC MATERIAL:	F1C=LCP(BEIGE)	PACKAGING:	R=REEL
		G=TUBE	_____
		P=PB	_____
		PLATING:	A=Sn
			_____

# 广东科斯达开关厂

ITEM	COMPONENT	Q'TY	MATERIAL	FINISH
C	Solder Tab	2 PCS	PhosphorBronze	Sn-plated
B	CONTACT	1~16 PCS	Brass	Sn-plated
A	HOUSING	1 PCS	LCP	UL 94V-0, COLOR:BEIGE

STANDARD TOLERANCE (EXCEPT SPECIFIED)	
LINER	ANGLES
.0 ±0.30	0.° ±3°
.00 ±0.20	.0° ±2°
.000 ±0.10	.00° ±1°

TITLE	2.5mm PITCH 180° WAFER SMT TYPE	DRAWN BY	LZM	11/23-'19
PART NO		CHECKED BY		
DRAWING NO		APPROVED BY		
SCALE	1:1	UNIT	mm	PAGE 1/1
				SIZE A4