


RoHS



REV	ECN NO	DESCRIPTION	DATE	NAME
A		NEW		

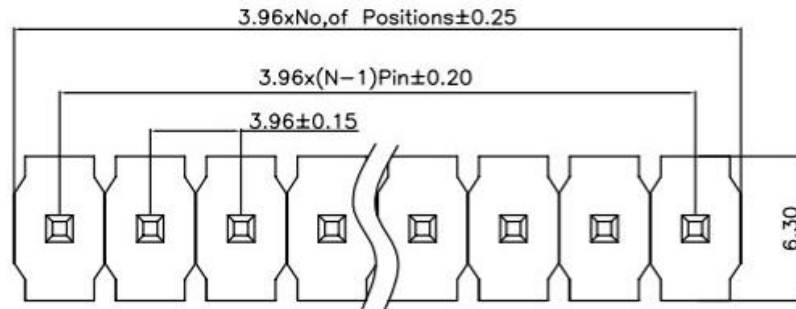

Specifications


- 1.Current Rating:5.0Amps
- 2.Insulation Resistance:1000 MΩ min.
- 3.Dielectric withstanding Voltage:1000V AC/DC
- 4.Contact Resistance:20 mΩ max.
- 5.Operating Temperature:-40°C to+105°C
- 6.Contact Material: Brass
- 7.Insulation Material:Asfollows,UL94V-0,Black
- 8.Plated: Au Over Ni

Ordering Information

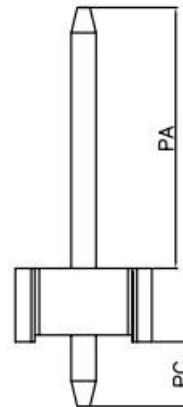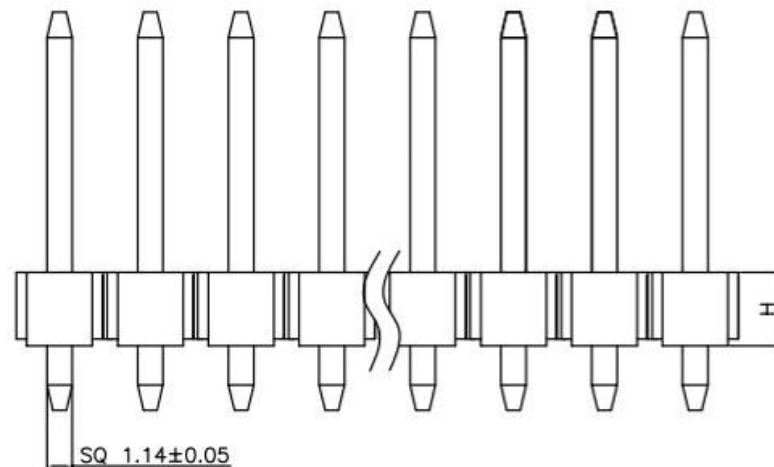

PIN数每排	产品类型	电镀规格	流水号	包装类型
1-40P	0=180° 1=90° 2=SMT 9=焊线式	0=Au0.8" 1=Au1" 2=Au1.5" 3=Au2" 4=Au3" 5=Au5" 6=Au10" 7=半金锡 8=镀亮锡 9=镀雾锡	01-69不带柱 70-99带内柱	A=袋装 B=管装 C=盘装 D=卷装

Dimension antitheses list				
ITEM	PC	PA	H	Pin Length
Standard	2.80	11.40	3.20	17.4
Alternate				

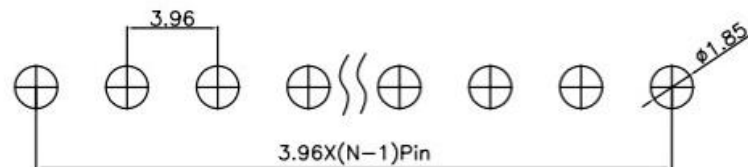

PCB LAYOUT

STANDARD TOLERANCE (EXCEPT SPECIFIED)			
LINER	ANGLES		
.0	±0.30	0.°	±3°
.00	±0.20	.0°	±2°
.000	±0.10	.00°	±1°

广东科斯达电子科技有限公司

TITLE	PH3.96mm Pin Header Single Row 180°	DRAWN BY	YTT	16.02.03
PART NO		CHECKED BY		
DRAWING NO		APPROVED BY		
SCALE	1:1	UNIT	mm	
PAGE	1/1	SIZE	A4	