
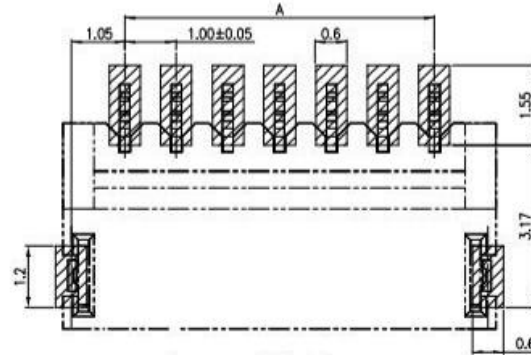


RoHS

REV	ECN NO	DESCRIPTION	DATE	NAME
A	—	NEW	11/25-'19	ZCD

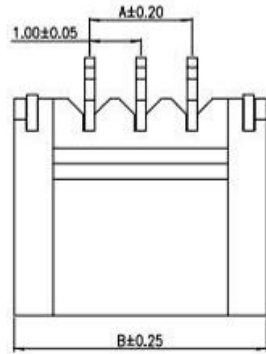

Recommend PCB Layout

Main Specifications

Poles: 02 to 20

Contact resistance: $\leq 20m \Omega$




Insulation resistance: $\geq 100M \Omega$

Rated voltage: 125V AC DC

Rated current: 1.0A AC DC

Withstand Voltage: 500V AC/minute

Temperature Range: $-25^{\circ}C \sim +85^{\circ}C$



ORDER INFORMATION:




PART No. _____

No. FOR CIRCUITS: _____
02

PLASTIC MATERIAL: _____
FOM=Thermal Plastic (Nature)

PACKAGING:
R=REEL
G=TUBE
P=PE

PLATING:
B=MATTE Sn-plated



Circuit	Dimensions (mm)		
	DIM. A	DIM. B	DIM. C
02	1.00	3.90	2.50
03	2.00	4.90	3.50
04	3.00	5.90	4.50
05	4.00	6.90	5.50
06	5.00	7.90	6.50
07	6.00	8.90	7.50
08	7.00	9.90	8.50
09	8.00	10.90	9.50
10	9.00	11.90	10.50
11	10.00	12.90	11.50
12	11.00	13.90	12.50
13	12.00	14.90	13.50
14	13.00	15.90	14.50
15	14.00	16.90	15.50
16	15.00	17.90	16.50
~	~	~	~
20	19.00	21.90	20.50

STANDARD TOLERANCE
(EXCEPT SPECIFIED)

LINER ANGLES

.0 ±0.30 0.° ±5°

.00 ±0.25 .0° ±2°

.000 ±0.10 .00° ±1°

ITEM	COMPONENT	Q'TY	MATERIAL	FINISH
C	SOLDER TAB	2 PCS	PhosphorBronze	MATTE Sn-plated
B	CONTACT	n PCS	PhosphorBronze	MATTE Sn-plated
A	HOUSING	1 PCS	Thermal Plastic	UL 94V-0, COLOR:Nature

广东科斯达开关厂

TITLE	1.0mm Pitch 90° Wafer SMT TYPE	DRAWN BY	ZCD	DATE	11/25-'19
PART NO.		CHECKED BY			
DRAWING NO.		APPROVED BY			
SCALE	1:1	UNIT	mm	PAGE	1/1
SIZE	A4				