






RoHS

REV	ECN NO	DESCRIPTION	DATE	NAME
A		NEW		

Technical Specs:

Insulator: Black glass filled polyester PPS-GF30-FR
Flammability: UL 94V-0
Contact: Brass C3604
Connecting pin: Ø0.50
Mechanical life: min500 cycles
Rated current: 2A
Dielectric strength: Min 1000V RMS
Terminations: max 10mΩ

Ordering Information

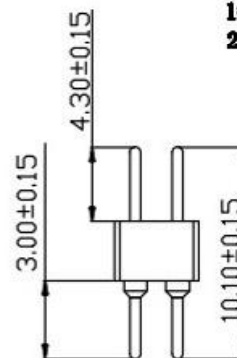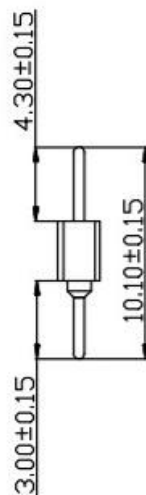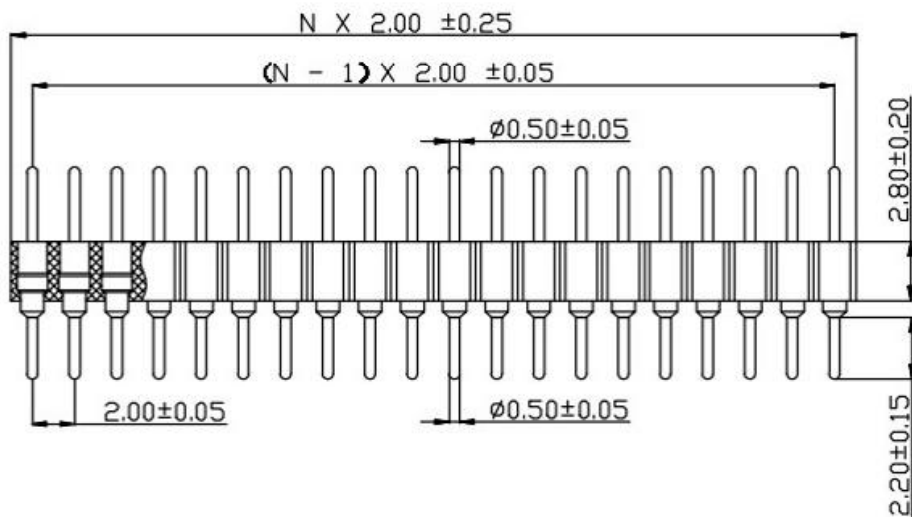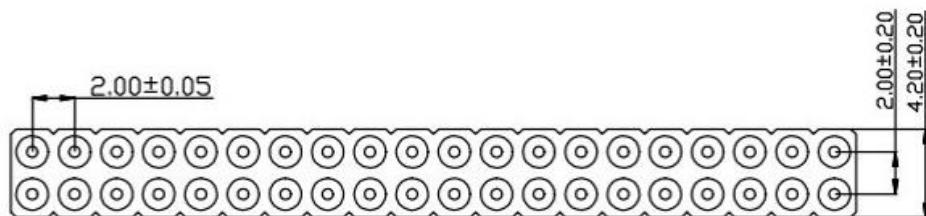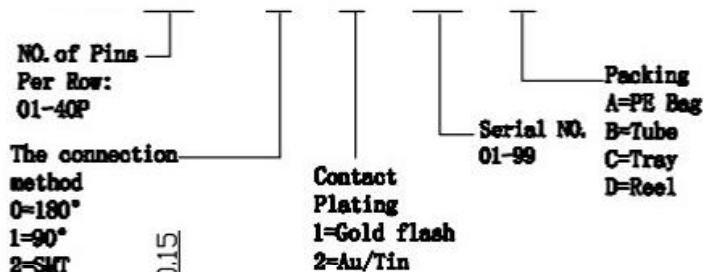

广东科斯达电子科技有限公司

STANDARD TOLERANCE (EXCEPT SPECIFIED)

LINER		ANGLES	
.0	±0.30	0.°	±3°
.00	±0.20	.0°	±2°
.000	±0.10	.00°	±1°

TITLE		PIL-09m-L Machined Male Header P=2.00 Single row/Dual row 180° Type		DRAWN BY		Lujunhui		18. 11. 12	
PART NO				CHECKED BY					
DRAWING NO				APPROVED BY					
SCALE	1:1	UNIT	mm	PAGE	1/1	SIZE	A4		