
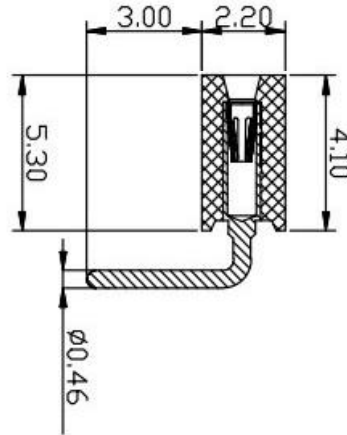
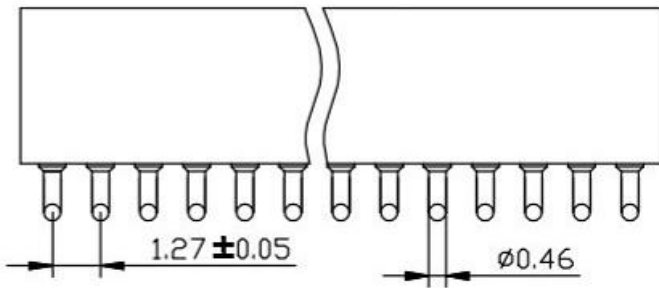


RoHS

REV	ECN NO	DESCRIPTION	DATE	NAME
A		REV		

Technical Specs:

Insulator: Black glass filled polyester PCT-GF30-FR
 Flammability: UL 94V-0
 Sleeve: Brass(H59-3)
 Contact clip(3 finger):Beryllium copper(C17300)
 Accepted pin: $\varnothing 0.38$ to 0.50mm
 Forces: (polished steel gauge $\varnothing 0.41\text{mm}$)
 -Insertion 0.5N Typ
 -Withdrawal 0.2N Typ
 Mechanical life: min500 cycles
 Rated current: 1A
 Contact resistance: max 20m Ω
 Dielectric resistance: min 500V RMS

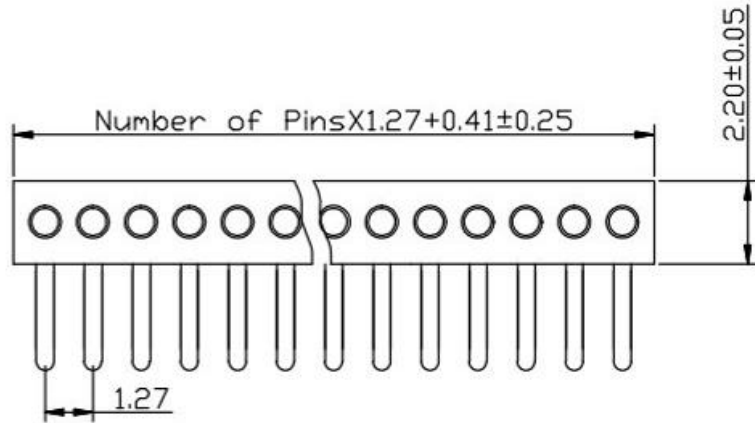

Ordering Information

NO. of Pins Per Row: 01-40P				Packing A=PE Bag B=Tube C=Tray D=Reel
The connection method 0=180° 1=90° 2=SMT	Contact Plating 1=Gold flash 2=Au/Tin 3=Tin	Serial NO. 01-99		

广东科斯达电子科技有限公司

STANDARD TOLERANCE (EXCEPT SPECIFIED)	
LINER	ANGLES
$.0 \pm 0.30$	$0.^\circ \pm 3^\circ$
$.00 \pm 0.20$	$.0^\circ \pm 2^\circ$
$.000 \pm 0.10$	$.00^\circ \pm 1^\circ$

TITLE		REV. 01-11-10 Mechanical Drawing P=4.1 Single size 8" Type		DRAWN BY	Lujunhui	12.11.10
PART NO				CHECKED BY		
DRAWING NO				APPROVED BY		
SCALE	1:1	UNIT	mm	PAGE	1/1	SIZE A4