
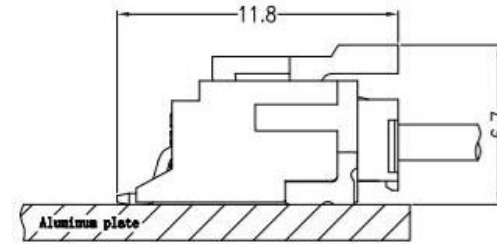
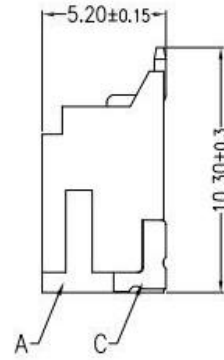


RoHS



REV	ECN NO	DESCRIPTION	DATE	NAME
A	—	NEW	11/23-'19	HYJ

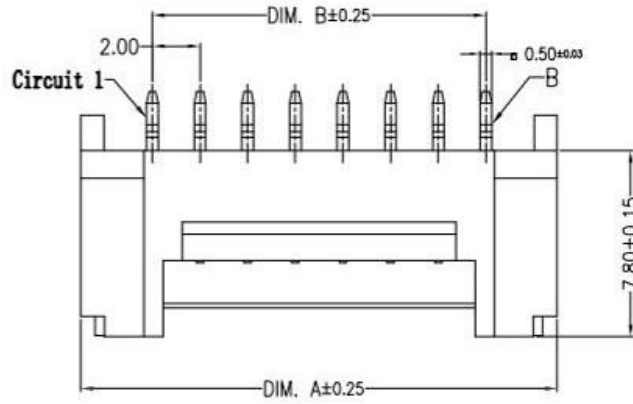

Assembly Layout

Main Specifications

Poles: 02 to 16
 Contact resistance: $\leq 20m \Omega$
 Insulation resistance: $\geq 1000M \Omega$
 Rated voltage: 250V AC DC
 Rated current: 2.0A AC DC
 Withstand Voltage: 1000V AC/minute
 Temperature Range: $-25^{\circ}C \sim +105^{\circ}C$

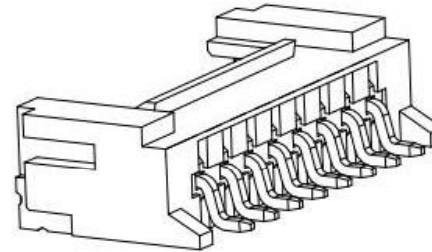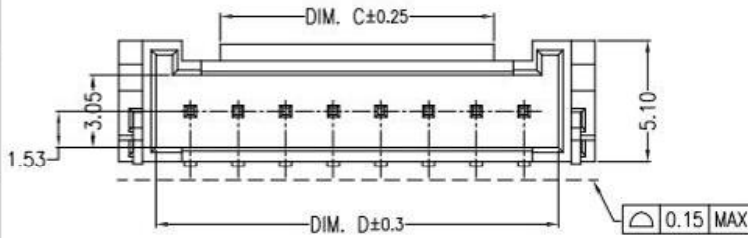


ORDER INFORMATION:

PART No. _____
No. OF CIRCUITS: _____
 02~16
PLASTIC MATERIAL: _____
 F2M=LCP (BEIGE)
 C1C=PA6T (BEIGE)
 D1K=PA9T (BLACK)

PACKAGING:
 R=REEL
 G=TUBE
 P=PE
PLATING:
 A=Sn

ITEM	COMPONENT	Q'TY	MATERIAL	FINISH
C	SOLDER TAB	2 PCS	Brass	Sn-plated
B	CONTACT	1~16 PCS	Brass	Sn-plated
A	PEDESTAL	1 PCS	LCP/PA6T/PA9T	UL 94V-0

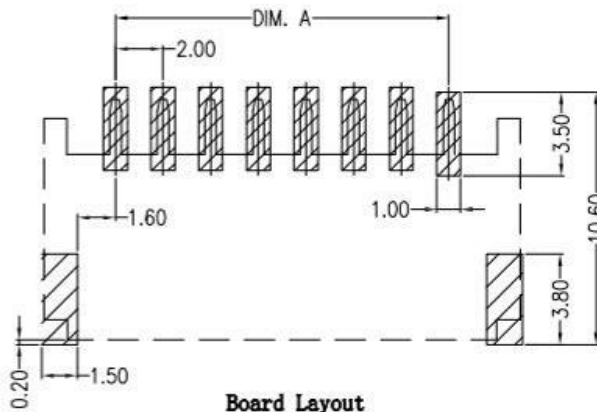

Board Layout
General Tolerance: ± 0.05

Circuits	Dimensions (mm)			
	DIM. A	DIM. B	DIM. C	DIM. D
02	8.00	2.00	2.70	4.75
03	10.00	4.00	3.20	6.75
04	12.00	6.00	3.50	8.90
05	14.00	8.00	5.50	10.90
06	16.00	10.00	7.50	12.90
07	18.00	12.00	9.50	14.90
08	20.00	14.00	11.50	16.90
09	22.00	16.00	13.50	18.90
10	24.00	18.00	15.50	20.90
11	26.00	20.00	15.50	22.90
12	28.00	22.00	15.50	24.90
13	30.00	24.00	15.50	26.90
14	32.00	26.00	15.50	28.90
15	34.00	28.00	15.50	30.90
16	36.00	30.00	15.50	32.90

STANDARD TOLERANCE
(EXCEPT SPECIFIED)

LINER	ANGLES
.0 ± 0.30	$0^{\circ} \pm 3^{\circ}$
.00 ± 0.20	$0^{\circ} \pm 2^{\circ}$
.000 ± 0.10	$0.00^{\circ} \pm 1^{\circ}$

广东科斯达开关厂

TITLE	2.00mm PITCH 90° WAFER SMT TYPE	DRAWN BY	HYJ	11/23-'19
PART NO		CHECKED BY		
DRAWING NO		APPROVED BY		
SCALE	1:1	UNIT	mm	PAGE 1/1
				SIZE A4