
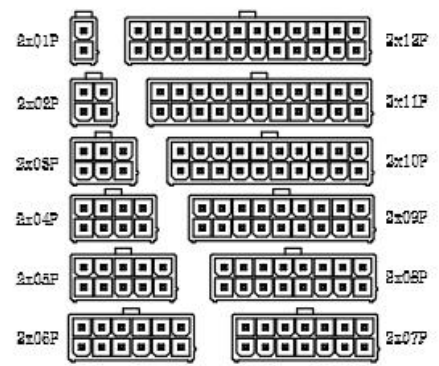


RoHS

REV	ECN NO	DESCRIPTION	DATE	NAME
A		NEW		


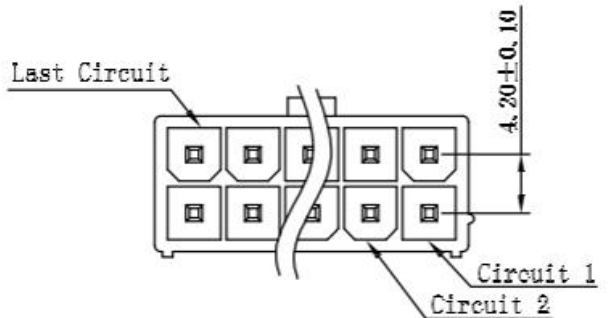


CIRCUIT SIZE LAYOUT



Note:

1. Material
 - 1.1: Housing: NY66, Color: White
 - 1.2: Contact: Brass, Tin.
2. Rating:
 - 2.1: Operating Voltage: 250V AC/DC.
 - 2.2: Current Rating: 9A AC/DC.
 - 2.3: Operating Temperature: -25°C ~ +85°C.
 - 2.4: Contact Resistance: 30 mΩ max.
 - 2.5: Insulation Resistance: 1000 MΩ min.
 - 2.6: Dielectric withstanding Voltage: AC 1500V

3. Part Number:

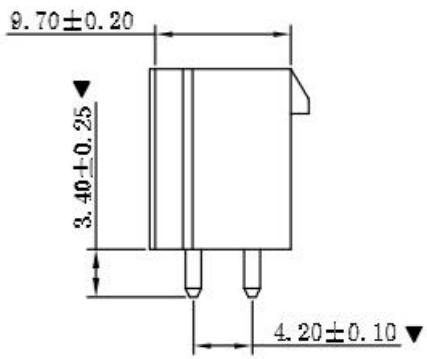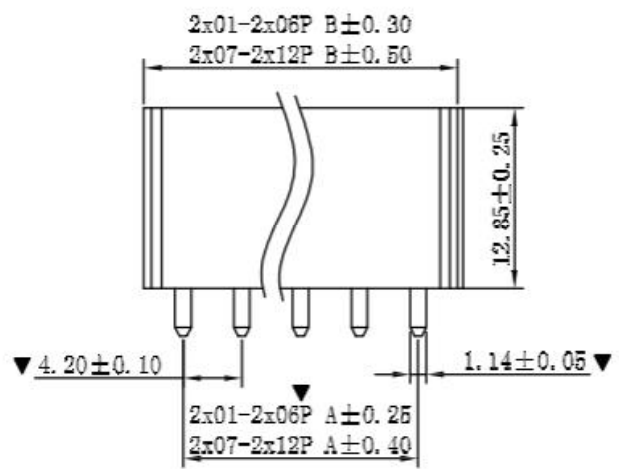

Ordering Information

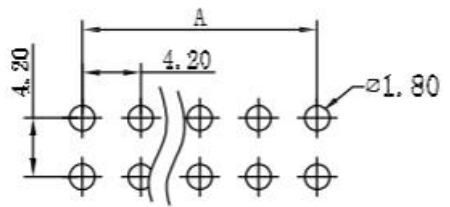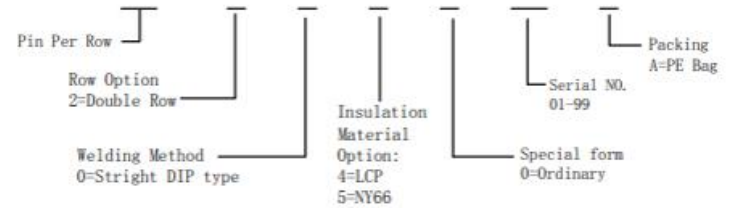

P. C. B LAYOUT

广东科斯达开关厂

STANDARD TOLERANCE (EXCEPT SPECIFIED)	
LINER	ANGLES
.0 ± 0.30	0.° ± 3°
.00 ± 0.20	.0° ± 2°
.000 ± 0.10	.00° ± 1°

TITLE		PH4.2mm Wafer Double row, DIP Stright type	DRAWN BY	WZG	17.03.30
PART NO			CHECKED BY		
DRAWING NO			APPROVED BY		
SCALE	1:1	UNIT	mm	PAGE	1/1
				SIZE	A4