

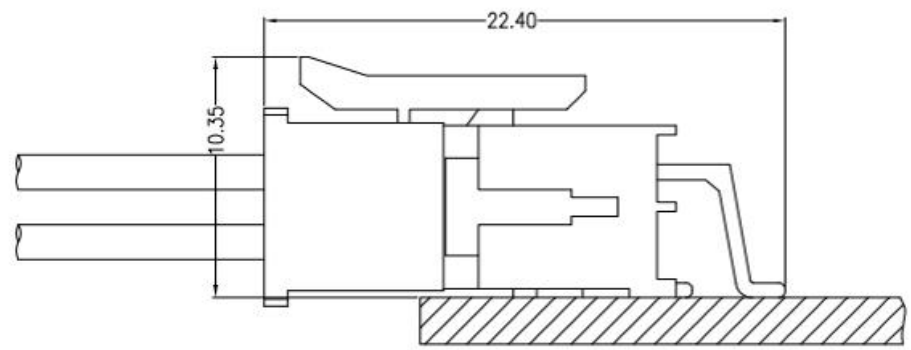
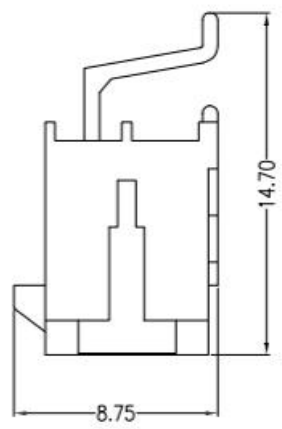


REV	ECN NO	DESCRIPTION	DATE	NAME
A		NEW	11/21-'19	LZM

RoHS


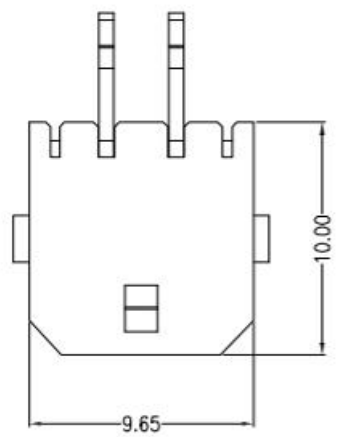


Assembly Layout

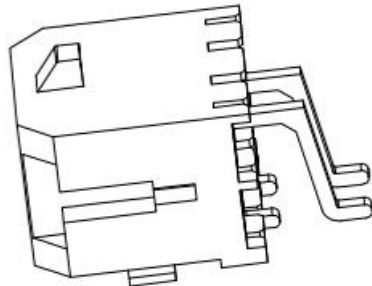


主要技术参数 Main Specifications

- 线数 (Poles) :02
- 接触电阻 (Contact resistance): $\leq 20m\ \Omega$
- 绝缘电阻 (Insulation resistance): $\geq 1000M\ \Omega$
- 额定电压 (Rated voltage):250V AC DC
- 额定电流 (Rated current):5A AC DC
- 耐电压 (Withstand Voltage):1500V AC/minute
- 温度范围 (Temperature Range):-25°C~+105°C

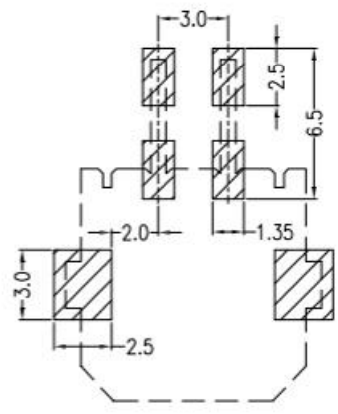

Mating PCB detail

ORDER INFORMATION:

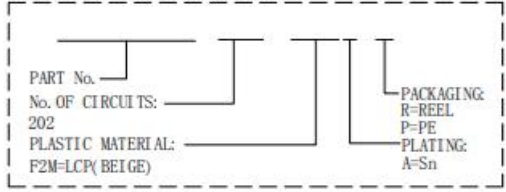

广东科斯达开关厂

NO.	DESCRIPTION	QTY	MATERIAL	PLATING/COLOR
A	Insulator	1	LCP(UL94V-0)	Black
B	Contacts	4	Brass	Tin-plated
C	Solder Tab	2	Brass	Tin-plated

STANDARD TOLERANCE (EXCEPT SPECIFIED)	
LINER	ANGLES
.0 ± 0.30	0.° $\pm 3^\circ$
.00 ± 0.20	.0° $\pm 2^\circ$
.000 ± 0.10	.00° $\pm 1^\circ$

TITLE	A3001AWR-202 Double Row	DRAWN BY	LZM	11/21-'19
PART NO		CHECKED BY		
DRAWING NO		APPROVED BY		
SCALE	1:1	UNIT	mm	PAGE 1/1
				SIZE A4