


RoHS



REV	ECN NO	DESCRIPTION	DATE	NAME
A		NEW		

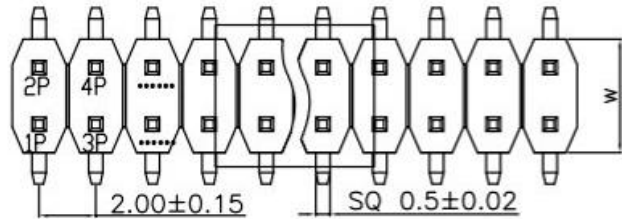

Specifications


1. Current Rating: 2.0Amps
2. Insulation Resistance: 1000 MΩ min.
3. Dielectric withstanding Voltage: 500V AC/DC
4. Contact Resistance: 20 mΩ max.
5. Operating Temperature: -40°C to +105°C
6. Contact Material: Brass
7. Insulation Material: As follows, UL94V-0, Black
8. Plated: Au Over Ni

Ordering Information

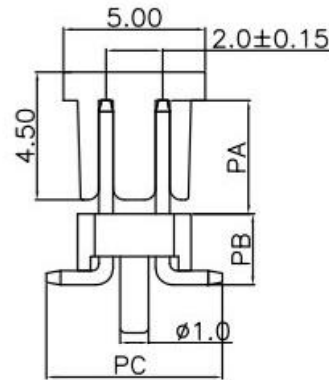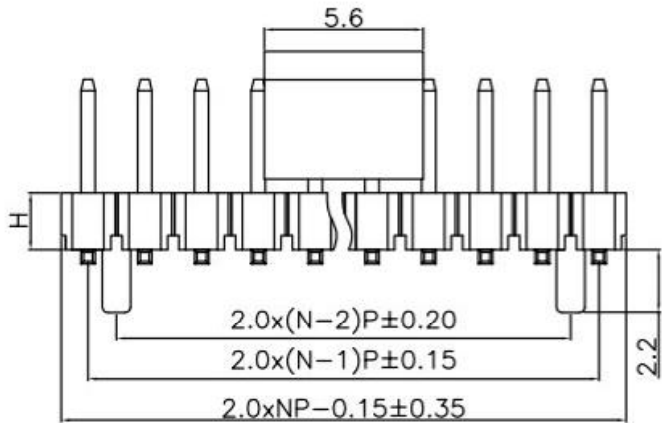

Insulation Height*Wide (H*W)	NO. of Pins Per Row: 1-50P	Insulation Material Option:	Contact Plating	Serial NO. 01-69	Packing
Option:		1=PBT	0=0.8" Gold		A=PE Bag
10=1.0*2.0		2=PPS	1=Au1" Gold		B=Tube
15=1.5*2.3		3=NY6T	2=Au1.5" Gold		C=Tray
25=2.54*5.0		4=LCP	3=Au2" Gold		D=Reel
		5=NY66	4=Au3" Gold		
		6=Customized	5=Au5" Gold		
		7=NY46	6=Customized		
		8=NY9T	7=Gold/Tin		
			8=Tin		

ITEM	PC	PB	PA	H	Pin Length
Standard	6.50	2.70	4.20	2.00	12.0
Alternate					

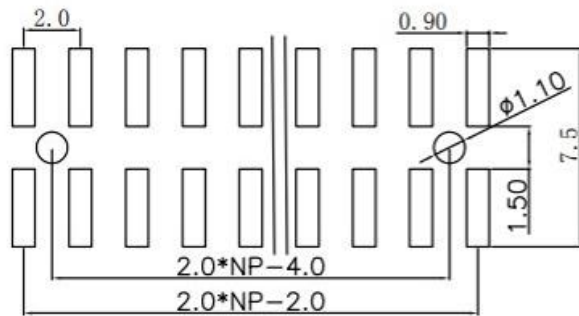

PCB LAYOUT

STANDARD TOLERANCE (EXCEPT SPECIFIED)

LINER	ANGLES
.0 ±0.30	0.° ±3°
.00 ±0.20	.0° ±2°
.000 ±0.10	.00° ±1°

广东科斯达电子科技有限公司

TITLE	PH2.00mm Pin Header Dual Row SMT	DRAWN BY	YTT	16.02.03
PART NO		CHECKED BY		
DRAWING NO		APPROVED BY		
SCALE	1:1	UNITE	mm	PAGE 1/1
				SIZE A4