

RoHS





REV	ECN NO	DESCRIPTION	DATE	NAME
A		NEW		

Specifications

- 1.Current Rating:1.0Amps
- 2.Insulation Resistance:1000 MΩ min.
- 3.Dielectric withstanding Voltage: 500V AC/DC
- 4.Contact Resistance:20 mΩ max.
- 5.Operating Temperature:-40°C to+105°C
- 6.Contact Material: Brass
- 7.Insulation Material:Asfollows,UL94V-0,Black
- 8.Plated: Au Over Ni

Ordering Information

Insulation Height*Wide (H*W) 5.4*5.5	Per Row: 10P 26P 30P 40P 44P	Insulation Material Option: 1-PBT 2-PPS 3-NY6T 4-LCP 5-NY66 6-Customized 7-NY46 8-NY9T	Contact Plating 0=0.8" Gold 1=Au1" Gold 2=Au1.5" Gold 3=Au2" Gold 4=Au3" Gold 5=Au5" Gold 6=Customized 7=Gold/Tin 8=Tin	Serial NO. 01-69	A. 袋装 B. 管装 C. 盘装 D. 卷装
---	---	---	--	---------------------	----------------------------------

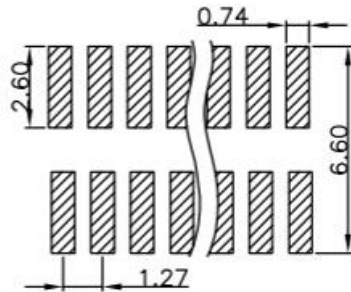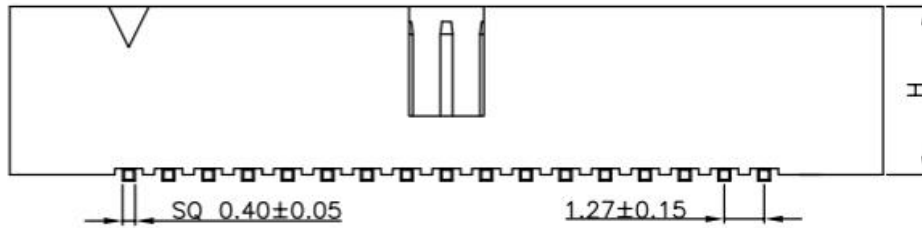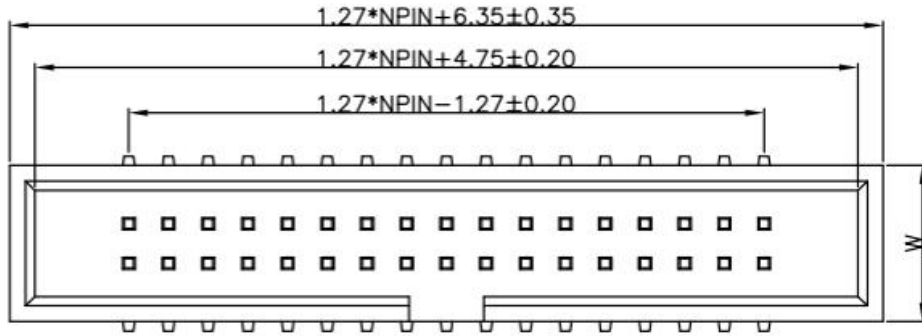

PCB LAYOUT

Dimension antitheses list			
ITEM	PC	H	Pin Length
Standard	5.60	5.4	7.00
Alternate			

广东科斯达开关厂

STANDARD TOLERANCE
(EXCEPT SPECIFIED)

LINER		ANGLES	
.0	±0.30	0.°	±3°
.00	±0.20	.0°	±2°
.000	±0.10	.00°	±1°

TITLE	PH1.27mm Pin Header Dual Row SMT	DRAWN BY	YTT	16.02.03
PART NO		CHECKED BY		
DRAWING NO		APPROVED BY		
SCALE	1:1	UNIT	mm	PAGE
				1/1
				SIZE
				A4