



RoHS

| REV | ECN NO | DESCRIPTION | DATE | NAME |
|-----|--------|-------------|------|------|
| A | | NEW | | |

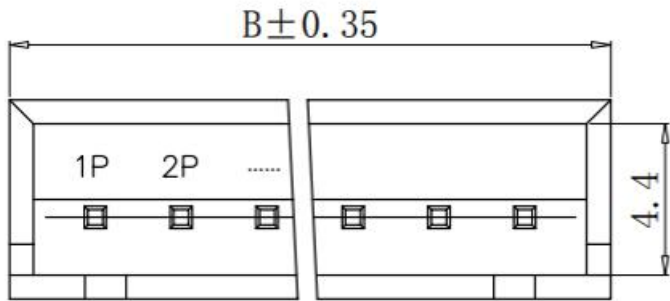


Note:


1. Material
 - 1.1: Housing: NY66, Color: Nature
 - 1.2: Contact: Brass, Tin.
2. Rating:
 - 2.1: Operating Voltage: 250V AC/DC.
 - 2.2: Current Rating: 3A AC/DC.
 - 2.3: Operating Temperature: -25°C ~ +85°C.
 - 2.4: Contact Resistance: 30 mΩ max.
 - 2.5: Insulation Resistance: 1000 MΩ min.
 - 2.6: Dielectric withstanding Voltage: AC 500V
 - 2.7: Applicable Wire: AWG#24~#30
3. Pater Number:

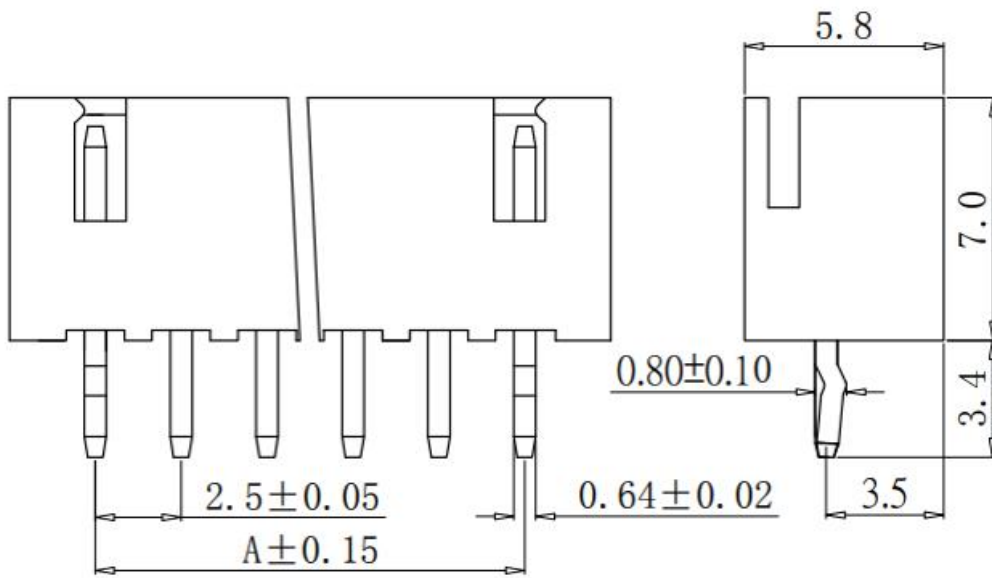

Ordering Information

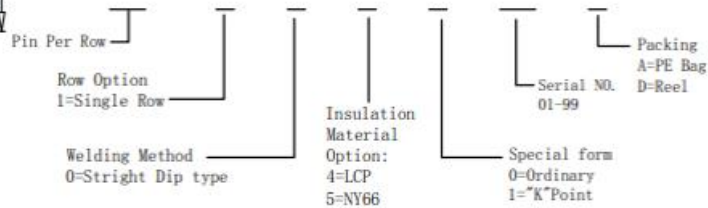

| PARTNO | Dimensions | |
|--------|------------|------|
| | A | B |
| 2P | 2.5 | 7.5 |
| 3P | 5.0 | 10.0 |
| 4P | 7.5 | 12.5 |
| 5P | 10.0 | 15.0 |
| 6P | 12.5 | 17.5 |
| 7P | 15.0 | 20.0 |
| 8P | 17.5 | 22.5 |
| 9P | 20.0 | 25.0 |
| 10P | 22.5 | 27.5 |
| 11P | 25.0 | 30.0 |
| 12P | 27.5 | 32.5 |
| 13P | 30.0 | 35.0 |
| 14P | 32.5 | 37.5 |
| 15P | 35.0 | 40.0 |
| 16P | 37.5 | 42.5 |

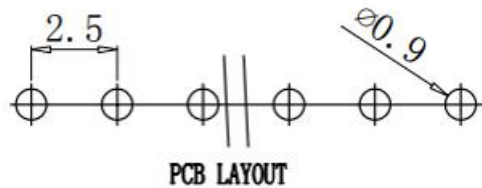

广东科斯达开关厂

| STANDARD TOLERANCE (EXCEPT SPECIFIED) | | | |
|---------------------------------------|-------|--------|-----|
| LINER | | ANGLES | |
| .0 | ±0.30 | 0.° | ±3° |
| .00 | ±0.20 | .0° | ±2° |
| .000 | ±0.10 | .00° | ±1° |

| | | | | |
|------------|--|-------------|-----|----------|
| TITLE | PH2.5mm Wafer Single row, Stright Dip type | DRAWN BY | WZG | 17.03.30 |
| PART NO | | CHECKED BY | | |
| DRAWING NO | | APPROVED BY | | |
| SCALE | 1:1 | UNIT | mm | PAGE 1/1 |
| | | | | SIZE A4 |