
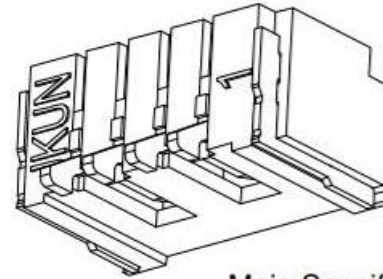
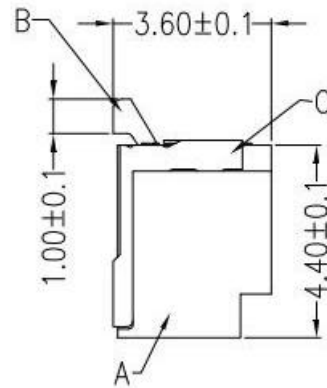


RoHS




REV	ECN NO	DESCRIPTION	DATE	NAME
A	—	NEW	11/28-'19	LZM

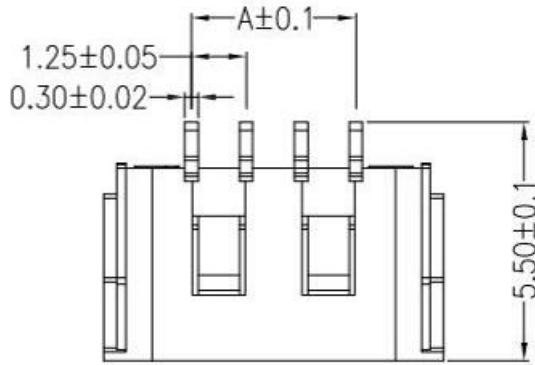

Main Specifications

- Poles: 02 to 16
- Contact resistance: $\leq 20m \Omega$
- Insulation resistance: $\geq 100M \Omega$
- Rated voltage: 125V AC DC
- Rated current: 1.0A AC DC
- Withstand Voltage: 500V AC/minute
- Temperature Range: $-25^{\circ}C \sim +105^{\circ}C$

ORDER INFORMATION:

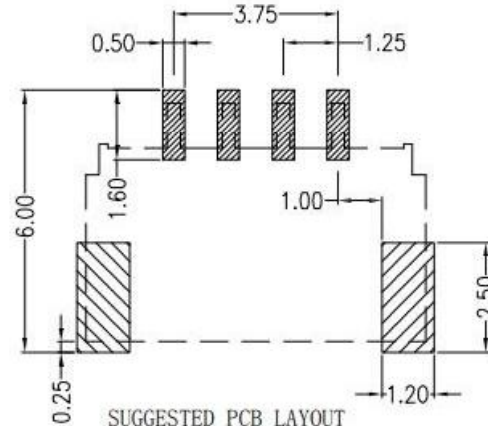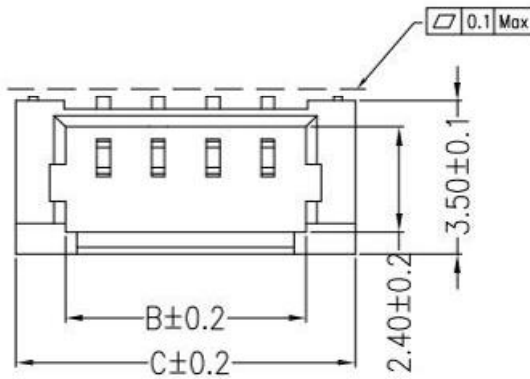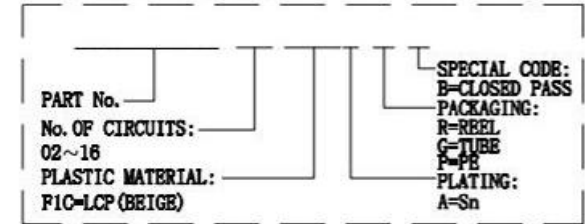

SUGGESTED PCB LAYOUT
(COMPONENT SIDE)

NO.	DESCRIPTION	QTY	MATERIAL	PLATING/COLOR
A	Insulator	1	LCP (UL94V-0)	Beige
B	Contacts	2~16	PhosphorBronze	Tin-plated
C	Solder Tab	2	PhosphorBronze	Tin-plated

Circuit	Dimensions (mm)			Circuit	Dimensions (mm)		
	A	B	C		A	B	C
02	1.25	3.15	5.25	10	11.25	13.15	15.25
03	2.50	4.40	6.50	11	12.50	14.40	16.50
04	3.75	5.65	7.75	12	13.75	15.65	17.75
05	5.00	6.90	9.00	13	15.00	16.90	19.00
06	6.25	8.15	10.25	14	16.25	18.15	20.25
07	7.50	9.40	11.50	15	17.50	19.40	21.50
08	8.75	10.65	12.75	16	18.75	20.65	22.75
09	10.00	11.90	14.00				

STANDARD TOLERANCE (EXCEPT SPECIFIED)

LINER	ANGLES
.0 ±0.30	0.° ±5°
.00 ±0.25	.0° ±2°
.000 ±0.10	.00° ±1°

广东科斯达开关厂

TITLE	1.25mm PITCH 90° Wafer SMT TYPE	DRAWN BY	LZM	11/28-'19
PART NO.		CHECKED BY		
DRAWING NO.		APPROVED BY		
SCALE	1:1	UNIT	mm	PAGE 1/1
				SIZE A4