

RoHS

REV	ECN NO	DESCRIPTION	DATE	NAME
A		NEW		




Specifications

1. Current Rating: 3Amps
2. Contact Resistance: 20mΩ
3. Insulator Resistance: 1000 Megohms min.
4. Dielectric withstanding Voltage: AC/DC 1000V
5. Operating Temperature: -40℃ to +105℃
6. Contact Material: Copper alloy
7. Insulator Material: As follows
8. Plated: As follows

Ordering Information

Insulation Height*Wide (H*W)	NO. of Pins Per Row: 1-40P	Insulation Material Option:	Contact Plating	Serial NO. 01-89 (No pillars) 70-89 (pillars) 90-99 (outside pillars)	Packing A=PE Bag B=Tube C=Tray D=Reel
Option: 50=5.0*5.0 57=5.7*5.0 71=7.1*5.0 80=8.0*5.0 85=8.5*5.0		1=PBT 2=PPS 3=NY6T 4=LCP 5=NY66 6=Customized 7=NY46 8=NY9T	0=0.8" Gold 1=Au1" Gold 2=Au1.5" Gold 3=Au2" Gold 4=Au3" Gold 5=Au5" Gold 6=Customized 7=Gold/Tin 8=Tin		

Dimension antitheses list			
ITEM	PC	H	W
Standard	5.4	5.0/5.7/7.1/8.0/8.5	5.0
Alternate			

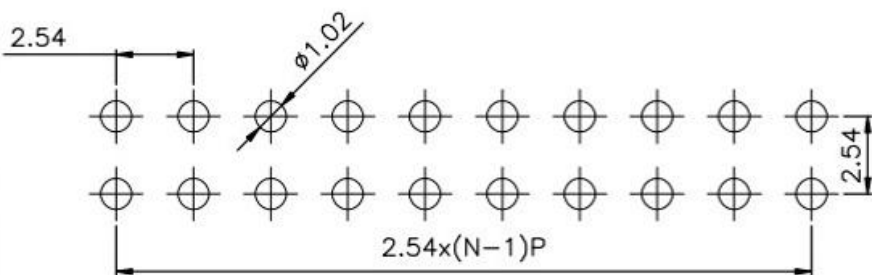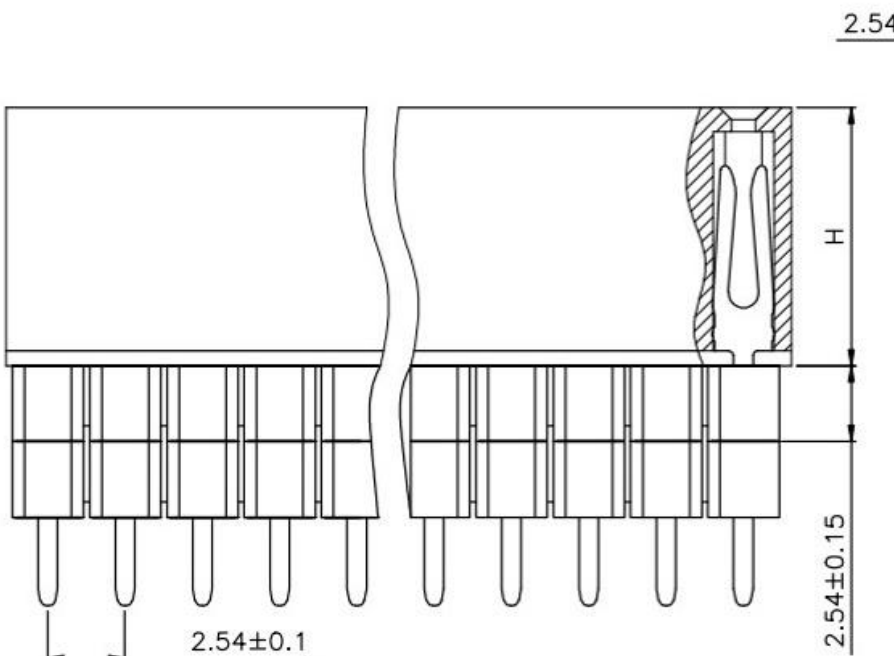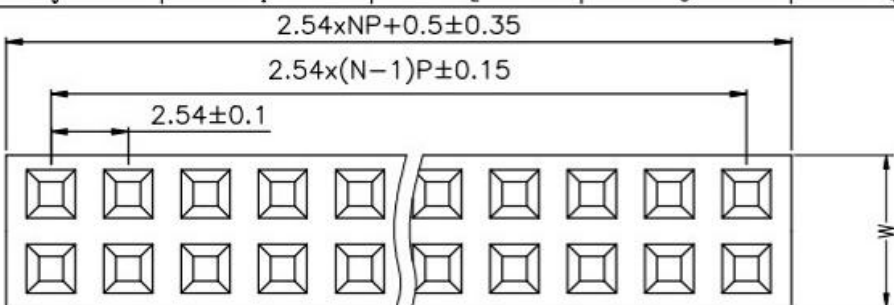

PCB LAYOUT

STANDARD TOLERANCE (EXCEPT SPECIFIED)

LINER	ANGLES
.0 ±0.30	0.° ±3°
.00 ±0.20	.0° ±2°
.000 ±0.10	.00° ±1°

广东科斯达开关厂									
TITLE	PH2.54mm 2XNP 180° Dual row Female Header Y Type With Housing(H2.54*2)		DRAWN BY	Lujunhui	18.08.17				
PART NO			CHECKED BY						
DRAWING NO			APPROVED BY						
SCALE	1:1	UNIT	mm	PAGE	1/1	SIZE	A4		