

# RoHS

REV	REV NO	DESCRIPTION	DATE	NAME
A		REV		

## Materials

Pin (outer sleeve) :Brass,machined, CuZn38Pb2

Clip(contact 4 finger) :Beryllium copper,heat treated

Plating(outer sleeve) :

Tin plated : 2u"m/80u"nickel,5um/200u"Tin

Gold plated: 2u"m/80u"nickel,full gold

Plating clip(contact):

2um/80 u"nickel,gold or tin plating


Insulator body(black) : Glass filled thermoplastic polyester UL94V-0 electrical

Current rating : 3 Ampe/contact max.

Contact resistance : 10m Ω /contact

Insulation resistance : 1000M at V=100V

Operating voltage : 60 AC/DC

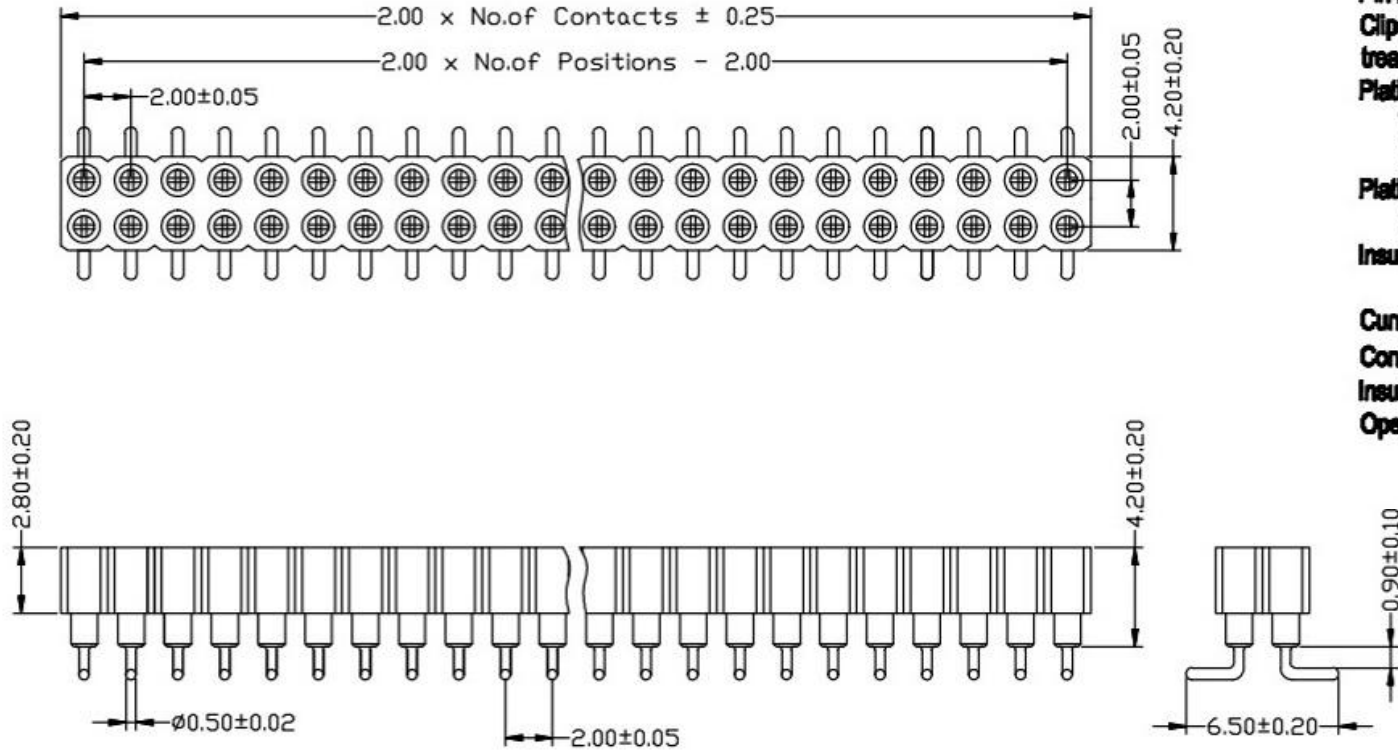

## Ordering Information

L488XX - X X XX X

NO. of Pins  
Per Row:  
01-40P

The connection  
method  
0=180°  
1=90°  
2=SMT

Contact  
Plating  
1=Gold flash  
2=Au/Tin  
3=Tin

Serial NO.  
01-99

Packing  
A=PE Bag  
B=Tube  
C=Tray  
D=Reel

# 广东科斯达电子科技有限公司

STANDARD TOLERANCE (EXCEPT SPECIFIED)	
LINEAR	ANGLES
.0 ±0.30	0.° ±3°
.00 ±0.20	.0° ±2°
.000 ±0.10	.00° ±1°

TITLE		REV. 0-1. X Standard 0-4.0 REV. 0-1.0 REV. 0-1.0 over Type		DRAWN BY	Lujunhui	12.11.10
PART NO				CHECKED BY		
DRAWING NO				APPROVED BY		
SCALE	1:1	UNIT	mm	PAGE	1/1	SIZE A4