

RoHS

REV	ECN NO	DESCRIPTION	DATE	NAME
A		NEW		

TECHNICAL DATE

Insulator:PP8 UL94V-0

Electrical


Insulation resistance: $\geq 1\text{KM}\Omega$ at V=100V

Mechanical

Operating temperature(continuous):-55°C+125°C

Soldering temperature:+260°C,10s max

Ordering Information

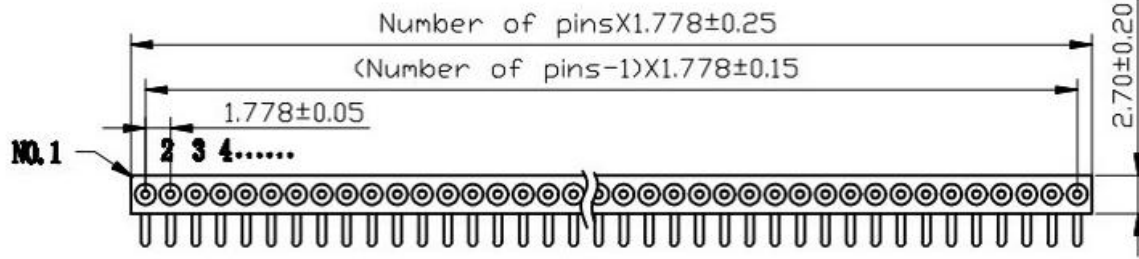



NO. of Pins
Per Row:
01-40P

The connection
method
0=180°
1=90°
2=SMT

Contact
Plating
1=Gold flash
2=Au/Tin

Serial NO.
01-99

Packing
A=PE Bag
B=Tube
C=Tray
D=Reel

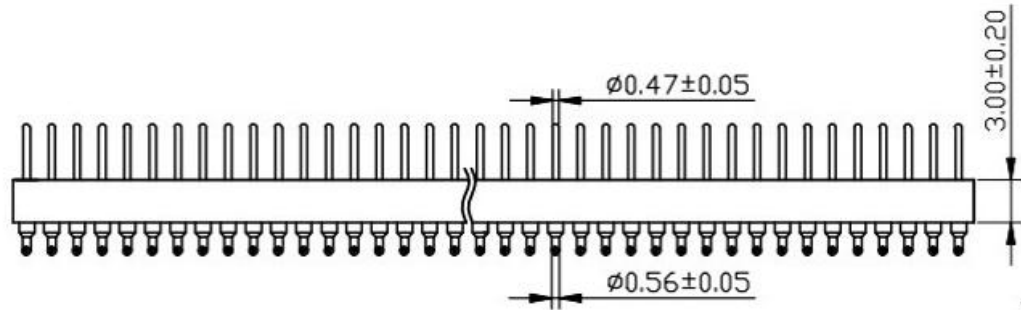

广东科斯达电子科技有限公司

STANDARD TOLERANCE
(EXCEPT SPECIFIED)

LINER	ANGLES
.0 ± 0.30	0.° $\pm 3^\circ$
.00 ± 0.20	.0° $\pm 2^\circ$
.000 ± 0.10	.00° $\pm 1^\circ$

TITLE	PHL 778m-L Modified Male Header H-0.0 Single row 90° Type	DRAWN BY	Lu junhui	18.11.12
PART NO		CHECKED BY		
DRAWING NO		APPROVED BY		
SCALE	1:1	UNIT	mm	
PAGE	1/1	SIZE	A4	