




RoHS

| REV | ECN NO | DESCRIPTION | DATE | NAME |
|-----|--------|-------------|------|------|
| A | | NEW | | |

Specifications


- 1.Current Rating:2.0Amps
- 2.Insulation Resistance:1000 MΩ min.
- 3.Dielectric withstanding Voltage: 500V AC/DC
- 4.Contact Resistance:20 mΩ max.
- 5.Operating Temperature:-40°C to+105°C
- 6.Contact Material: Brass
- 7.Insulation Material:Asfollows,UL94V-0,Black
- 8.Plated: Au Over Ni

Ordering Information

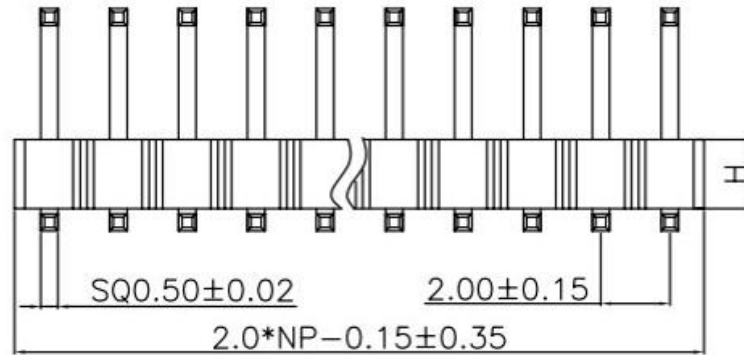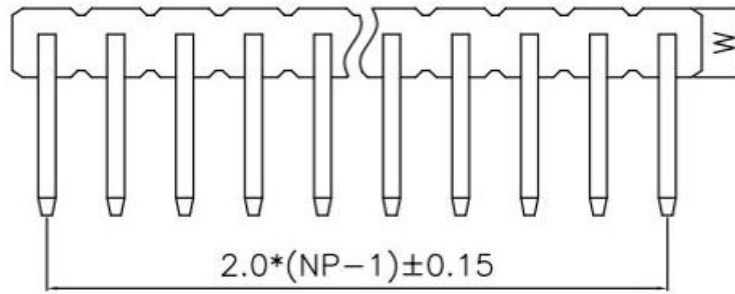

| Insulation Height*Wide (H*W) | NO. of Pins Per Row: 1-50P | Insulation Material Option: | Contact Plating | Serial NO. 01-69 | Packing |
|------------------------------|----------------------------|-----------------------------|-----------------|------------------|----------|
| 10=1.0*2.0 | | 1=PBT | 0=0.8" Gold | | A=PE Bag |
| 15=1.5*2.3 | | 2=PPS | 1=Au1" Gold | | B=Tube |
| 20=2.0*2.0 | | 3=NY6T | 2=Au1.5" Gold | | C=Tray |
| | | 4=LCP | 3=Au2" Gold | | D=Reel |
| | | 5=NY66 | 4=Au3" Gold | | |
| | | 6=Customized | 5=Au5" Gold | | |
| | | 7=NY46 | 6=Customized | | |
| | | 8=NY9T | 7=Gold/Tin | | |
| | | | 8=Tin | | |

| ITEM | PC2 | PC1 | PB | H | Pin Length |
|-----------|------|------|------|------|------------|
| Standard | 4.00 | 2.50 | 6.50 | 2.00 | 14.40 |
| Alternate | | | | | |

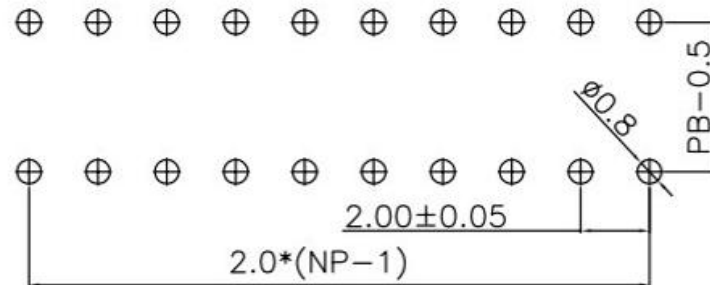

PCB LAYOUT

| STANDARD TOLERANCE (EXCEPT SPECIFIED) | |
|---------------------------------------|----------|
| LINER | ANGLES |
| .0 ±0.30 | 0.° ±3° |
| .00 ±0.20 | .0° ±2° |
| .000 ±0.10 | .00° ±1° |

广东科斯达开关厂

| | | | | |
|------------|---------------------------------------|-------------|-----|----------|
| TITLE | PH2.00mm Pin Header Single Row 90° | DRAWN BY | YTT | 16.02.03 |
| PART NO | | CHECKED BY | | |
| DRAWING NO | | APPROVED BY | | |
| SCALE | 1:1 | UNIT | mm | PAGE 1/1 |
| | | | | SIZE A4 |