



RoHS

REV	ECN NO	DESCRIPTION	DATE	NAME
A		NEW		


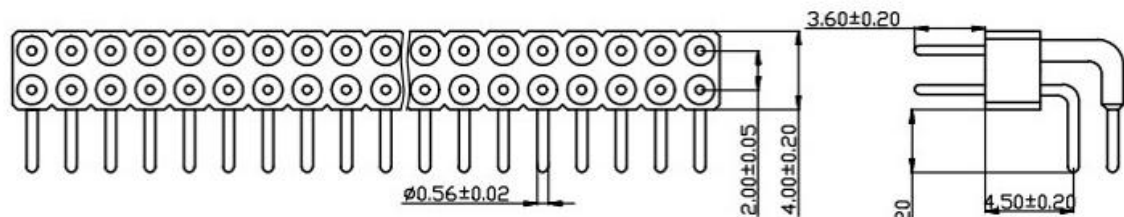


Technical Specs:

Insulator: Black glass filled polyester
 PPS-GF30-FR
Flammability: UL 94V-0
Sleeve: Brass (H59-3)
Contact clip(4 finger): Beryllium copper(C17200)
Accepted pin: $\varnothing 0.40$ to 0.58mm
Forces: (polished steel gauge $\varnothing 0.43\text{mm}$)
 -Insertion 2 N typ
 -Withdrawal 1 N typ
Mechanical life: min500 cycles
Rated current: 3A
Contact resistance: max 10m Ω
Dielectric resistance: Min 1000V RMS

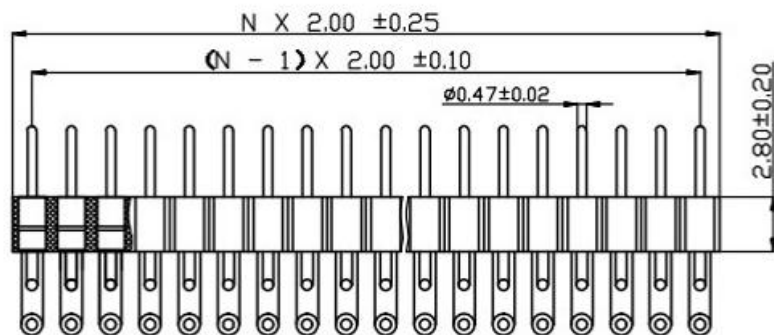

Ordering Information

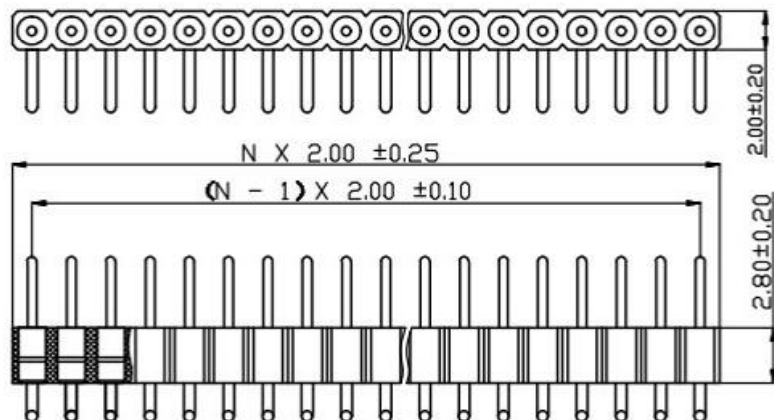

NO. of Pins
 Per Row:
 01-40P

The connection method
 0=180°
 1=90°
 2=SMT

Contact Plating
 1=Gold flash
 2=Au/Tin

Packing
 A=PE Bag
 B=Tube
 C=Tray
 D=Reel

Serial NO.
 01-99

广东科斯达电子科技有限公司

STANDARD TOLERANCE (EXCEPT SPECIFIED)	
LINER	ANGLES
.0 ±0.30	0.° ±3°
.00 ±0.20	.0° ±2°
.000 ±0.10	.00° ±1°

TITLE	FEEL Gun-L Machined Male Header H-2.80 Single row/Double row 90° Type	DRAWN BY	Lujunhui	18.11.12
PART NO		CHECKED BY		
DRAWING NO		APPROVED BY		
SCALE	1:1	UNIT	mm	PAGE 1/1
				SIZE A4