

RoHS

REV	ECN NO	DESCRIPTION	DATE	NAME
A		NEW		

Specifications

1. Current Rating: 3Amps
2. Contact Resistance: 20mΩ
3. Insulator Resistance: 1000 Megohms min.
4. Dielectric withstanding Voltage: AC/DC 1000V
5. Operating Temperature: -40℃ to +105℃
6. Contact Material: Copper alloy
7. Insulator Material: As follows
8. Plated: As follows

Ordering Information





Insulation Height*Wide (H*W) Option:	NO. of Pins Per Row: 1-40P	Insulation Material Option:	Contact Plating	Serial NO.	Packing
50=5.0*5.0		1=PBT	0=0.8" Gold	01-89 (No pillars)	A=PE Bag
57=5.7*5.0		2=PPS	1=Au1" Gold	70-89 (pillars)	B=Tube
71=7.1*5.0		3=NY6T	2=Au1.5" Gold	90-99 (outside pillars)	C=Tray
80=8.0*5.0		4=LCP	3=Au2" Gold		D=Reel
85=8.5*5.0		5=NY66	4=Au3" Gold		
		6=Customized	5=Au5" Gold		
		7=NY46	6=Customized		
		8=NY9T	7=Gold/Tin		
			8=Tin		

ITEM	PC	H	W
Standard	7.0	5.0/5.7/7.1/8.0/8.5	5.0
Alternate			

广东科斯达开关厂

TITLE	PH2.54mm 2XNP SMT Dual row Female Header Y Type With Post	DRAWN BY	Lu junhui	18.08.17
PART NO		CHECKED BY		
DRAWING NO		APPROVED BY		
SCALE	1:1	UNIT	mm	PAGE 1/1
		SIZE	A4	

STANDARD TOLERANCE (EXCEPT SPECIFIED)	
LINER	ANGLES
.0 ±0.30	0.° ±3°
.00 ±0.20	.0° ±2°
.000 ±0.10	.00° ±1°

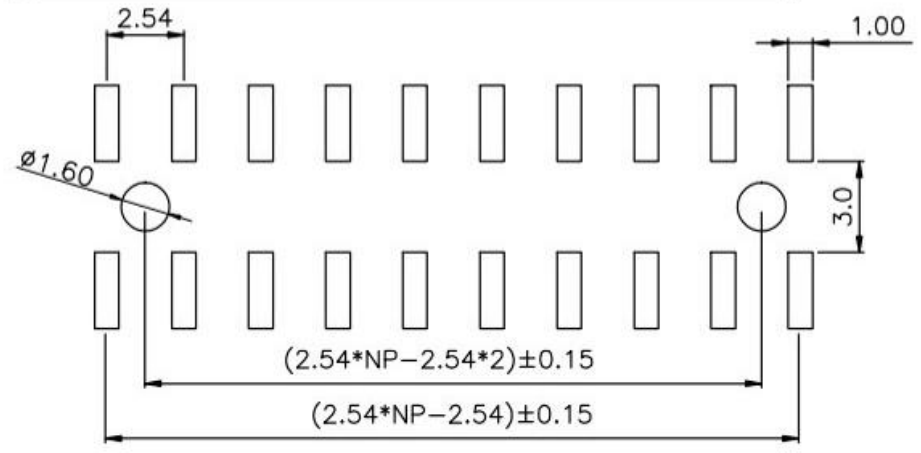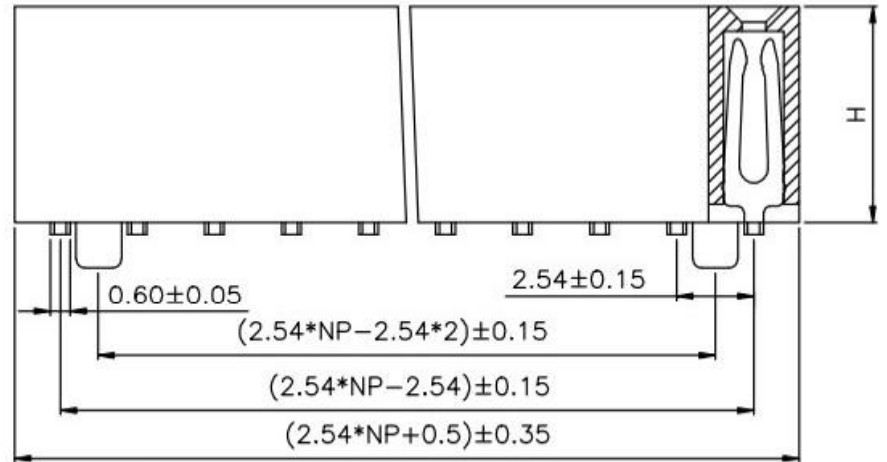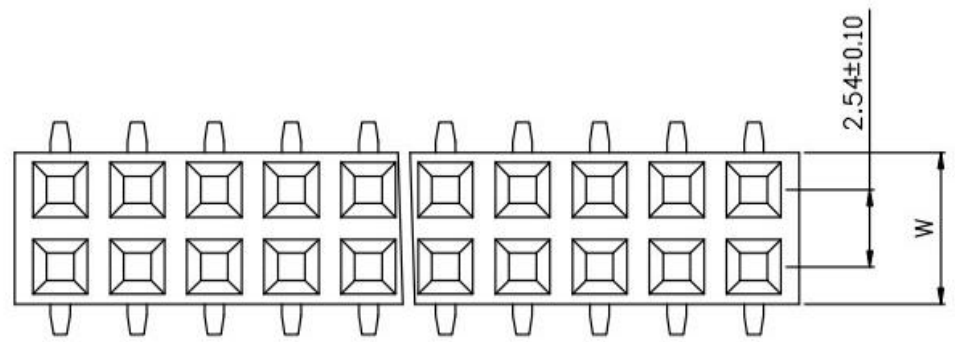

PCB LAYOUT