
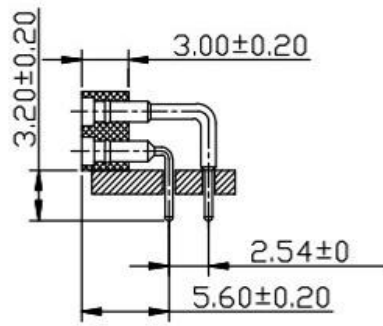

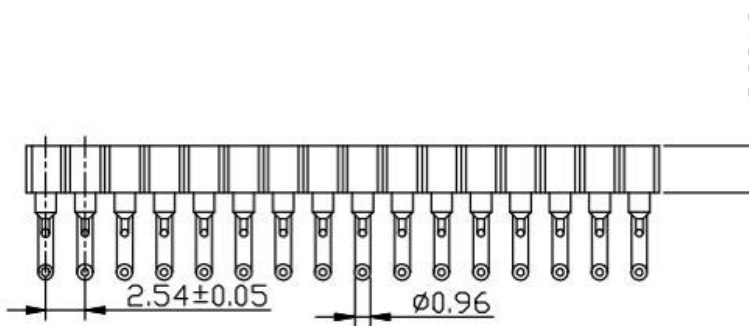
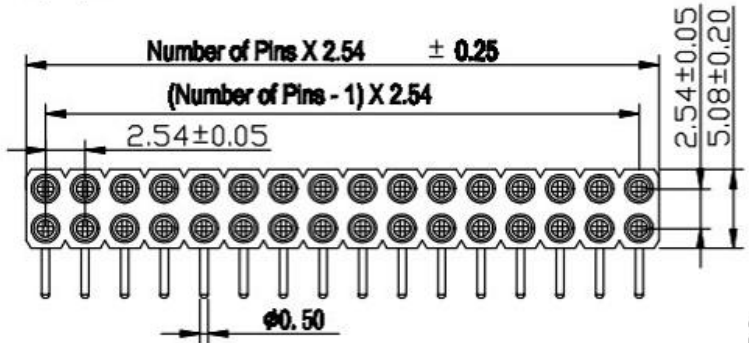
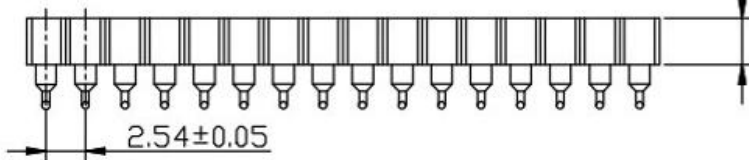


RoHS


REV	ECN NO	DESCRIPTION	DATE	NAME
A		REV		

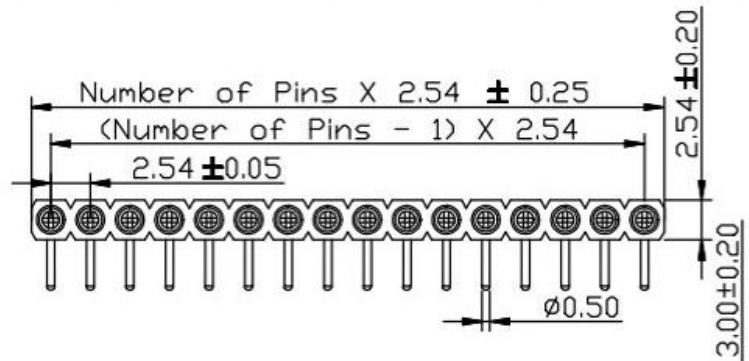

Technical Specs:

- Insulator: Black glass filled polyester PPS-GF30-FR
- Flammability: UL 94V-0
- Sleeve: Brass (C3604)
- Contact clip(4 finger): Beryllium copper(C1720)
- Accepted pin: Ø0.38 to 0.64mm
- Force: (polished steel gauge Ø0.43mm)
- Insertion: 2 N typ
- Withdrawal: 1 N typ
- Mechanical life: min500 cycles
- Rated current: 3A
- Contact resistance: max 10mΩ
- Dielectric resistance: Min 1000V RMS
- Coplanarity SMD: max 0.1 mm(measured on terminations: 25 mm long connectors)

Ordering Information

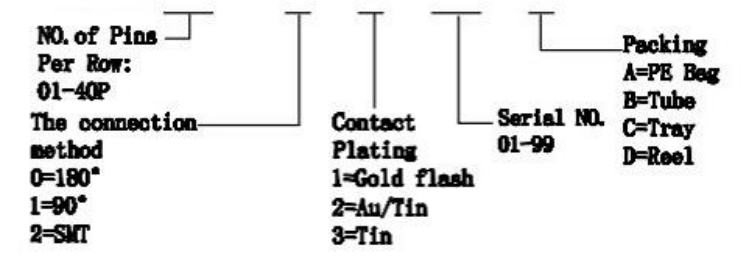

广东科斯达电子科技有限公司

STANDARD TOLERANCE (EXCEPT SPECIFIED)	
LINER	ANGLES
.0 ±0.30	0.° ±3°
.00 ±0.20	.0° ±2°
.000 ±0.10	.00° ±1°

TITLE	HL 70mm-1. IC Socket 20-P Single row/Double row 90° Type	DRAWN BY	Lujunhui	18.11.10
PART NO		CHECKED BY		
DRAWING NO		APPROVED BY		
SCALE	1:1	UNIT	mm	PAGE 1/1
				SIZE A4