

RoHS

REV	ECN NO	DESCRIPTION	DATE	NAME
A		NEW		

Specifications

- 1.Current Rating:1.0Amps
- 2.Insulation Resistance:1000 MΩ min.
- 3.Dielectric withstanding Voltage: 500V AC/DC
- 4.Contact Resistance:20 mΩ max.
- 5.Operating Temperature:−40℃ to+105℃
- 6.Contact Material: Brass
- 7.Insulation Material:As follows,UL94V−0,Black
- 8.Plated: Au Over Ni

Ordering Information





Insulation Height*Wide (H*W)	NO. of Pins Per Row: 1-50P	Insulation Material Option:	Contact Plating	Serial NO. 01-69	Packing
Option:					A=PE Bag
10=1.0*3.0		1=PBT	0=0.8" Gold		B=Tube
15=1.5*2.3		2=PPS	1=Au1" Gold		C=Tray
20=2.0*3.0		3=NY6T	2=Au1.5" Gold		D=Reel
		4=LCP	3=Au2" Gold		
		5=NY66	4=Au3" Gold		
		6=Customized	5=Au5" Gold		
		7=NY46	6=Customized		
		8=NY9T	7=Gold/Tin		
			8=Tin		

Dimension antitheses list					
ITEM	PC	PB	PA	H	Pin Length
Standard	5.60	2.70	2.80	2.00	6.40
Alternate					

广东科斯达开关厂

TITLE	PH1.27mm Pin Header Dual Row SMT	DRAWN BY	YTT	16.02.03
PART NO		CHECKED BY		
DRAWING NO		APPROVED BY		
SCALE	1:1	UNIT	mm	PAGE
				1/1
				SIZE
				A4

STANDARD TOLERANCE (EXCEPT SPECIFIED)			
LINER		ANGLES	
.0	±0.30	0.°	±3°
.00	±0.20	.0°	±2°
.000	±0.10	.00°	±1°

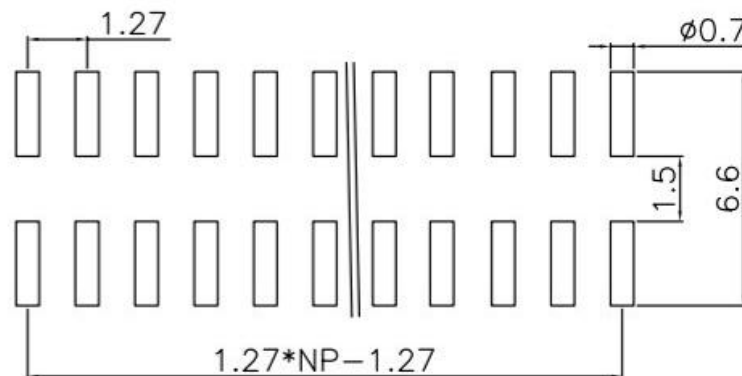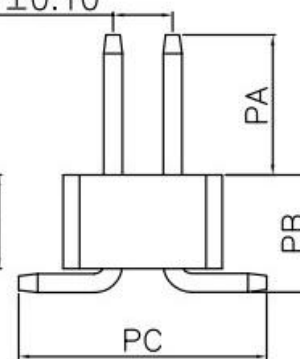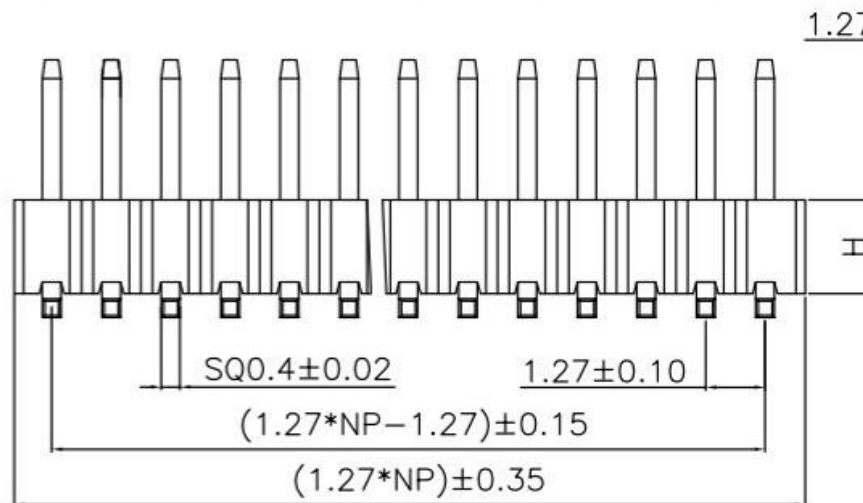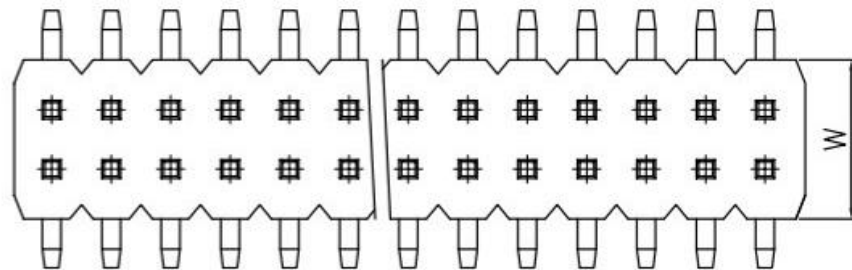

PCB LAYOUT