





RoHS

REV	ECN NO	DESCRIPTION	DATE	NAME
A		NEW		

Technical Specs:

Insulator: NY6T
Flammability: UL 94V-O
Sleeve: Brass
Contact clip(4/6 finger): Beryllium copper(C17 200)/Phosphor Bronze
Accepted pin: Ø0.40 to 0.56mm
Forces: (polished steel gauge Ø0.43mm)
 -Insertion 2 N typ
 -Withdrawal 1 N typ
Mechanical life: min500 cycles
Rated current: 3A
Contact resistance: max 10m Ω
Dielectric resistance: Min 1000V RMS
Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

Ordering Information

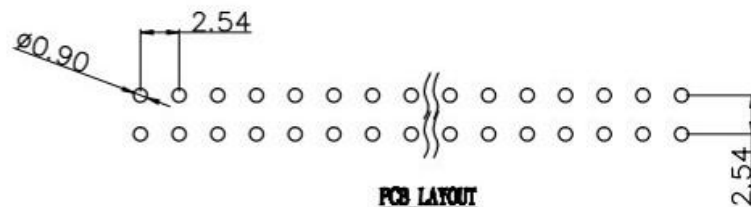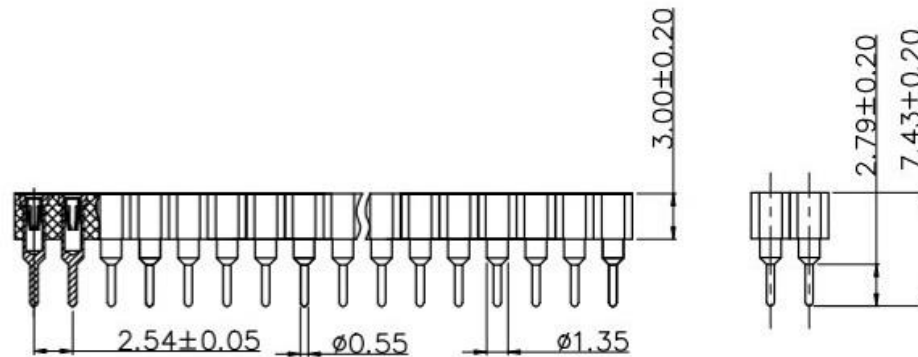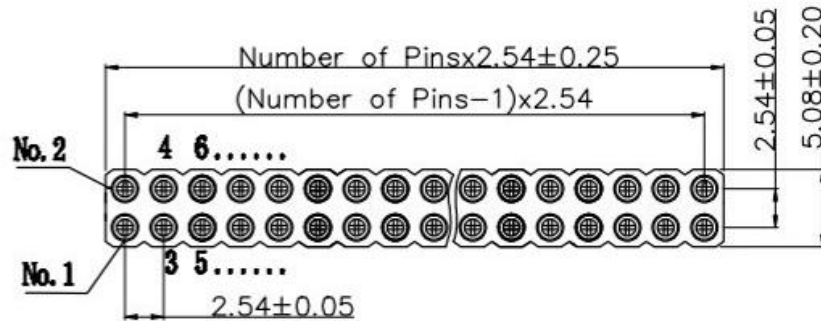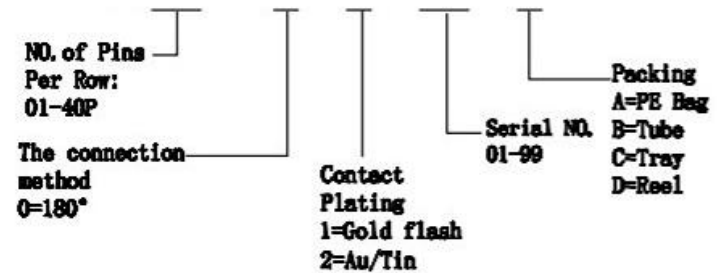

广东科斯达电子科技有限公司

STANDARD TOLERANCE (EXCEPT SPECIFIED)

LINER	ANGLES
.0 ± 0.30	0.° ± 3°
.00 ± 0.20	.0° ± 2°
.000 ± 0.10	.00° ± 1°

TITLE	FEEL 5mm Modified Female Header H=0.0 Double Row Straight Type	DRAWN BY	Lujunhui	18.11.06
PART NO		CHECKED BY		
DRAWING NO		APPROVED BY		
SCALE	1:1	UNIT	mm	PAGE 1/1
				SIZE A4